



Lighting your needs

---

# PRODUCT CATALOGUE

— 2020/21

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)







## CONTENTS

---

— COMPANY	OUR PROFILE	03
— PRODUCTS	● WARNING LAMPS	09
	● MULTIFUNCTIONAL REAR LAMPS	27
	● FRONT POSITION LAMPS & DRL	57
	● DIRECTION INDICATOR LAMPS	63
	● REVERSING LAMPS	71
	● FOG LAMPS	77
	● STOP & 3rd STOP LAMPS	81
	● WORK LAMPS & HEADLAMPS	85
	● NUMBER PLATE LAMPS	91
	● MARKER LAMPS	95
	● INTERIOR LAMPS	125
	● REFLEX REFLECTORS	133
	● WIRING KITS & VARIOUS PARTS	137





## OUR PROFILE

DASTERI is located in Alexandroupoli, Northern Greece and has been active since 1976 in the manufacturing of vehicle lighting, in a vertically integrated production.



### — Productivity and Innovation

By constantly investing in highly qualified staff and new technologies our company is today an established European company that exports its products to 48 countries and multiple distribution points around the world. Dasteri's products are manufactured according to the specifications of the Quality Management System ISO 9001 and fully meet the requirements of European and international markets.



### — Growth and Development

Today, Dasteri possesses the necessary experience and expertise since it has completed a large variety of projects with utter success through open and international tenders. With a commitment to research and planning for innovative services and products, Dasteri continues to make large investments in terms of means and efforts to meet the market requirements in the best possible way.

Dasteri's success is the result of continuous research for quality at every stage of production. The company has a large number of professionals who have the know-how in design, production and marketing in order to service our customers.



### — Vertically Integrated Production

Both NIK. DASTERIDIS SA (MFG) and DASTERI SYSTEMS SA, by investing in pioneer technology, have managed to address their customers needs in the best possible way. All the products are manufactured in two completely self-sufficient, privately-owned production facilities of 15.500 square metres:

- Research and development department where solutions for the ever changing market requirements, new ideas, materials, design and construction techniques are developed.
- Study and design department that provides solutions to customer needs.
- Fully equipped moulding department with software and cutting-edge generation CNC machines.
- Expert production and assembly units equipped with new generation machines and staffed with the most qualified and trained personnel.
- Quality control department where tests are performed in order to ensure that our products fully meet the European and international standards.
- Customer service which aims to resolve problems and to satisfy the needs of our customers.









## OUR PRINCIPLES

Our position as a leading company opens up unique opportunities for us to contribute to a sustainable future.

### — High Quality Service



Fostered by reliable cooperation with our customers, our unremitting service to their needs aims not just to solve problems but to thoroughly meet their contemporary demands, too.

Our professionalism combined with friendly and prompt service are the principles that best describe our identity and designate our relationship with all our partners and customers; principles that define every contact we make with them.

### — Responsibility and Reliability



Our main concern is the consistency with which we treat every customer, but also the environment in general. With respect and sincerity we commit to our promises in terms of delivery and outcome, thereby nurturing personal relationships of mutual trust with our customers.

Respect for the environment and its protection, as well as contribution to social issues, are matters integrated into our operating principles and philosophy. For this reason, our production processes are environmentally friendly and undertaken with full awareness to ensure ecological protection standards.

### — Corporate Quality



The success of NIK. DASTERIDIS SA (MFG) and DASTERI SYSTEMS SA is the result of a continuous research for quality in every step of the productive process. All NIK. DASTERIDIS SA (MFG) and DASTERI SYSTEMS SA products consist of the most excellent quality according to the requirements of ISO 9001 (Quality Management System), ISO 14001 (Environmental Management System) and OHSAS 18001:2007 (Occupational Health and Safety Assessment) as well as the international models and correspond completely to the requirements of the international market.




The attentive selection of the materials, the adaptation of effective methods and the strict inspection of the productive circle, constitute the quality guarantee of all Dasteri products.



### — Customer-Centered Philosophy

The continuous service of the customer's needs and the professional cooperation, aims to provide solutions to their problems and to meet with the best possible way their contemporary demands. The high quality services that NIK. DASTERIDIS SA (MFG) and DASTERI SYSTEMS SA provide to their customers, confirm the choice and satisfy their requirements and expectations.



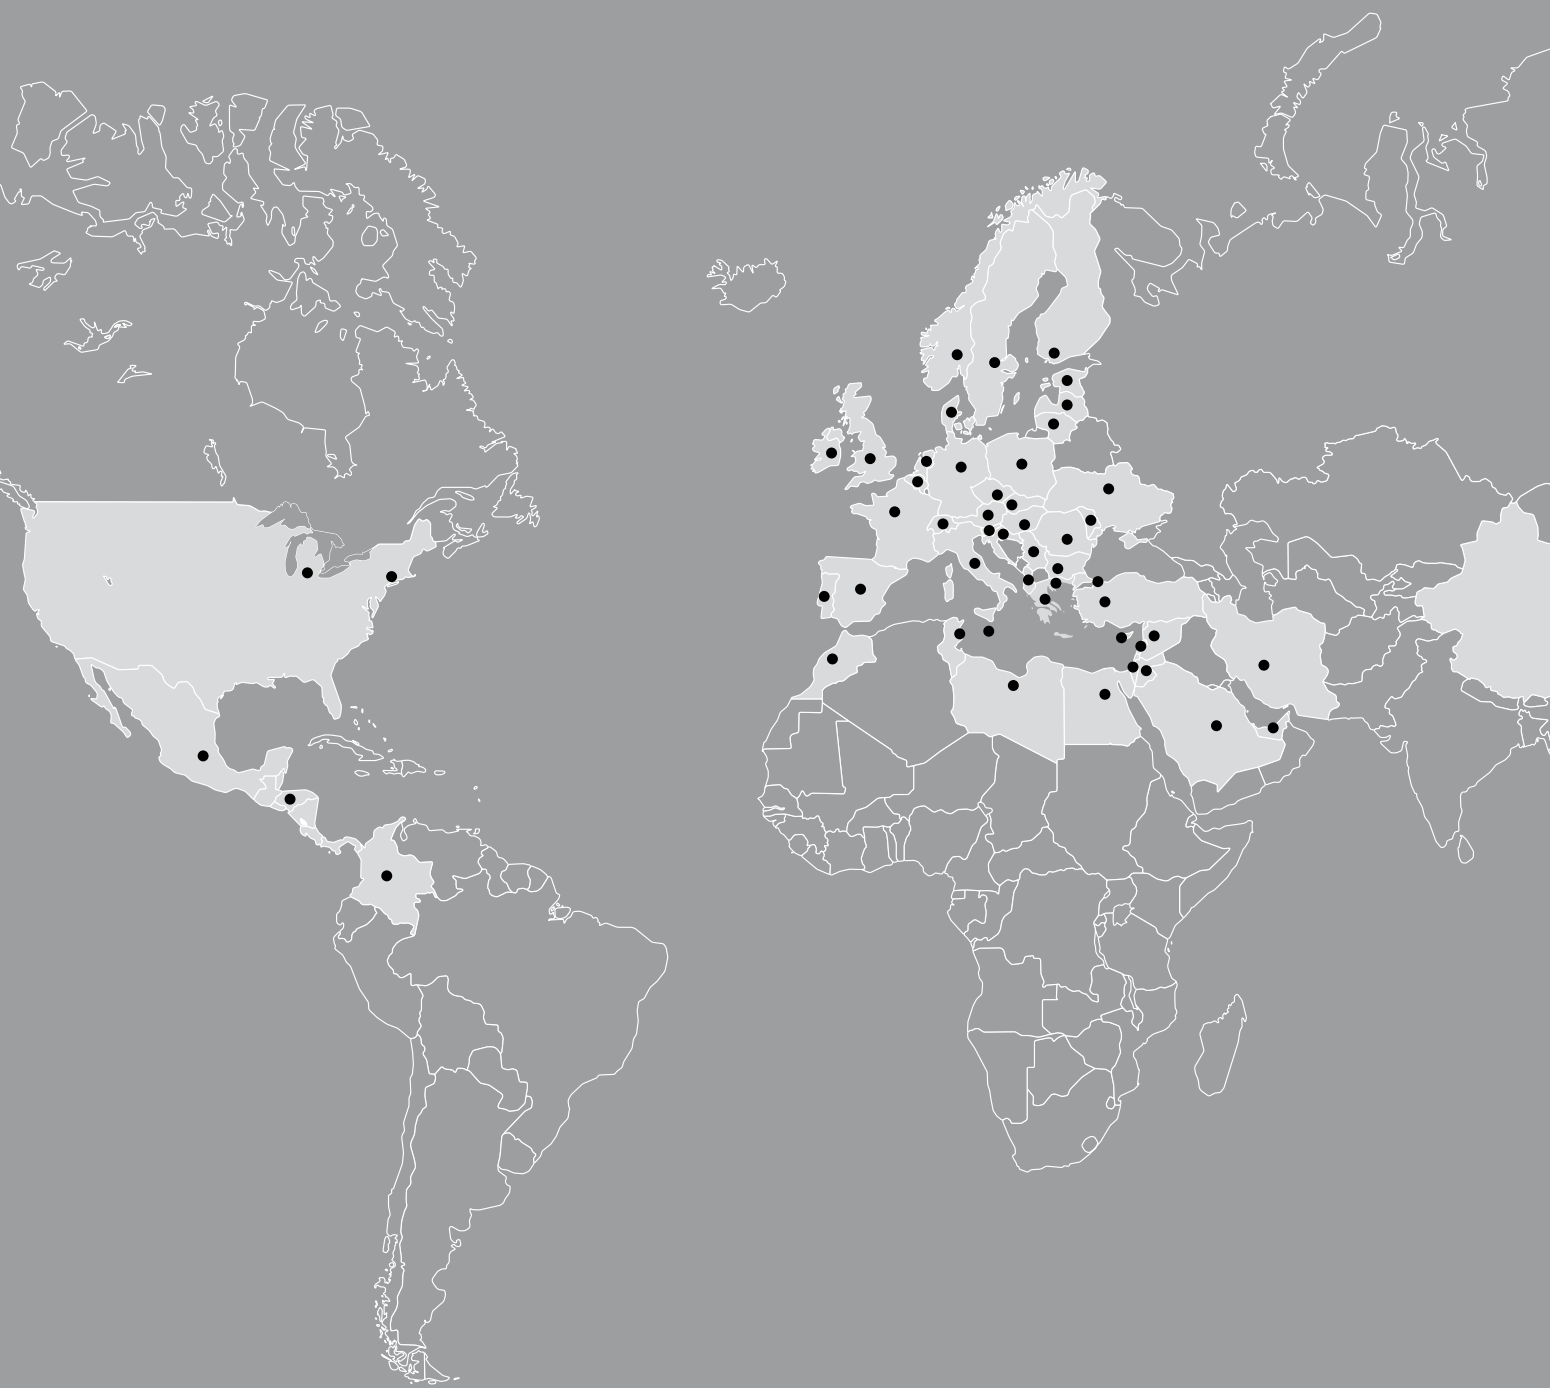



## GLOBAL PRESENCE

Dasteri is present in key markets all around the world, with multiple distribution points.



- |                |               |              |
|----------------|---------------|--------------|
| ALBANIA        | IRELAND       | ROMANIA      |
| AUSTRIA        | ISRAEL        | SAUDI ARABIA |
| BELGIUM        | ITALY         | SERBIA       |
| BULGARIA       | JORDAN        | SINGAPORE    |
| CHECH REPUBLIC | LATVIA        | SLOVAKIA     |
| CHINA          | LEBANON       | SLOVENIA     |
| COLOMBIA       | LIBYA         | SPAIN        |
| CYPRUS         | LITHUANIA     | SWEDEN       |
| DENMARK        | MALTA         | SWITZERLAND  |
| EGYPT          | MEXICO        | SYRIA        |
| ESTHONIA       | MOROCCO       | TURKEY       |
| FINLAND        | MOLDOVA       | TUNISIA      |
| FRANCE         | NETHERLANDS   | UAE          |
| GERMANY        | NEW CALEDONIA | UK           |
| GREECE         | NORWAY        | USA          |
| HUNGARY        | POLAND        |              |
| IRAN           | PORTUGAL      |              |



---

# WARNING LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)








## LED FLASHING BEACON / DSL-450 SERIES

### TECHNICAL SPECIFICATIONS


<b>Operating Voltage:</b>	10-30V DC
<b>Operating Temperature:</b>	-40 °C to +65 °C
<b>Consumption:</b>	From 14 to 28W (depends on the flashing frequency)
<b>Reverse polarity protection:</b>	Yes
<b>Flashing Frequency:</b>	10 Flashing Patterns
<b>Flash rate:</b>	150 fpm (single flash)
<b>Type of Protection:</b>	IP67



### WITH FLAT BASE

REF. No	
<b>DSL-450.05</b>	Clear lens, Amber LEDs
<b>DSL-450.06</b>	Clear lens, Red LEDs
<b>DSL-450.08</b>	Clear lens, Blue LEDs


ECE APPROVED    EMC APPROVED

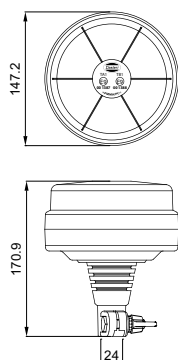

### WITH FLEXIBLE BASE

REF. No	
<b>DSL-450FL.05</b>	Clear lens, Amber LEDs
<b>DSL-450FL.06</b>	Clear lens, Red LEDs
<b>DSL-450FL.08</b>	Clear lens, Blue LEDs

ECE APPROVED    EMC APPROVED



### WITH MAGNETIC BASE

REF. No	
<b>DSL-450M.05</b>	Clear lens, Amber LEDs
<b>DSL-450M.06</b>	Clear lens, Red LEDs
<b>DSL-450M.08</b>	Clear lens, Blue LEDs

### SPARE LENS



REF. No	
<b>DSL-P-450.07</b>	Spare lens, Clear

ECE APPROVED    EMC APPROVED

## LED BEACON / DSL-470 SERIES

### TECHNICAL SPECIFICATIONS



<b>Operating Voltage:</b>	10-30V DC
<b>Operating Temperature:</b>	-40 °C to +65 °C
<b>Consumption:</b>	From 7.5W to 11W (depends on the flashing frequency)
<b>Reverse polarity protection:</b>	Yes
<b>Flashing Frequency:</b>	4 Flashing Patterns
<b>Flash rate:</b>	128 fpm (single flash)
<b>Type of Protection:</b>	IP67



### WITH FLAT BASE

REF. No	
<b>DSL-470.05</b>	Amber lens
<b>DSL-470.06</b>	Red lens
<b>DSL-470.08</b>	Clear lens, blue LEDs



ECE APPROVED    EMC APPROVED



### WITH FLEXIBLE BASE

REF. No	
<b>DSL-470FL.05</b>	Amber lens
<b>DSL-470FL.06</b>	Red lens
<b>DSL-470FL.08</b>	Clear lens, blue LEDs

ECE APPROVED    EMC APPROVED



### WITH MAGNETIC BASE

REF. No	
<b>DSL-470M.05</b>	Amber lens
<b>DSL-470M.06</b>	Red lens
<b>DSL-470M.08</b>	Clear lens, blue LEDs

### SPARE LENS


REF. No	
<b>DSL-P-470.05</b>	Spare lens, Amber
<b>DSL-P-470.06</b>	Spare lens, Red
<b>DSL-P-470.07</b>	Spare lens, Clear, for blue version beacon

ECE APPROVED    EMC APPROVED

## LED BEACON / DSL-480 SERIES

### TECHNICAL SPECIFICATIONS

<b>Operating Voltage:</b>	10-30V DC
<b>Consumption:</b>	From 26W to 42W (depends on the flashing frequency)
<b>Reverse polarity protection:</b>	Yes
<b>Flashing Frequency:</b>	10 Flashing Patterns
<b>Type of Protection:</b>	IP67

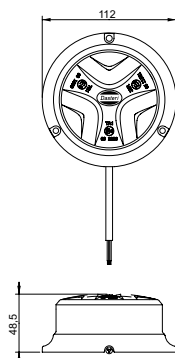


### WITH FLAT BASE

REF. No	
<b>DSL-480.05</b>	Amber lens
<b>DSL-480.06</b>	Red lens
<b>DSL-480.08</b>	Blue lens

ECE APPROVED

EMC APPROVED

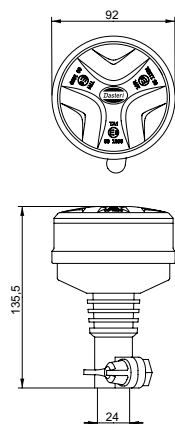

### WITH FLEXIBLE BASE

REF. No	
<b>DSL-480FL.05</b>	Amber lens
<b>DSL-480FL.06</b>	Red lens
<b>DSL-480FL.08</b>	Blue lens

ECE APPROVED

EMC APPROVED



### WITH MAGNETIC BASE

REF. No	
<b>DSL-480M.05</b>	Amber lens
<b>DSL-480M.06</b>	Red lens
<b>DSL-480M.08</b>	Blue lens


ECE APPROVED

EMC APPROVED

## LED BEACON / DLL & DLS SERIES

### TECHNICAL SPECIFICATIONS


<b>Operating Voltage:</b>	10-30V DC
<b>Flash rate:</b>	75 fpm
<b>Flash type:</b>	Triple flash
<b>Operating Temperature:</b>	-25 °C to +65 °C
<b>Consumption:</b>	12W
<b>Reverse polarity protection:</b>	Yes
<b>Load Dump:</b>	Protected
<b>Sync:</b>	Can be synchronized up to 16 beacons
<b>Type of Protection:</b>	IP67



### FLAT BASE / LONG DOME

REF. No


<b>DLL-S1M.05</b>	Amber lens
<b>DLL-S1M.06</b>	Red lens
<b>DLL-S1M.08</b>	Blue lens
<b>DLL-S1M.09</b>	Green lens



### FLEXIBLE BASE / LONG DOME

REF. No


<b>DLL-SFL.05</b>	Amber lens
<b>DLL-SFL.06</b>	Red lens
<b>DLL-SFL.08</b>	Blue lens
<b>DLL-SFL.09</b>	Green lens



### FLAT BASE / SHORT DOME

REF. No

<b>DLS-S1M.05</b>	Amber lens
<b>DLS-S1M.06</b>	Red lens
<b>DLS-S1M.08</b>	Blue lens
<b>DLS-S1M.09</b>	Green lens



### FLEXIBLE BASE / SHORT DOME



REF. No

<b>DLS-SFL.05</b>	Amber lens
<b>DLS-SFL.06</b>	Red lens
<b>DLS-SFL.08</b>	Blue lens
<b>DLS-SFL.09</b>	Green lens

## XENON BEACON / 440 SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-36V DC  
**Flash rate:** 126 fpm (single flash)  
**Flash type:** Single / Double  
**Consumption:** 22W  
**Type of Protection:** IP54



### WITH FLAT BASE

REF. No

**440/DV430.05** Amber lens  
**440/DV430.06** Red lens  
**440/DV430.08** Blue lens

### MAGNETIC BASE

REF. No

**440M/DV430.05** Amber lens  
**440M/DV430.06** Red lens  
**440M/DV430.08** Blue lens

### FASTENING ON TUBE

REF. No

**441/DV430.05** Amber lens  
**441/DV430.06** Red lens  
**441/DV430.08** Blue lens



### SPARE LENS

REF. No

**P-430.05** Spare lens, Amber  
**P-430.06** Spare lens, Red  
**P-430.08** Spare lens, Blue

ECE APPROVED

EMC APPROVED



### WITH FLAT BASE

REF. No

**440/DV410.05** Amber lens  
**440/DV410.06** Red lens  
**440/DV410.08** Blue lens

### MAGNETIC BASE

REF. No

**440M/DV410.05** Amber lens  
**440M/DV410.06** Red lens  
**440M/DV410.08** Blue lens

### FASTENING ON TUBE

REF. No

**441/DV410.05** Amber lens  
**441/DV410.06** Red lens  
**441/DV410.08** Blue lens

### SPARE LENS

REF. No

**P-410.05** Spare lens, Amber  
**P-410.06** Spare lens, Red  
**P-410.08** Spare lens, Blue


ECE APPROVED

EMC APPROVED

## XENON BEACON DXL/DXS SERIES

### TECHNICAL SPECIFICATIONS

<b>Operating Voltage:</b>	10-100V DC & 20-72V AC
<b>Flash rate:</b>	70-85 fpm
<b>Flash type:</b>	Single flash
<b>Operating Temperature:</b>	-25 °C to +65 °C
<b>Consumption:</b>	7W
<b>Reverse polarity protection:</b>	Yes
<b>Load Dump:</b>	Protected
<b>Type of Protection:</b>	IP67




### FLAT BASE / LONG DOME

REF. No

- DXL-5MV5M.05** Amber lens
- DXL-5MV5M.06** Red lens
- DXL-5MV5M.08** Blue lens
- DXL-5MV5M.09** Green lens


\*With 5m cable



### FLEXIBLE BASE / LONG DOME

REF. No

- DXL-FL5MV.05** Amber lens
- DXL-FL5MV.06** Red lens
- DXL-FL5MV.08** Blue lens
- DXL-FL5MV.09** Green lens




### FLAT BASE / SHORT DOME

REF. No

- DXS-5MV5M.05** Amber lens
- DXS-5MV5M.06** Red lens
- DXS-5MV5M.08** Blue lens
- DXS-5MV5M.09** Green lens

\*With 5m cable



### FLEXIBLE BASE / SHORT DOME

REF. No


- DXS-FL5MV.05** Amber lens
- DXS-FL5MV.06** Red lens
- DXS-FL5MV.08** Blue lens
- DXS-FL5MV.09** Green lens



## ROTATING BEACON / 410 SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 55W (H3) / 24V 70W (H3)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54




### WITH FLAT BASE

REF. No  
**410/12.05** Amber lens - 12V  
**410/12.06** Red lens - 12V  
**410/12.08** Blue lens - 12V

REF. No  
**410/24.05** Amber lens - 24V  
**410/24.06** Red lens - 24V  
**410/24.08** Blue lens - 24V

ECE APPROVED




### WITH FLEXIBLE BASE

REF. No  
**411/12.05** Amber lens - 12V  
**411/12.06** Red lens - 12V  
**411/12.08** Blue lens - 12V

REF. No  
**411/24.05** Amber lens - 24V  
**411/24.06** Red lens - 24V  
**411/24.08** Blue lens - 24V

ECE APPROVED




### WITH MAGNETIC BASE

REF. No  
**410M/12.05** Amber lens - 12V  
**410M/12.06** Red lens - 12V  
**410M/12.08** Blue lens - 12V

REF. No  
**410M/24.05** Amber lens - 24V  
**410M/24.06** Red lens - 24V  
**410M/24.08** Blue lens - 24V

ECE APPROVED



### WITH SINGLE BOLT M12

REF. No  
**412/12.05** Amber lens - 12V  
**412/12.06** Red lens - 12V  
**412/12.08** Blue lens - 12V

REF. No  
**412/24.05** Amber lens - 24V  
**412/24.06** Red lens - 24V  
**412/24.08** Blue lens - 24V

### SPARE LENS

REF. No  
**P-410.05** Amber  
**P-410.06** Red  
**P-410.08** Blue


ECE APPROVED



## ROTATING BEACON / 430 SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 55W (H3) / 24V 70W (H3)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54




### WITH FLAT BASE

REF. No  
**430/12.05** Amber lens - 12V  
**430/12.06** Red lens - 12V  
**430/12.08** Blue lens - 12V

REF. No  
**430/24.05** Amber lens - 24V  
**430/24.06** Red lens - 24V  
**430/24.08** Blue lens - 24V

ECE APPROVED




### WITH FLEXIBLE BASE

REF. No  
**431/12.05** Amber lens - 12V  
**431/12.06** Red lens - 12V  
**431/12.08** Blue lens - 12V

REF. No  
**431/24.05** Amber lens - 24V  
**431/24.06** Red lens - 24V  
**431/24.08** Blue lens - 24V

ECE APPROVED




### WITH MAGNETIC BASE

REF. No  
**430M/12.05** Amber lens - 12V  
**430M/12.06** Red lens - 12V  
**430M/12.08** Blue lens - 12V

REF. No  
**430M/24.05** Amber lens - 24V  
**430M/24.06** Red lens - 24V  
**430M/24.08** Blue lens - 24V

ECE APPROVED



### WITH SINGLE BOLT M12

REF. No  
**432/12.05** Amber lens - 12V  
**432/12.06** Red lens - 12V  
**432/12.08** Blue lens - 12V

REF. No  
**432/24.05** Amber lens - 24V  
**432/24.06** Red lens - 24V  
**432/24.08** Blue lens - 24V

### SPARE LENS


REF. No  
**P-430.05** Amber  
**P-430.06** Red  
**P-430.08** Blue

ECE APPROVED

## ROTATING BEACON / 460 SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC  
**Consumption:** 12V 55W (H1) / 24V 70W (H1)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54




ECE APPROVED

### WITH FLAT BASE

REF. No

**460/12-24.05** Amber lens  
**460/12-24.06** Red lens  
**460/12-24.08** Blue lens  
**460/12-24.09** Green lens




ECE APPROVED

### WITH FLEXIBLE BASE

REF. No

**461/12-24.05** Amber lens  
**461/12-24.06** Red lens  
**461/12-24.08** Blue lens  
**461/12-24.09** Green lens



ECE APPROVED

### WITH MAGNETIC BASE

REF. No

**460M/12-24.05** Amber lens  
**460M/12-24.06** Red lens  
**460M/12-24.08** Blue lens  
**460M/12-24.09** Green lens

### SPARE LENS


REF. No

**P-460.05** Spare lens, amber  
**P-460.06** Spare lens, red  
**P-460.08** Spare lens, blue  
**P-460.09** Spare lens, green

## ROTATING BEACON / 420 SERIES DUAL VOLTAGE

### TECHNICAL SPECIFICATIONS


**Operating Voltage:** 9-33V DC  
**Consumption:** 12V 55W (H1) / 24V 70W (H1)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54



### WITH FLAT BASE

REF. No  
**420/12-24.05** Amber lens  
**420/12-24.06** Red lens  
**420/12-24.08** Blue lens  
**420/12-24.09** Green lens


ECE APPROVED



### WITH FLEXIBLE BASE

REF. No  
**421/12-24.05** Amber lens  
**421/12-24.06** Red lens  
**421/12-24.08** Blue lens  
**421/12-24.09** Green lens

ECE APPROVED



### WITH MAGNETIC BASE

REF. No  
**420M/12-24.05** Amber lens  
**420M/12-24.06** Red lens  
**420M/12-24.08** Blue lens  
**420M/12-24.09** Green lens

### SPARE LENS


REF. No  
**P-420.05** Spare lens, Amber  
**P-420.06** Spare lens, Red  
**P-420.08** Spare lens, Blue  
**P-420.09** Spare lens, Green

ECE APPROVED

## ROTATING BEACON / 420 SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 21W / 24V 21W (BA15S)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54




### WITH FLAT BASE

REF. No  
**420/12.05** Amber lens - 12V  
**420/12.06** Red lens - 12V  
**420/12.08** Blue lens - 12V  
**420/12.09** Green lens - 12V

REF. No  
**420/24.05** Amber lens - 24V  
**420/24.06** Red lens - 24V  
**420/24.08** Blue lens - 24V  
**420/24.09** Green lens - 24V

ECE APPROVED




### FASTENING ON TUBE

REF. No  
**421/12.05** Amber lens - 12V  
**421/12.06** Red lens - 12V  
**421/12.08** Blue lens - 12V  
**421/12.09** Green lens - 12V

REF. No  
**421/24.05** Amber lens - 24V  
**421/24.06** Red lens - 24V  
**421/24.08** Blue lens - 24V  
**421/24.09** Green lens - 24V

ECE APPROVED



### WITH MAGNETIC BASE

REF. No  
**420M/12.05** Amber lens - 12V  
**420M/12.06** Red lens - 12V  
**420M/12.08** Blue lens - 12V  
**420M/12.09** Green lens - 12V



REF. No  
**420M/24.05** Amber lens - 24V  
**420M/24.06** Red lens - 24V  
**420M/24.08** Blue lens - 24V  
**420M/24.09** Green lens - 24V

### SPARE LENS

REF. No  
**P-420.05** Amber  
**P-420.06** Red  
**P-420.08** Blue  
**P-420.09** Green

ECE APPROVED

## ROTATING BEACON



ECE APPROVED

REF. No		REF. No	
<b>400/12.05</b>	Amber lens - 12V	<b>400/24.05</b>	Amber lens - 24V
<b>400/12.06</b>	Red lens - 12V	<b>400/24.06</b>	Red lens - 24V
<b>400/12.08</b>	Blue lens - 12V	<b>400/24.08</b>	Blue lens - 24V



### SPARE LENS

REF. No		TECHNICAL SPECIFICATIONS	
<b>P-400.05</b>	Amber	<b>Operating Voltage:</b>	12 or 24V DC
<b>P-400.06</b>	Red	<b>Consumption:</b>	12V 55W / 24V 70W
<b>P-400.08</b>	Blue	<b>Flash rate:</b>	210 fpm
		<b>Type of Protection:</b>	IP54

## ROTATING BEACON / 425 SERIES

### TECHNICAL SPECIFICATIONS


**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 21W / 24V 21W (BA15S)  
**Flash rate:** 210 fpm  
**Type of Protection:** IP54



ECE APPROVED

### WITH FLAT BASE



REF. No		REF. No	
<b>425/12.05</b>	Amber lens - 12V	<b>425/24.05</b>	Amber lens - 24V
<b>425/12.06</b>	Red lens - 12V	<b>425/24.06</b>	Red lens - 24V
<b>425/12.08</b>	Blue lens - 12V	<b>425/24.08</b>	Blue lens - 24V
<b>425/12.09</b>	Green lens - 12V	<b>425/24.09</b>	Green lens - 24V



ECE APPROVED

### FASTENING ON TUBE

REF. No		REF. No	
<b>426/12.05</b>	Amber lens - 12V	<b>426/24.05</b>	Amber lens - 24V
<b>426/12.06</b>	Red lens - 12V	<b>426/24.06</b>	Red lens - 24V
<b>426/12.08</b>	Blue lens - 12V	<b>426/24.08</b>	Blue lens - 24V
<b>426/12.09</b>	Green lens - 12V	<b>426/24.09</b>	Green lens - 24V



ECE APPROVED

### WITH MAGNETIC BASE

REF. No		REF. No	
<b>425M/12.05</b>	Amber lens - 12V	<b>425M/24.05</b>	Amber lens - 24V
<b>425M/12.06</b>	Red lens - 12V	<b>425M/24.06</b>	Red lens - 24V
<b>425M/12.08</b>	Blue lens - 12V	<b>425M/24.08</b>	Blue lens - 24V
<b>425M/12.09</b>	Green lens - 12V	<b>425M/24.09</b>	Green lens - 24V


### SPARE LENS

REF. No			
<b>P-425.05</b>	Amber	<b>P-425.06</b>	Red
<b>P-425.08</b>	Blue	<b>P-425.09</b>	Green

## LED LIGHT BAR / LB-500 SERIES

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** From 40W to 56W (according to color/flashing frequency)
- Reverse polarity protection:** Yes
- Flashing Frequency:** 10 Flashing Patterns
- Type of Protection:** IP67

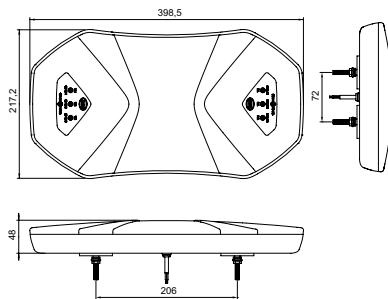

ECE APPROVED

EMC APPROVED

### WITH FLAT BASE

- REF. No
- LB-500.05** Clear lens, Amber LEDs
- LB-500.06** Clear lens, Red LEDs
- LB-500.08** Clear lens, Blue LEDs


### WITH MAGNETIC BASE

- REF. No
- LB-500M.05** Clear lens, Amber LEDs
- LB-500M.06** Clear lens, Red LEDs
- LB-500M.08** Clear lens, Blue LEDs

## LED LIGHT BAR / LB-600 SERIES

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** From 27W to 109W (according to modules/color/flashing frequency)
- Reverse polarity protection:** Yes
- Flashing Frequency:** 10 Flashing Patterns
- Type of Protection:** IP67

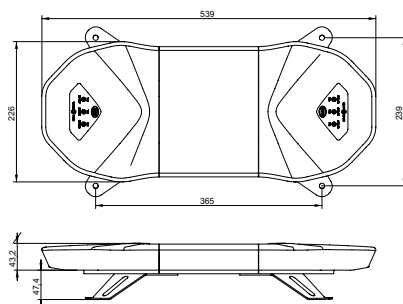

ECE APPROVED

EMC APPROVED

- REF. No
- LB-6XX.05** Clear lens, Amber LEDs
- LB-6XX.06** Clear lens, Red LEDs
- LB-6XX.08** Clear lens, Blue LEDs


Where XX add number of LED modules (from 01 to 12)  
 Dimensions vary according to number of modules from 539mm to 2330mm (module length 160mm)

LB-601	1 LED module	539mm
LB-602	2 LED module	699mm
LB-603	3 LED module	859mm
LB-604	4 LED module	1019mm
LB-605	5 LED module	1179mm
LB-606	6 LED module	1339mm
LB-607	7 LED module	1499mm
LB-608	8 LED module	1659mm
LB-609	9 LED module	1819mm
LB-610	10 LED module	1979mm
LB-611	11 LED module	2139mm
LB-612	12 LED module	2299mm

## LED MINI LIGHT BAR

### TECHNICAL SPECIFICATIONS


<b>Operating Voltage:</b>	10-30V DC
<b>Operating Temperature:</b>	-40 °C to +65 °C
<b>Consumption:</b>	From 28 to 56W (depends on the flashing frequency)
<b>Reverse polarity protection:</b>	Yes
<b>Flashing Frequency:</b>	10 flashing patterns
<b>Flash rate:</b>	150 fpm (single flash)
<b>Type of Protection:</b>	IP67

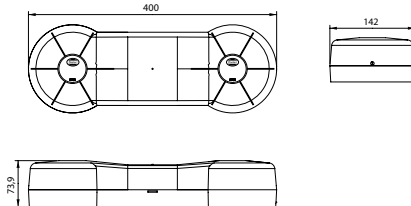

ECE APPROVED

### WITH FLAT BASE

REF. No	
<b>LB-450.05</b>	Clear lens, Amber LEDs
<b>LB-450.06</b>	Clear lens, Red LEDs
<b>LB-450.08</b>	Clear lens, Blue LEDs

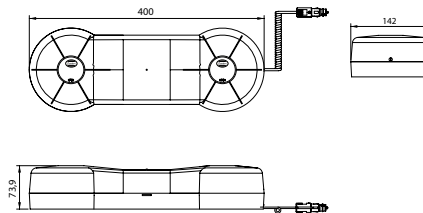

ECE APPROVED

### WITH MAGNETIC BASE

REF. No	
<b>LB-450M.05</b>	Clear lens, Amber LEDs
<b>LB-450M.06</b>	Clear lens, Red LEDs
<b>LB-450M.08</b>	Clear lens, Blue LEDs


### SPARE LENS

REF. No	
<b>P-LB-450</b>	Clear

## MINI ROTATING LIGHT BAR

### TECHNICAL SPECIFICATIONS


<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>	12V 2x55W (H1) / 24V 2x70W (H1)
<b>Flash rate:</b>	210 fpm/unit
<b>Type of Protection:</b>	IP54



ECE APPROVED

### WITH FLAT BASE

REF. No	
<b>LBR-460.05</b>	Amber lens
<b>LBR-460.06</b>	Red lens
<b>LBR-460.08</b>	Blue lens



ECE APPROVED


### WITH MAGNETIC BASE

REF. No	
<b>LBR-460M.05</b>	Amber lens
<b>LBR-460M.06</b>	Red lens
<b>LBR-460M.08</b>	Blue lens

### SPARE LENS

REF. No	
<b>P-LBR-460.05</b>	Amber lens
<b>P-LBR-460.06</b>	Red lens
<b>P-LBR-460.08</b>	Blue lens

## DSL-X10 SERIES

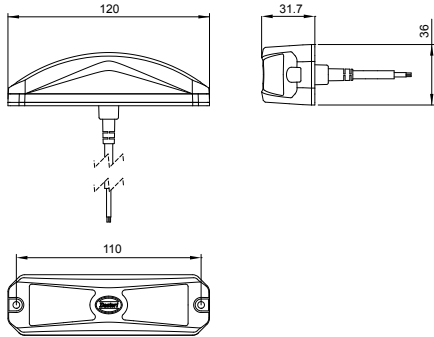

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Operating Temperature:** -40 °C to +65 °C  
**Consumption:** 9-13W depending on color and pattern  
**Flashing Frequency:** 10 flashing patterns  
**Type of Protection:** IP67


REF. No

**DSL-X10.05** Clear lens, Amber LEDs  
**DSL-X10.06** Clear lens, Red LEDs  
**DSL-X10.08** Clear lens, Blue LEDs

ECE APPROVED

EMC APPROVED

## DSL-X20 SERIES

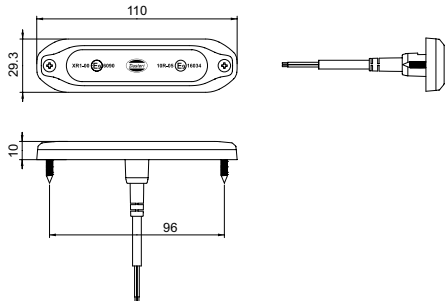

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Operating Temperature:** -40 °C to +65 °C  
**Consumption:** 6-17W depending on color and pattern  
**Flashing Frequency:** 10 flashing patterns  
**Type of Protection:** IP67


REF. No

**DSL-X20.05** Clear lens, Amber LEDs  
**DSL-X20.06** Clear lens, Red LEDs  
**DSL-X20.08** Clear lens, Blue LEDs

ECE APPROVED

EMC APPROVED

## MINI LED FLASHING LAMP




### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Operating Temperature:** -40 °C to +65 °C  
**Consumption:** 4W  
**Flashing Frequency:** 33 flashing patterns  
**Type of Protection:** IP67

REF. No

**DSL-3SNA** Clear lens, Amber LEDs  
**DSL-3SNB** Clear lens, Blue LEDs  
**DSL-3SNR** Clear lens, Red LEDs  
**DSL-3SNW** Clear lens, White LEDs






## LED FLASHING LAMP GHOST SERIES

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Operating Temperature:** -40 °C to +65 °C  
**Consumption:** 18W  
**Flashing Frequency:** 3 flashing patterns / 33 flashing patterns  
**Type of Protection:** IP67

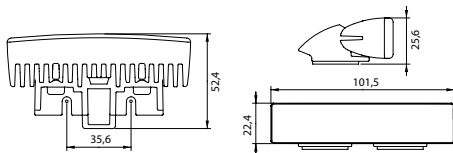


ECE APPROVED

### MULTI-MOUNT - 3 PATTERNS (ECE APPROVED)

REF. No  
**DSL-GHST1A** Amber LEDs  
**DSL-GHST1B** Blue LEDs  
**DSL-GHST1R** Red LEDs

### MULTI-MOUNT - 33 PATTERNS

REF. No  
**DSL-GHST1AS** Amber LEDs  
**DSL-GHST1BS** Blue LEDs  
**DSL-GHST1RS** Red LEDs  
**DSL-GHST1W** Clear LEDs  
**DSL-GHST1J** Blue-Red LEDs

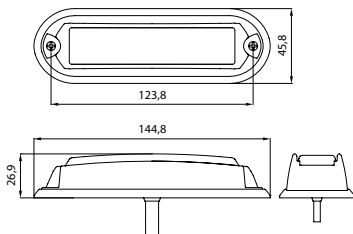

ECE APPROVED


### SURFACE - MOUNT - 3 PATTERNS (ECE APPROVED)

REF. No  
**DSL-GHST2A** Amber LEDs  
**DSL-GHST2B** Blue LEDs  
**DSL-GHST2R** Red LEDs

### SURFACE - MOUNT - 33 PATTERNS

REF. No  
**DSL-GHST2AS** Amber LEDs  
**DSL-GHST2BS** Blue LEDs  
**DSL-GHST2RS** Red LEDs  
**DSL-GHST2W** Clear LEDs  
**DSL-GHST2J** Blue-Red LEDs \* Add C for chrome housing

## LED FLASHING LAMP

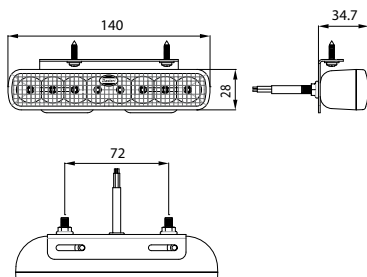

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10 - 30V DC  
**Operating Temperature:** -40 °C to +65 °C  
**Consumption:** 3,3W  
**Type of Protection:** IP67

REF. No  
**DSL-108X.05** Clear lens, Amber LEDs  
**DSL-108X.06** Clear lens, Red LEDs  
**DSL-108X.07** Clear lens, White LEDs  
**DSL-108X.08** Clear lens, Blue LEDs



---

# MULTI- FUNCTIONAL REAR LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)







## 7-FUNCTION REAR LED LAMP / DSL-2030 SERIES

TECHNICAL SPECIFICATIONS

- Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp, Side Marker
- Optional Functions:** Number Plate Lamp
- Operating Voltage:** 24V
- Consumption:** Rev.: 1,5W Fog: 3,1W Tail: 0,3W Stop: 1,7W D.I.: 2,1W End Out.: 0,15W S.M.: 1W N.P.L.: 1W
- Type of Protection:** IP67 for modules

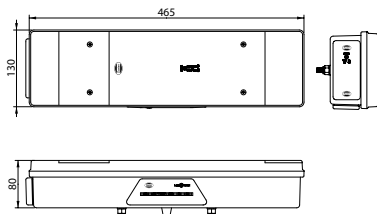


REF. No	NUMBER PLATE (PL)	PG PLUG (50 cm Cable)	ROUND PLUG (Schlemmer)	ROUND PLUG (7 pin AMP)
<b>DSL-2030SR (R)</b> <b>DSL-2031SR (L)</b>		•		
<b>DSL-2031PLSR (L)</b>	•	•		
<b>DSL-2032SR (R)</b> <b>DSL-2033SR (L)</b>			•	
<b>DSL-2033PLSR (L)</b>	•		•	
<b>DSL-2036SR (R)</b> <b>DSL-2037SR (L)</b>				ON THE SIDE
<b>DSL-2037PLSR (L)</b>	•			ON THE SIDE

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO DSL-P-2030 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LED LAMP / DSL-2040 SERIES

TECHNICAL SPECIFICATIONS

- Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp, Side Marker
- Optional Functions:** Number Plate Lamp
- Operating Voltage:** 24V
- Consumption:** Rev.: 1,5W Fog: 3,1W Tail: 0,3W Stop: 1,7W D.I.: 2,1W End Out.: 0,15W S.M.: 1W N.P.L.: 1W
- Type of Protection:** IP67

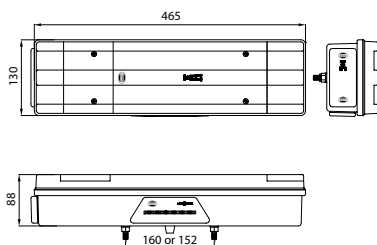



REF. No	NUMBER PLATE (PL)	PG PLUG (50 cm Cable)	ROUND PLUG (Schlemmer)
<b>DSL-2040SR (R)</b> <b>DSL-2041SR (L)</b>			•
<b>DSL-2041PLSR (L)</b>	•	•	
<b>DSL-2042SR (R)</b> <b>DSL-2043SR (L)</b>			•
<b>DSL-2043PLSR (L)</b>	•		•

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO DSL-P-2040 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LED LAMP / DSL-2050 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp, Side Marker  
**Optional Functions:** Number Plate Lamp  
**Operating Voltage:** 24V  
**Consumption:** Rev.: 1,5W Fog: 3,1W Tail: 0,3W Stop: 1,7W D.I.: 2,1W End Out.: 0,15W S.M.: 1W N.P.L.: 1W  
**Type of Protection:** IP67 for modules

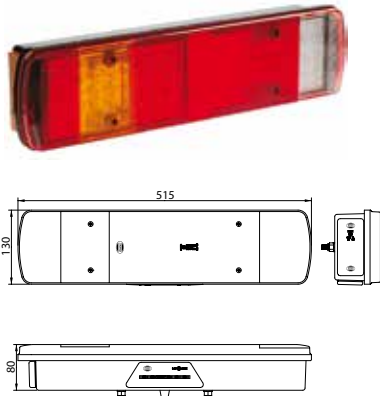

REF. No		NUMBER PLATE (PL)	PG PLUG (50 cm Cable)	ROUND PLUG (AMP On the side)
<b>DSL-2050SR</b>	(R)		•	
<b>DSL-2051SR</b>	(L)		•	
<b>DSL-2051PLSR</b>	(L)	•	•	
<b>DSL-2050SR.S</b>	(R)		•	
<b>DSL-2051SR.S</b>	(L)		•	BOTTOM SIDE
<b>DSL-2054SR</b>	For VOLVO (R)			
<b>DSL-2055SR</b>	(L)			
<b>DSL-2055PLSR</b>	For VOLVO (L)	•		
<b>DSL-2054SR.S</b>	For SCANIA (R)			
<b>DSL-2054SR162</b>	For SCANIA R (R)			
<b>DSL-2055PLSR163</b>	For SCANIA R (L)	•		
<b>DSL-2054SR167</b>	For SCANIA (R)			•
<b>DSL-2055PLSR.S</b>	For SCANIA (L)	•		•


NOTES: L: LEFT (side) / R: RIGHT (side)

SPARE LENS AVAILABLE REF. NO DSL-P-2050  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LED LAMP / DSL-2060 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Fog, Reverse, Direction Indicator, Reflex Reflector  
**Operating Voltage:** 10 - 30V DC  
**Consumption:** Stop 1,5W Tail, 0,5W Rev. 2W, Fog 2,5W, D.I. 1,5W  
**Type of Protection:** IP67

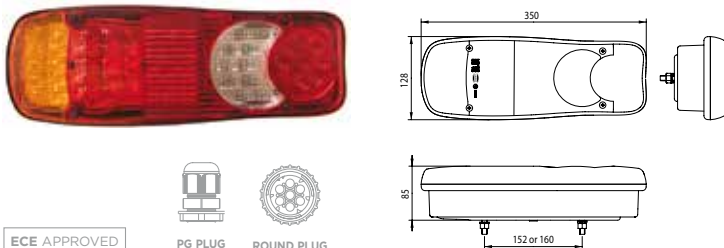

REF. No		PG PLUG (50 CM CABLE)	ROUND PLUG (AMP)	PG PLUG WITH 1m DUAL CABLE
<b>DSL-2060 (R)</b>	(R)	•		
<b>DSL-2061 (L)</b>	(L)			
<b>DSL-2062 (R)</b>	(R)		•	
<b>DSL-2063 (L)</b>	(L)		•	
<b>DSL-2064 (R)</b>	(R)		•	•
<b>DSL-2065 (L)</b>	(L)		•	•


NOTES: L: LEFT (side) / R: RIGHT (side)  
 \* NOT AVAILABLE FOR GERMAN MARKET

SPARE LENS AVAILABLE REF. NO DSL-P-2060  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LED LAMP / DSL-2060D SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Reversing, Fog, D.I., Reflex Reflector  
**Operating Voltage:** 10 - 30V DC  
**Consumption:** Stop 1.5W Tail 0.5W Fog 2.5W Rev 2W D.I. 1.5W  
**Type of Protection:** IP67

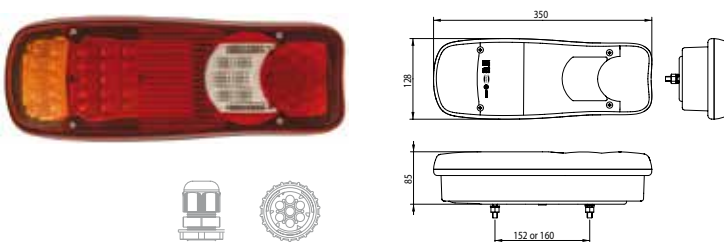

REF. No		PG PLUG (50 CM CABLE)	ROUND PLUG (AMP)	PG PLUG WITH 1m DUAL CABLE
<b>DSL-2060D (R)</b>	(R)	•		
<b>DSL-2061D (L)</b>	(L)			
<b>DSL-2062D (R)</b>	(R)		•	
<b>DSL-2063D (L)</b>	(L)		•	
<b>DSL-2064D (R)</b>	(R)		•	•
<b>DSL-2065D (L)</b>	(L)		•	•



NOTES: L: LEFT (side) / R: RIGHT (side)  
 \* NOT AVAILABLE FOR GERMAN MARKET

SPARE LENS AVAILABLE REF. NO DSL-P-2060D  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LED LAMP / DSL-2100 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Triangle Reflex Reflector, Double Stop, Double Direction Indicator, End Outline Lamp, Side Marker  
**Operating Voltage:** 10-30V  
**Consumption:** (12/24V) Rev.: 3/3W Fog: 4/4W Tail: 2x 3/4W Stop: 2x 3/4W D.I.: 2x 3/4W S.M.: 0,8/0,8W  
**Type of Protection:** IP67 for modules

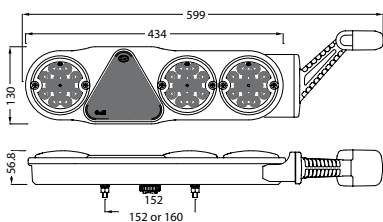



REF. No		REVERSING LAMP	REAR FOG	LED MARKER LAMP	ROUND PLUG (7pin AMP)	PG PLUG (50 cm Cable)
DSL-2100TR	(R)	•				•
DSL-2101TR	(L)		•			•
DSL-2102TR	(R)	•			•	
DSL-2103TR	(L)		•		•	
DSL-2104TR	(R)	•	•		•	
DSL-2105TR	(L)	•	•		•	
DSL-2106TR	(R)	•	•			•
DSL-2107TR	(L)	•	•			•
DSL-2103TR630	(L)		•	•	•	
DSL-2102TR630	(R)	•		•	•	
DSL-2104TR630	(R)	•	•	•	•	
DSL-2105TR630	(L)	•	•	•	•	

NOTES: L: LEFT (side) / R: RIGHT (side) U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LED LAMP / DSL-0500 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Double Stop, Double Direction Indicator, Side Marker  
**Operating Voltage:** 10-30V  
**Consumption:** Fog: 4W Rev: 3W D.I.: 2x2W Tail: 2x1W Stop: 2x2W  
**Type of Protection:** IP67

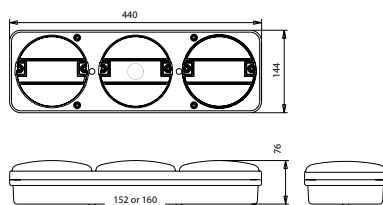



REF. No		REVERSING LAMP	REAR FOG	PG PLUG	ROUND PLUG (AMP On the side)	ALL LED UNITS WITH COLORED LENS	ALL LED UNITS WITH CLEAR LENS
DSL-0500SR	(R)	•		•		•	
DSL-0501SR	(L)		•	•		•	
DSL-0502SR	(R)	•			•	•	
DSL-0503SR	(L)		•		•	•	
DSL-0506SR	(R)	•			ON THE SIDE	•	
DSL-0507SR	(L)		•		ON THE SIDE	•	
DSL-0500SR07	(R)	•		•			•
DSL-0501SR07	(L)		•	•			•
DSL-0502SR07	(R)	•			•		•
DSL-0503SR07	(L)		•		•		•
DSL-0506SR07	(R)	•			ON THE SIDE		•
DSL-0507SR07	(L)		•		ON THE SIDE		•

NOTES: L: LEFT (side) / R: RIGHT (side) DSL-0500 & DSL-0500.07 series, are available in all possible combinations obtained with the use of LED UNITS / U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LED LAMP / DSL-180 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Stop, Direction Indicator, Side Marker, Triangle Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** (12/24V) Reversing: 2,3/2,4W Fog: 2,7/2,7W Stop: 0,6/0,8W Tail: 3,4/3,6W D.I.: 3/3,4W S.M.: 1/1W  
**Type of Protection:** IP67 for modules




REF. No	REVERSING LAMP	REAR FOG	PG PLUG	ROUND PLUG (AMP)
<b>DSL-180WTRSR (R)</b>	●		●	
<b>DSL-181FTRSR (L)</b>		●	●	
<b>DSL-182WTRSR (R)</b>	●			●
<b>DSL-183FTRSR (L)</b>		●		●
<b>DSL-186WTRSR (R)</b>	●			ON THE SIDE
<b>DSL-187FTRSR (L)</b>		●		ON THE SIDE
<b>DSL-180WFTRSR (R)</b>	●	●	●	
<b>DSL-181WFTRSR (L)</b>	●	●	●	
<b>DSL-182WFTRSR (R)</b>	●	●		●
<b>DSL-183WFTRSR (L)</b>	●	●		●
<b>DSL-186WFTRSR (R)</b>	●	●		ON THE SIDE
<b>DSL-187WFTRSR (L)</b>	●	●		ON THE SIDE

NOTES: L: LEFT (side) / R: RIGHT (side) DSL-180TRSR series, is available in all possible combinations obtained with the use of ECO LINE LED LAMPS U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LED LAMP / DSL-2200 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Stop, Double Direction Indicator, Side Marker, Triangle Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** Tail: 2x0,3W Fog: 2W Stop: 2x2W D.I.: 2x1,5W  
**Type of Protection:** IP67  
**Available Housings:** Black, Silver, Red

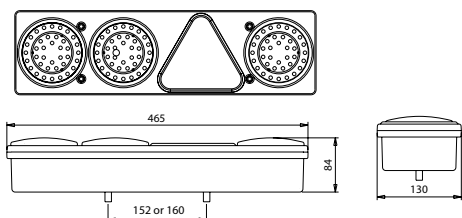

REF. No	REVERSING LAMP	REAR FOG	BLACK FACE	RED FACE	SILVER-METALLIC FACE
<b>DSL-2202SR (R)</b>	●		●		
<b>DSL-2203SR (L)</b>		●	●		
<b>DSL-2202SR06 (R)</b>	●			●	
<b>DSL-2203SR06 (L)</b>		●		●	
<b>DSL-2202SR07 (R)</b>	●				●
<b>DSL-2203SR07 (L)</b>		●			●


NOTES: L: LEFT (side) / R: RIGHT (side) U.K. VERSIONS AVAILABLE FOR ALL TYPES



## 7-FUNCTION REAR FULL LED OR HYBRID LAMP / DSL-2300 SERIES

TECHNICAL SPECIFICATIONS

- Functions:** Reversing, Fog, Stop, Tail, Reflex Reflector, Direction Indicator
- Optional Functions:** End Outline LED Lamp
- Operating Voltage:** 10-30V DC
- Consumption:** Reversing 2.86W, Fog 2.1W, Stop 2.1W, Tail 0.63W, Direction Indicator 1.92W
- Type of Protection:** IP67

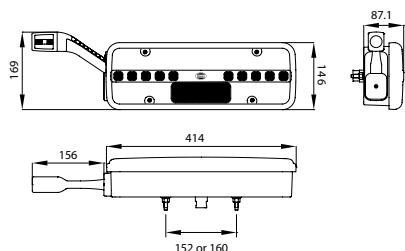


REF. No	FUNCTIONS	LED END OUTLINE LAMP	PG PLUG	AMP
DSL-2300H (R)	Hybrid	●	●	
DSL-2301H (L)	Hybrid	●	●	
DSL-2302H (R)	Hybrid		●	
DSL-2303H (L)	Hybrid		●	
DSL-2304H (R)	Hybrid	●		●
DSL-2305H (L)	Hybrid	●		●
DSL-2306H (R)	Hybrid			●
DSL-2307H (L)	Hybrid			●
DSL-2300 (R)	Full Led	●	●	
DSL-2301 (L)	Full Led	●	●	
DSL-2302 (R)	Full Led		●	
DSL-2303 (L)	Full Led		●	
DSL-2304 (R)	Full Led	●		●
DSL-2305 (L)	Full Led	●		●
DSL-2306 (R)	Full Led			●
DSL-2307 (L)	Full Led			●

NOTES: L: LEFT (side) / R: RIGHT (side)

## 7-FUNCTION REAR HYBRID LAMP / DSL-2300TR SERIES

TECHNICAL SPECIFICATIONS

- Functions:** Reversing, Fog, Stop, Tail, Triangle Reflex Reflector, Direction Indicator
- Optional Functions:** End Outline LED Lamp
- Operating Voltage:** 10-30V DC
- Consumption:** Reversing 2.86W, Fog 2.1W, Stop 2.1W, Tail 0.63W, Direction Indicator 1.92W
- Type of Protection:** IP67

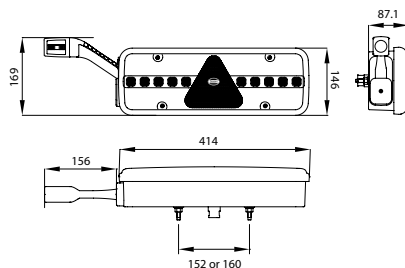

REF. No	FUNCTIONS	LED END OUTLINE LAMP	PG PLUG	AMP
DSL-2300HTR (R)	Hybrid	●	●	
DSL-2301HTR (L)	Hybrid	●	●	
DSL-2302HTR (R)	Hybrid		●	
DSL-2303HTR (L)	Hybrid		●	
DSL-2304HTR (R)	Hybrid	●		●
DSL-2305HTR (L)	Hybrid	●		●
DSL-2306HTR (R)	Hybrid			●
DSL-2307HTR (L)	Hybrid			●
DSL-2300TR (R)	Full Led	●	●	
DSL-2301TR (L)	Full Led	●	●	
DSL-2302TR (R)	Full Led		●	
DSL-2303TR (L)	Full Led		●	
DSL-2304TR (R)	Full Led	●		●
DSL-2305TR (L)	Full Led	●		●
DSL-2306TR (R)	Full Led			●
DSL-2307TR (L)	Full Led			●

NOTES: L: LEFT (side) / R: RIGHT (side)






## 6-FUNCTION REAR LED LAMP / DSL-5000 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic Direction Indicator, Fog, Reversing, Reflex Reflector  
**Operating Voltage:** 10-30 V  
**Consumption:** S: 2W T: 3.2W F: 4W D.I.: 3.5W R: 2.5W  
**Type of Protection:** IP67



>>>>>  
**Dynamic DI**

ECE APPROVED    EMC APPROVED

REF. No	CABLE EXIT	7-PIN AMP	Load Module for Indicator Failure Control
<b>DSL-5000 (R)</b>	●		Add M12 or M24 to REF No M12 for 12V M24 for 24V
<b>DSL-5001 (L)</b>	●		
<b>DSL-5002 (R)</b>		●	
<b>DSL-5003 (L)</b>		●	


NOTES: L: LEFT (side) / R: RIGHT (side)  
 SPARE LENS FOR BOTH LEFT AND RIGHT ITEMS: DSL-P-5000



## 6-FUNCTION REAR LED LAMP / DSL-5000TR SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic Direction Indicator, Fog, Reversing, Triangle Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** S: 2W T: 3.2W F: 4W D.I.: 3.5W R: 2.5W  
**Type of Protection:** IP67



>>>>>  
**Dynamic DI**

ECE APPROVED    EMC APPROVED

REF. No	CABLE EXIT	7-PIN AMP	Load Module for Indicator Failure Control
<b>DSL-5000TR (R)</b>	●		Add M12 or M24 to REF No M12 for 12V M24 for 24V
<b>DSL-5001TR (L)</b>	●		
<b>DSL-5002TR (R)</b>		●	
<b>DSL-5003TR (L)</b>		●	


NOTES: L: LEFT (side) / R: RIGHT (side)  
 SPARE LENS FOR BOTH LEFT AND RIGHT ITEMS: DSL-P-5000TR



## 6-FUNCTION REAR LED LAMP / DSL-5100 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic Direction Indicator, Fog, Reversing, Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** S: 2W T: 2.6W F: 4.8W D.I.: 3.8W R: 2W  
**Type of Protection:** IP67



>>>>>  
**Dynamic DI**

ECE APPROVED    EMC APPROVED

REF. No	CABLE EXIT	7-PIN AMP
<b>DSL-5100 (R)</b>	●	
<b>DSL-5101 (L)</b>	●	
<b>DSL-5102 (R)</b>		●
<b>DSL-5103 (L)</b>		●

NOTES: L: LEFT (side) / R: RIGHT (side)  
 SPARE LENS FOR BOTH LEFT AND RIGHT ITEMS: DSL-P-5100

NEW


## 6-FUNCTION REAR LED LAMP / DSL-4200RR SERIES



### TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic D.I. (optional), Fog, Reversing, Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** S: 1.5W T: 2W D.I.: 1.5W F: 4W R: 1.5W  
**Type of Protection:** IP67

>>>>>  
**Dynamic DI**



REF. No	PG PLUG	ROUND PLUG (AMP)	DYNAMIC D.I.	Load Module for Indicator Failure Control
DSL-4202RR (R)	●			Add M12 or M24 to REF No M12 for 12V M24 for 24V
DSL-4203RR (L)	●			
DSL-4204RR (R)		●		
DSL-4205RR (L)		●		
DSL-D4202RR (R)	●		●	
DSL-D4203RR (L)	●		●	
DSL-D4204RR (R)		●	●	
DSL-D4205RR (L)		●	●	

NOTES: L: LEFT (side) / R: RIGHT (side)  
 SPARE LENS FOR BOTH LEFT AND RIGHT ITEMS: DSL-P-4200D

ECE APPROVED


## 6-FUNCTION REAR LED LAMP / DSL-4200 SERIES



### TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic D.I. (optional), Fog, Reversing, Triangular Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** S: 1.5W T: 2W D.I.: 1.5W F: 4W R: 1.5W  
**Type of Protection:** IP67

>>>>>  
**Dynamic DI**



REF. No	PG PLUG	ROUND PLUG (AMP)	DYNAMIC D.I.	Load Module for Indicator Failure Control
DSL-4202 (R)	●			Add M12 or M24 to REF No M12 for 12V M24 for 24V
DSL-4203 (L)	●			
DSL-4204 (R)		●		
DSL-4205 (L)		●		
DSL-D4202 (R)	●		●	
DSL-D4203 (L)	●		●	
DSL-D4204 (R)		●	●	
DSL-D4205 (L)		●	●	


NOTES: L: LEFT (side) / R: RIGHT (side)  
 SPARE LENS FOR BOTH LEFT AND RIGHT ITEMS: DSL-P-4200

ECE APPROVED

### 4-FUNCTION REAR LED LAMP



REF. No  
**DSL-4010** For surface mounting



ECE APPROVED


TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator, Reflex Reflector  
**Operating Voltage:** 9-33V  
**Consumption:** Stop: 1,5W Tail: 0,5W D.I.: 1,5W  
**Type of protection:** IP67

### 4-FUNCTION REAR LED LAMP



REF. No  
**DSL-4020** Right  
**DSL-4021** Left




TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Tail, Stop, D. I., Reflex Reflector  
**Operating Voltage:** 9-33V DC  
**Consumption:** D.I.: 2W, Stop: 3W, Rev: 2W, Tail: 0,5W  
**Type of protection:** IP67

### 3-FUNCTION REAR LED LAMP



REF. No  
**DSL-4010FR** For surface mounting





ECE APPROVED

TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reverse, Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** Rev. 1,7W, Fog 2,9W  
**Type of protection:** IP67

### 4-FUNCTION REAR LED LAMP



REF. No  
**DSL-4100** Basic Version  
**DSL-4100PL** With Number Plate Lamp



ECE APPROVED

TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator, Reflex Reflector  
**Optional functions:** Number plate lamp  
**Operating Voltage:** 9-33V DC  
**Consumption:** Stop: 0,6/1,2W Tail: 0,5/0,75W D.I.: 0,75/1,5W  
 NPL: 0,5/0,75W  
**Type of protection:** IP67

NEW

### 3-FUNCTION REAR LED LAMP / DSL-240 SERIES



REF. No  
**DSL-240FRT-L** For surface mounting (LEFT)  
**DSL-240FRT-R** For surface mounting (RIGHT)



TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reversing, Tail  
**Operating Voltage:** 10-30V DC  
**Consumption:** F: 4.3W R: 2W T: 1.7W  
**Type of Protection:** IP67

ECE APPROVED

NEW

### 3-FUNCTION REAR LED LAMP / DSL-240 SERIES



REF. No  
**DSL-240STD-L** For surface mounting (LEFT)  
**DSL-240STD-R** For surface mounting (RIGHT)



TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic D.I.  
**Operating Voltage:** 10-30V DC  
**Consumption:** S: 3W T: 1.7W D.I.: 3.8W  
**Type of Protection:** IP67

>>>>>  
**Dynamic DI**

ECE APPROVED

### 3-FUNCTION REAR LED LAMP / DSL-230 SERIES





REF. No  
**DSL-230FRT** For surface mounting

TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reversing, Tail  
**Operating Voltage:** 10-30V DC  
**Consumption:** T:1.2W F:4W R:1.5W  
**Type of Protection:** IP67

ECE APPROVED

### 3-FUNCTION REAR LED LAMP / DSL-230 SERIES



REF. No  
**DSL-230STD** For surface mounting

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Dynamic D.I. (optional)  
**Operating Voltage:** 10-30V DC  
**Consumption:** T: 1.2W S: 1.2W D.I.: 1W  
**Type of Protection:** IP67



>>>>>  
**Dynamic DI**

ECE APPROVED

REF. No	DYNAMIC D.I.
<b>DSL-230STD</b>	
<b>DSL-D230STDR (R)</b>	●
<b>DSL-D230STDL (L)</b>	●

NOTES: L: LEFT (side) / R: RIGHT (side)

## 2-FUNCTION REAR LED LAMP / DSL-220 SERIES





REF. No  
**DSL-220FR** For surface mounting

TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reversing  
**Operating Voltage:** 10-30V DC  
**Consumption:** F: 3W R: 2W  
**Type of Protection:** IP67

ECE APPROVED EMC APPROVED

## 3-FUNCTION REAR LED LAMP / DSL-220 SERIES





REF. No  
**DSL-220STD** For surface mounting

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, D.I.  
**Operating Voltage:** 10-30V DC  
**Consumption:** T:0.3W S:1W D.I.:1W  
**Type of Protection:** IP67

ECE APPROVED

## 4-FUNCTION REAR LED LAMP





REF. No  
**D-002STD**

TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Triangle Reflex Reflector, Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** (12/24V) Stop: 2/2,7W Tail: 0,75/1,2W D.I.: 1,8/2,4W  
**Type of protection:** IP67

ECE APPROVED

## 2-FUNCTION REAR LED LAMP





REF. No  
**D-002FR**

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog  
**Operating Voltage:** 9-33V DC  
**Consumption:** (12/24V) Fog: 2/2,5W Rev.: 0,9/1W  
**Type of protection:** IP67

ECE APPROVED

### 3-FUNCTION REAR LED LAMP



ECE APPROVED

EMC APPROVED

REF. No

**DSL-8080/18**

Red - Amber lens

**DSL-8080/18.07**

Clear lens

TECHNICAL SPECIFICATIONS



**Functions:** Tail, Stop, Direction Indicator

**Operating Voltage:** 9-33V

**Consumption:** Tail: 1W, Stop: 2W, D.I.: 2W

**Type of protection:** IP67

### 3-FUNCTION REAR LED LAMP / DSL-182 SERIES



ECE APPROVED

REF. No

**DSL-182AR**

Red - Amber lens

TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator



**Operating Voltage:** 9-33V

**Consumption:** (12/24V) Stop: 0,3/0,4W Tail: 1,7/1,8W

D.I.: 1,5/1,7W

**Type of protection:** IP67

### 2-FUNCTION REAR LED LAMP / DSL-182 SERIES



ECE APPROVED

REF. No

**DSL-182FR**

With housing

TECHNICAL SPECIFICATIONS



**Functions:** Fog, Reverse

**Operating Voltage:** 9 - 33V DC

**Consumption:** Fog 3W, Rev 2,3W

**Type of protection:** IP67

### 2-FUNCTION REAR LED LAMP / DSL-182 SERIES



ECE APPROVED

REF. No

**DSL-182FRB**

With slim fixed base and fitting screws

TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reverse

**Operating Voltage:** 9 - 33V DC

**Consumption:** Fog 3W, Rev 2,3W

**Type of protection:** IP67

### 4-FUNCTION REAR LED LAMP



TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator

**Operating Voltage:** 9-33V

**Consumption:** Stop:3W Tail: 2W D.I.: 2W

**Type of Protection:** IP67



ECE APPROVED



PG PLUG



ROUND PLUG (AMP)

REF. No	PG PLUG	ROUND PLUG (AMP)
<b>DSL-210STD RR (R)</b>	•	
<b>DSL-211STD RR (L)</b>	•	
<b>DSL-212STD RR (R)</b>		•
<b>DSL-210STD RV (R) vertical mounting</b>	•	
<b>DSL-211STD RV (L) vertical mounting</b>	•	
<b>DSL-213STD RR (L)</b>		•
<b>DSL-212STD RV (R) vertical mounting</b>		•
<b>DSL-213STD RV (L) vertical mounting</b>		•

NOTES: L: LEFT (side) / R: RIGHT (side)  
U.K. VERSIONS AVAILABLE FOR ALL TYPES



## 2-FUNCTION REAR LED LAMP





REF. No  
**DSL-31022R**

TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop  
**Operating Voltage:** 9-33V  
**Consumption:** Stop: 0,5W Tail: 3W  
**Type of protection:** IP67

ECE APPROVED

## 3-FUNCTION REAR LED LAMP




REF. No  
**DSL-210STDLB** With Base / Pg Plug / 1M Cable

TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** (12/24V) Stop: 3/4W Tail: 1/1W D.I.: 3/4W  
**Type of protection:** IP67

ECE APPROVED

## 3-FUNCTION REAR LED LAMP



REF. No  
**DSL-210STDL** For surface mounting


TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop, Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** (12/24V) Stop: 3/4W Tail: 1/1W D.I.: 3/4W  
**Type of protection:** IP67

ECE APPROVED

EMC APPROVED

## 2-FUNCTION REAR LED LAMP




REF. No  
**DSL-210FR** For surface mounting

TECHNICAL SPECIFICATIONS

**Functions:** Fog, Reverse  
**Operating Voltage:** 9 - 33V DC  
**Consumption:** Fog 2,6W, Rev 1W  
**Type of protection:** IP67

ECE APPROVED

### 2-FUNCTION REAR LED LAMP



REF. No  
**DSL-210STL** For surface mounting



TECHNICAL SPECIFICATIONS

**Functions:** Tail, Stop  
**Operating Voltage:** 9-33V DC  
**Consumption:** Stop: 3W Tail: 1W  
**Type of protection:** IP67

ECE APPROVED

SAE DOT APPROVED

### 3-FUNCTION REAR LED LAMP



REF. No  
**DSL-22/12** 12 Volt  
**DSL-22/24** 24 Volt



REF. No  
**DSL-22N/12** 12 volt, without inner amber lens  
**DSL-22N/24** 24 volt, without inner amber lens

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12/24) Tail: 0,3/0,3W Stop: 2/2W D.I.: 1,5/1,5W  
**Type of protection:** IP67

ECE APPROVED

### 2-FUNCTION REAR LED LAMP





REF. No  
**DSL0400STL**

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail  
**Operating Voltage:** 9-33V DC  
**Consumption:** Stop: 2W Tail: 1W  
**Type of protection:** IP67

ECE APPROVED

### 2-FUNCTION REAR LED LAMP





REF. No  
**DSL400STL**

TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail  
**Operating Voltage:** 9-33V DC  
**Consumption:** (12/24V) Stop: 2/2W Tail: 1/1W  
**Type of protection:** IP67

ECE APPROVED

### 1-FUNCTION REAR LED



REF. No  
**DSL-3090**

TECHNICAL SPECIFICATIONS



**Functions:** Tail  
**Operating Voltage:** 9-33V DC  
**Consumption:** Tail: 0,8W  
**Type of protection:** IP67



## 7-FUNCTION REAR LAMP / 2030 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp  
**Optional Functions:** Number Plate Lamp, Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC

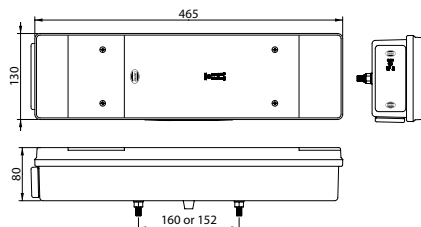

ECE APPROVED

REF. No	SIDE MARKER LAMP (SR)	NUMBER PLATE (PL)	CABLE EXIT	ROUND PLUG (Schlemmer)	SQUARE PLUG (Volvo Plug)	PG PLUG	ROUND PLUG (AMP) for MAN - T-GA	IVECO CONNECTOR	BULBS
<b>R-2030</b> <b>L-2031</b>			•						4x21W 3x5W
<b>L-2031PL</b>		•	•						4x21W 4x5W
<b>R-2030SR</b> <b>L-2031SR</b>	•		•						4x21W 3x5W
<b>L-2031PLSR</b>	•	•	•						4x21W 4x5W
<b>R-2032</b> <b>L-2033</b>				•					4x21W 3x5W
<b>L-2033PL</b>		•		•					4x21W 4x5W
<b>R-2032SR</b> <b>L-2033SR</b>	For MAN •			•					4x21W 3x5W
<b>L-2033PLSR</b>	For MAN •	•		•					4x21W 4x5W
<b>R-2034</b> <b>L-2035</b>					•				4x21W 3x5W
<b>L-2035PL</b>		•			•				4x21W 4x5W
<b>R-2034SR</b> <b>L-2035SR</b>	For VOLVO •				•				4x21W 3x5W
<b>L-2035PLSR</b>	For VOLVO •	•			•				4x21W 4x5W
<b>R-2030.2</b> <b>L-2031.2</b>						•			4x21W 3x5W
<b>L-2031.2PL</b>		•				•			4x21W 4x5W
<b>R-2030.2SR</b> <b>L-2031.2SR</b>	•					•			4x21W 3x5W
<b>L-2031.2PLSR</b>	•	•				•			4x21W 4x5W
<b>R-2036SR</b> <b>L-2037SR</b>	For MAN-TG-A •						ON THE SIDE		4x21W 3x5W
<b>L-2037PLSR</b>	For MAN-TG-A •	•					ON THE SIDE		4x21W 4x5W
<b>R-2038SR</b>	For IVECO •							•	4x21W 3x5W
<b>L-2039PLSR</b>	For IVECO •	•						•	4x21W 4x5W

NOTES: L: LEFT (side) / R: RIGHT (side)

SPARE LENS AVAILABLE REF. NO P-2030 / U.K. VERSIONS AVAILABLE FOR ALL TYPES


## 7-FUNCTION REAR LAMP / 2040 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp  
End Outline LED Lamp

**Optional Functions:** Number Plate Lamp, Side Marker Lamp

**Operating Voltage:** 12V or 24V DC

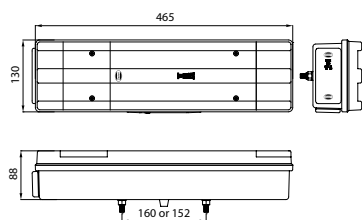

CABLE EXIT PG PLUG ROUND PLUG (Schlemmer)


REF. No		SIDE MARKER LAMP (SR)	NUMBER PLATE (PL)	CABLE EXIT	ROUND PLUG (Schlemmer)	PG PLUG	BULBS
<b>R-2040</b> <b>L-2041</b>				•			4x21W 3x5W
<b>L-2041PL</b>			•	•			4x21W 4x5W
<b>R-2040SR</b> <b>L-2041SR</b>	For MB-SPRINTER	•		•			4x21W 3x5W
<b>L-2041PLSR</b>	For MB-SPRINTER	•	•	•			4x21W 4x5W
<b>R-2042</b> <b>L-2043</b>	For MB-SPRINTER				•		4x21W 3x5W
<b>L-2043PL</b>			•		•		4x21W 4x5W
<b>R-2042SR</b> <b>L-2043SR</b>	For MB-ATEGO	•			•		4x21W 3x5W
<b>L-2043PLSR</b>	For MB-ATEGO	•	•		•		4x21W 4x5W
<b>R-2040.2</b> <b>L-2041.2</b>						•	4x21W 3x5W
<b>L-2041.2PL</b>			•			•	4x21W 4x5W
<b>R-2040.2SR</b> <b>L-2041.2SR</b>		•				•	4x21W 3x5W
<b>L-2041.2PLSR</b>		•	•			•	4x21W 4x5W

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO P-2040 / U.K. VERSIONS AVAILABLE FOR ALL TYPES


## 7-FUNCTION REAR LAMP / 2050 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp  
**Optional Functions:** Number Plate Lamp, Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC





ECE APPROVED



REF. No		SIDE MARKER LAMP (SR)	NUMBER PLATE (PL)	CABLE EXIT	ROUND PLUG (Schlemmer)	ROUND PLUG (AMP ON THE SIDE)	PG PLUG	BULBS
<b>R-2050</b> <b>L-2051</b>				BACKSIDE CENTER				4x21W 3x5W
<b>L-2051PL</b>			•	BACKSIDE CENTER				4x21W 4x5W
<b>R-2050SR</b> <b>L-2051SR</b>		•		BACKSIDE CENTER				4x21W 3x5W
<b>L-2051PLSR</b>		•	•	BACKSIDE CENTER				4x21W 4x5W
<b>R-2052</b> <b>L-2053</b>					BACKSIDE CENTER			4x21W 3x5W
<b>L-2053PL</b>			•		BACKSIDE CENTER			4x21W 4x5W
<b>R-2052SR</b> <b>L-2053SR</b>		•			BACKSIDE CENTER			4x21W 3x5W
<b>L-2053PLSR</b>		•	•		BACKSIDE CENTER			4x21W 4x5W
<b>R-2054SR</b> <b>L-2055SR</b>	For VOLVO	•						4x21W 3x5W
<b>L-2055PLSR</b>	For VOLVO	•	•					4x21W 4x5W
<b>R-2054SR.S</b> <b>L-2055SR.S</b>	For SCANIA	•						4x21W 3x5W
<b>R-2054SR162</b>	For SCANIA R	•						4x21W 3x5W
<b>L-2055SR163</b>	For SCANIA R	•						4x21W 4x5W
<b>L-2055PLSR.S</b>	For SCANIA R	•	•					4x21W 4x5W
<b>L-2055PLSR163</b>	For SCANIA R	•	•					4x21W 4x5W
<b>R-2050.2</b> <b>L-2051.2</b>							•	4x21W 3x5W
<b>L-2051.2PL</b>			•				•	4x21W 4x5W
<b>R-2050.2SR</b> <b>L-2051.2SR</b>		•					•	4x21W 3x5W
<b>L-2051.2PLSR</b>		•	•				•	4x21W 4x5W
<b>R-2050SR.S</b> <b>L-2051SR.S</b>	For SCANIA	•		BOTTOM SIDE				4x21W 3x5W
<b>L-2051PLSR.S</b>	For SCANIA	•	•	BOTTOM SIDE				4x21W 4x5W

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO P-2050 / U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LAMP / 2060 SERIES



ECE APPROVED

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Reflex Reflector, Stop, Direction Indicator  
**Optional Functions:** Number Plate Lamp  
**Operating Voltage:** 12V or 24V DC



REF. No	NUMBER PLATE (PL)	CABLE EXIT	ROUND PLUG (AMP)	PG PLUG WITH 1m DUAL CABLE	BULBS
<b>R-2060</b> <b>L-2061</b>		•			4x21W 2x10W
<b>L-2061PL</b>	•	•			4x21W 2x10W
<b>R-2062</b> <b>L-2063</b>			•		4x21W 2x10W
<b>L-2063PL</b>	•		•		4x21W 2x10W
<b>R-2064</b> <b>L-2065</b>			•	•	4x21W 2x10W
<b>L-2065PL</b>	•		•	•	4x21W 2x10W

ADD **N** AT THE END OF REFERENCE NUMBER FOR VERSION WITHOUT REFLEX REFLECTOR

NOTES: L: LEFT (side) / R: RIGHT (side)  
 \* NOT AVAILABLE FOR GERMAN MARKET

SPARE LENS AVAILABLE REF. NO P-2060  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LAMP / 2060D SERIES



ECE APPROVED

### TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Reversing, Fog, D.I., Reflex Reflector  
**Optional Functions:** Number Plate Lamp  
**Operating Voltage:** 12V or 24V DC


REF. No	NUMBER PLATE (PL)	CABLE EXIT	ROUND PLUG (AMP)	PG PLUG WITH 1m DUAL CABLE	BULBS
<b>R-2060D</b> <b>L-2061D</b>		•			4x21W 2x10W
<b>L-2061DPL</b>	•	•			4x21W 2x10W
<b>R-2062D</b> <b>L-2063D</b>			•		4x21W 2x10W
<b>L-2063DPL</b>	•		•		4x21W 2x10W
<b>R-2064D</b> <b>L-2065D</b>			•	•	4x21W 2x10W
<b>L-2065DPL</b>	•		•	•	4x21W 2x10W

ADD **N** AT THE END OF REFERENCE NUMBER FOR VERSION WITHOUT REFLEX REFLECTOR

NOTES: L: LEFT (side) / R: RIGHT (side)  
 \* NOT AVAILABLE FOR GERMAN MARKET

SPARE LENS AVAILABLE REF. NO P-2060D  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 6-FUNCTION REAR LAMP / 2070 SERIES



REF. No  
**R-2070** Right  
**L-2071** Left  
**P-2070** Spare Lens

### TECHNICAL SPECIFICATIONS


**Functions:** Fog, Double Tail, Reflex Reflector, Stop, Direction Indicator, Reversing  
**Operating Voltage:** 12V or 24V DC  
**Consumption:** 4x21W / 2x5W

ECE APPROVED U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LAMP / 2076 SERIES



REF. No  
**R-2076SR** Right  
**L-2077SR** Left  
**P-2076** Spare Lens



### TECHNICAL SPECIFICATIONS



**Functions:** Reversing, Fog, Double Tail, Reflex Reflector, Stop, Direction Indicator, End Outline, Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC  
**Consumption:** 4x21W / 3x5W

ECE APPROVED U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 5-FUNCTION REAR LAMP / 2080 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Stop, Direction Indicator  
**Optional Functions:** Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC



ECE APPROVED


REF. No	CABLE EXIT	ROUND PLUG (AMP)	6 PIN CONNECTOR ON THE HOUSING	BULBS
<b>R-2080</b> <b>L-2081</b>	●			4x21W 2x5W
<b>R-2082</b> <b>L-2083</b>		●		4x21W 2x5W
<b>R-2086</b> <b>L-2087</b>			●	4x21W 2x5W
<b>R-2086SR</b> <b>L-2087SR</b>			●	4x21W 2x5W

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO P-2080 U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LAMP / 2090 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Triangle Reflex Reflector, Stop, Direction Indicator, End Outline Lamp, Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC



ECE APPROVED




REF. No	CABLE EXIT	PG PLUG	ROUND PLUG (AMP)	7 PIN EXTERNAL CONNECTION	BULBS
<b>R-2090SR</b>	●				1x21/5W 4X21W 3X5W
<b>L-2091SR</b>	●				1x21/5W 4X21W 4X5W
<b>R-2090.2SR</b>		●			1x21/5W 4X21W 3X5W
<b>L-2091.2SR</b>		●			1x21/5W 4X21W 4X5W
<b>R-2090.2SRC3</b>		With 3m cable			1x21/5W 4X21W 3X5W
<b>L-2091.2SRC3</b>		With 3m cable			1x21/5W 4X21W 4X5W
<b>R-2092SR</b>			●		1x21/5W 4X21W 3X5W
<b>L-2093SR</b>			●		1x21/5W 4X21W 4X5W
<b>R-2094SR</b>				●	1x21/5W 4X21W 3X5W
<b>L-2095SR</b>				●	1x21/5W 4X21W 4X5W

NOTES: L: LEFT (side) / R: RIGHT (side) SPARE LENS AVAILABLE REF. NO P-2090SR (Right), REF. NO P-2091SR (Left) / U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 7-FUNCTION REAR LAMP / 2100 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator, End Outline Lamp  
**Optional Functions:** Number Plate Lamp, Side Marker Lamp  
**Operating Voltage:** 12V or 24V DC



ECE APPROVED

REF. No		SIDE MARKER LAMP (SR)	NUMBER PLATE (PL)	CABLE EXIT	PG PLUG	ROUND PLUG (AMP) ON THE SIDE	6 PIN EXTERNAL CONNENCTOR WITH 1,5m CABLE	BULBS
<b>R-2100</b> <b>L-2101</b>				•				4x21W 2x10W
<b>L-2101PL</b>			•	•				4x21W 3x10W
<b>R-2100SR</b> <b>L-2101SR</b>		•		•				4x21W 2x10W
<b>L-2101PLSR</b>		•	•	•				4x21W 3x10W
<b>R-2100.2</b> <b>L-2101.2</b>					•			4x21W 2x10W
<b>L-2101.2PL</b>			•		•			4x21W 3x10W
<b>R-2100.2SR</b> <b>L-2101.2SR</b>		•			•			4x21W 2x10W
<b>L-2101.2PLSR</b>		•	•		•			4x21W 3x10W
<b>R-2102</b> <b>L-2103</b>						•		4x21W 2x10W
<b>L-2103PL</b>			•			•		4x21W 3x10W
<b>R-2102SR</b> <b>L-2103SR</b>	For MB-ACTROS	•				•		4x21W 2x10W
<b>L-2103PLSR</b>	For MB-ACTROS	•	•			•		4x21W 3x10W
<b>R-2106SR</b>	For NEW MB-ACTROS	•				6 PIN		4x21W 3x10W
<b>L-2107PLSR</b>	For NEW MB-ACTROS	•	•			7 PIN		4x21W 2x10W
<b>R-2104SR</b>	For MB-SK	•					•	4x21W 2x10W
<b>L-2105SR</b>	For MB-SK	•					•	4x21W 2x10W
<b>L-2105PLSR</b>	For MB-SK	•	•				•	4x21W 3x10W


NOTES: L: LEFT (side) / R: RIGHT (side)

SPARE LENS AVAILABLE REF. NO P-2100R (Right) REF. NO P-2100L (Left)  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES


## 6-FUNCTION REAR LAMP / 2110 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Double Tail, Reflex Reflector or Triangle Reflex Reflector, Stop, Direction Indicator  
**Optional Functions:** LED Side Marker Lamp (620)  
**Operating Voltage:** 12V or 24V DC

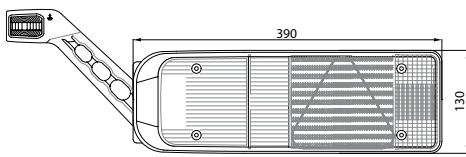

ROUND PLUG (AMP)




ECE APPROVED

REF. No	REFLEX REFLECTOR	TRIANGLE REFLEX REFLECTOR	STOP	FLASHER	SIDE MARKER LED LAMP	MARKER LAMP WITH RUBBER BASE	ROUND PLUG (AMP)	BULBS
R-2112	•		•	•			•	3x21W 1xPY21W 2x5W
L-2113	•		•	•			•	3x21W 1xPY21W 2x5W
R-2112SR	•		•	•	•		•	3x21W 1xPY21W 2x5W
L-2113SR	•		•	•	•		•	3x21W 1xPY21W 2x5W
R-2112TRSR		•	•	•	•		•	3x21W 1xPY21W 2x5W
L-2113TRSR		•	•	•	•		•	3x21W 1xPY21W 2x5W
R-2112TR		•	•	•			•	3x21W 1xPY21W 2x5W
L-2113TR		•	•	•			•	3x21W 1xPY21W 2x5W
R-2112TR620		•	•	•		•	•	3x21W 1xPY21W 2x5W
L-2113TR620		•	•	•		•	•	3x21W 1xPY21W 2x5W

NOTES: L: LEFT (side) / R: RIGHT (side)

SPARE LENS AVAILABLE REF. NO P-2110, P-2110TR, P-2111TR  
 U.K. VERSIONS AVAILABLE FOR ALL TYPES

### 5-FUNCTION REAR LAMP / 2000 SERIES




ECE APPROVED

REF. No			
<b>R-2000</b>	Right	<b>P-2000</b>	Spare Lens
<b>L-2001</b>	Left		
<b>L-2001PL</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Reversing, Fog, Tail, Stop, Direction Indicator	<b>Operating Voltage:</b>	12 or 24V DC
<b>Optional:</b>	Number Plate Lamp	<b>Consumption:</b>	2x10W 4x21W

### 6-FUNCTION REAR LAMP




ECE APPROVED

REF. No			
<b>R-2000.110</b>	Right	<b>P-2000.110</b>	Spare Lens
<b>L-2001.110</b>	Left		
<b>L-2001.110PL</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator	<b>Operating Voltage:</b>	12 or 24V DC
<b>Optional:</b>	Number Plate Lamp	<b>Consumption:</b>	2x10W 4x21W

### 3-FUNCTION REAR LAMP




ECE APPROVED

REF. No			
<b>R-2010</b>	Right	<b>P-2010</b>	Spare Lens
<b>L-2011</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Stop, Tail, Direction Indicator, Number Plate Lamp	<b>Operating Voltage:</b>	12 or 24V DC
		<b>Consumption:</b>	2x5W 2x21W

### 4-FUNCTION REAR LAMP




ECE APPROVED

REF. No			
<b>R-2012</b>	Right	<b>P-2012</b>	Spare Lens
<b>L-2013</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Reversing, Stop, Tail, Direction Indicator, Number Plate Lamp	<b>Operating Voltage:</b>	12 or 24V DC
		<b>Consumption:</b>	2x5W 4x21W

### 5-FUNCTION REAR LAMP



ECE APPROVED

REF. No			
<b>R-2021R</b>	Right with Reverse	<b>P-2021R</b>	Spare lens Right
<b>L-2020F</b>	Left with fog	<b>P-2020F</b>	Spare Lens Left
<b>L-2020FPL</b>	Left with NPL		

TECHNICAL SPECIFICATIONS




<b>Functions:</b>	Reversing (Right), Fog (Left), Stop, Tail, Direction Indicator, Reflex Reflector	<b>Operating Voltage:</b>	12 or 24V DC
		<b>Consumption:</b>	1x10W 3x21W



## 6-FUNCTION REAR LAMP / 4200 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Stop, Tail, Triangle Reflex Reflector, Direction Indicator  
**Optional Functions:** Number Plate Lamp  
**Operating Voltage:** 12 or 24V DC



ECE APPROVED




REF. No	NUMBER PLATE	CABLE EXIT	PG PLUG	ROUND PLUG (AMP)	BULBS
<b>R-4200</b>		●			1x21/5W 3x21W
<b>L-4201</b>		●			1x21/5W 3x21W
<b>L-4201PL</b>	●	●			1x21/5W 3x21W 1x4W
<b>R-4202</b>			●		1x21/5W 3x21W
<b>L-4203</b>			●		1x21/5W 3x21W
<b>L-4203PL</b>	●		●		1x21/5W 3x21W 1x4W
<b>R-4204</b>				●	1x21/5W 3x21W
<b>L-4205</b>				●	1x21/5W 3x21W
<b>L-4205PL</b>	●			●	1x21/5W 3x21W 1x4W

NOTES: L: LEFT (side) / R: RIGHT (side) / SPARE LENS AVAILABLE REF. NO P-4200 (Right) / REF. NO P-4201 (Left) U.K. VERSIONS AVAILABLE FOR ALL TYPES

## 5-FUNCTION REAR LAMP / 4300 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Reversing (Right), Fog (Left), Tail, Reflex Reflector, Stop, Direction Indicator  
**Operating Voltage:** 12 or 24V DC



ECE APPROVED

REF. No	REVERSING LAMP	REAR FOG	CABLE EXIT	ROUND PLUG (AMP)	5 PIN EXTERNAL CONNECTOR	BULBS
<b>R-4300</b>	●		●			3x21W 2x5W
<b>L-4301</b>		●	●			3x21W 2x5W
<b>R-4302</b>	●			●		3x21W 2x5W
<b>L-4303</b>		●		●		3x21W 2x5W
<b>R-4306</b>	●				●	3x21W 2x5W
<b>L-4307</b>		●			●	3x21W 2x5W

NOTES: L: LEFT (side) / R: RIGHT (side)


SPARE LENS AVAILABLE REF. NO P-4300 / REF. NO P-4301 U.K. VERSIONS AVAILABLE FOR ALL TYPES

### 6-FUNCTION REAR LAMP / 4350 SERIES



TECHNICAL SPECIFICATIONS

**Functions:** Reversing, Fog, Tail, Reflex Reflector, Stop, Direction Indicator  
**Operating Voltage:** 12 or 24V DC

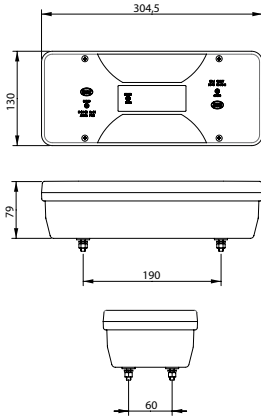

REF. No	CABLE EXIT	ROUND PLUG (AMP)	5 PIN EXTERNAL CONNECTOR	BULBS
<b>R-4350</b>	●			2xP21W 1xP21/5W 1xPY21W
<b>L-4351</b>	●			2xP21W 1xP21/5W 1xPY21W
<b>R-4352</b>		●		2xP21W 1xP21/5W 1xPY21W
<b>L-4353</b>		●		2xP21W 1xP21/5W 1xPY21W
<b>R-4356</b>			●	2xP21W 1xP21/5W 1xPY21W
<b>L-4357</b>			●	2xP21W 1xP21/5W 1xPY21W

NOTES: L: LEFT (side) / R: RIGHT (side)


SPARE LENS AVAILABLE REF. NO P-4350

ECE APPROVED

### 3-FUNCTION REAR LAMP



REF. No  
**8060/5** Left with NPL  
**8060/6** Right  
**P-8060-5** Spare Lens



TECHNICAL SPECIFICATIONS


**Functions:** Stop, Tail, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x10W / 2x21W

ECE APPROVED

### 3-FUNCTION REAR LAMP



REF. No  
**8060/1** Left with NPL  
**8060/2** Right  
**P-8060-1** Spare Lens




TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x10W / 2x21W  
**Type of protection:** IP67

ECE APPROVED

### 3-FUNCTION REAR LAMP



REF. No			
<b>8060/3L</b>	Left with NPL	<b>P-8060-4L</b>	Spare Lens Left
<b>8060/4L</b>	Left	<b>P-8060-4R</b>	Spare Lens Right
<b>8060/4R</b>	Right		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Stop, Tail, Direction Indicator	<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>		<b>Consumption:</b>	1x10W 2x21W

### 3-FUNCTION REAR LAMP



REF. No			
<b>8060/8LR</b>	Left / Right	<b>P-8060-8</b>	Spare Lens
<b>8060/8PL</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Stop, Tail, Direction Indicator	<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>		<b>Consumption:</b>	1x10W 2x21W

### 4-FUNCTION REAR LAMP



REF. No			
<b>8060/9LR</b>	Left / Right	<b>P-8060-9</b>	Spare Lens
<b>8060/9PL</b>	Left with NPL		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Reversing, Stop, Tail, Direction Indicator	<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>		<b>Consumption:</b>	1x10W 3x21W

### 4-FUNCTION REAR LAMP




REF. No			
<b>4100</b>	Rear Mounting with NPL		
<b>P-4100</b>	Spare Lens		

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Stop, Tail, Direction Indicator, Number Plate Lamp	<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>		<b>Consumption:</b>	2x21W 1x5W

### 4-FUNCTION REAR LAMP

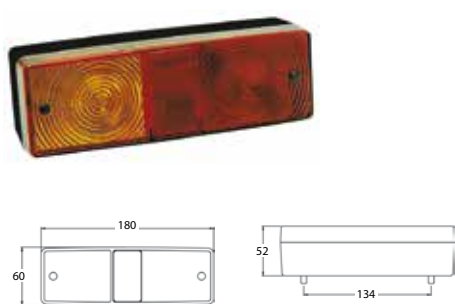


REF. No			
<b>4000</b>	Rear Mounting	<b>P-4000</b>	Spare Lens

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Reversing, Stop, Tail, Direction Indicator Number Plate Lamp	<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>		<b>Consumption:</b>	1x21W 1x21/5W

### 3-FUNCTION REAR LAMP




REF. No  
**8080/17** With NPL  
**8080/18** Without NPL  
**P-8080-18** Spare Lens

TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x21W  
 1x5W

ECE APPROVED

### 3-FUNCTION REAR LAMP




REF. No  
**8080/15** With NPL  
**8080/16** Without NPL  
**P-8080-16** Spare Lens

TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x21W  
 1x5W

### 3-FUNCTION REAR LAMP




REF. No  
**8080/12** With Protective Cap  
**P-8080-12** Spare Lens

TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x18W  
 1x5W

### 3-FUNCTION REAR LAMP




REF. No  
**8080/14** Without Protective Cap  
**P-8080-12** Spare Lens

TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x18W  
 1x5W

### 1-FUNCTION REAR LAMP



REF. No  
**1070-M122** Rear Mounting

TECHNICAL SPECIFICATIONS  
**Functions:** Tail


**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

ECE APPROVED

### 3-FUNCTION REAR LAMP



REF. No  
**145/52.065** Rear Mounting



TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail,  
Direction Indicator


**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W/5W  
1x21W

ECE APPROVED

### 5-FUNCTION REAR LAMP



REF. No  
**140/52** Rear Mounting

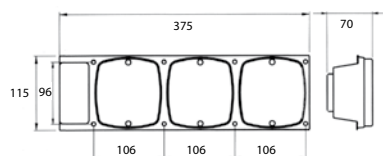

TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail, D. I.,  
Reversing,  
Reflex Reflector


**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W/5W  
2x21W

ECE APPROVED

### 3-FUNCTION REAR LAMP



REF. No  
**8060/45** With Black Rim  
**8060/45N** With Chrome-type Rim  
**P-8060-45** Spare Lens




TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail,  
Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x15W  
1x5W

### 3-FUNCTION REAR LAMP



REF. No  
**8080/20** With Red Base  
**P-8080-20** Spare Lens




TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail,  
Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x18W  
1x5W

### 3-FUNCTION REAR LAMP




REF. No  
**8080/19** Rear Mounting  
**P-8080-20** Spare Lens



TECHNICAL SPECIFICATIONS  
**Functions:** Stop, Tail,  
Direction Indicator

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W  
1x21W/5W

### 3-FUNCTION REAR LAMP



REF. No

**8080/7T**

Rear Mounting

**P-8080-7O**

Spare Lens


TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x21W, 1x21/5W

### 3-FUNCTION REAR LAMP



REF. No

**8080/7OL**

Left

**8080/7OR**

Right

**P-8080-7O**

Spare Lens


TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x21W, 1x21/5W

### 3-FUNCTION REAR LAMP



REF. No

**8080/21**

Rear Mounting

**P-8080-21**

Spare Lens


TECHNICAL SPECIFICATIONS

**Functions:** Stop, Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x18W, 1x21/5W

### 2-FUNCTION REAR LAMP



REF. No

**8080/23**

Rear Mounting

**P-8080-23**

Spare Lens

TECHNICAL SPECIFICATIONS


**Functions:** Tail, Direction Indicator

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x5W, 2x18W



### 1-FUNCTION REAR LAMP

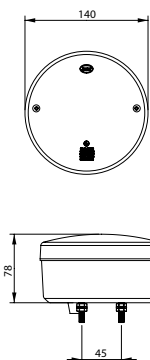

ECE APPROVED

REF. No

**3101.06**

**P-3100.06**


Rear Mounting

Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Tail  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### 1-FUNCTION REAR LAMP



ECE APPROVED

REF. No

**3001.06**

**P-3000.06**


Rear Mounting

Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Tail  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### 1-FUNCTION REAR LAMP



REF. No

**8060/46.06**

Rear Mounting


TECHNICAL SPECIFICATIONS

**Functions:** Tail  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W



---


# FRONT POSITION LAMPS & DRL

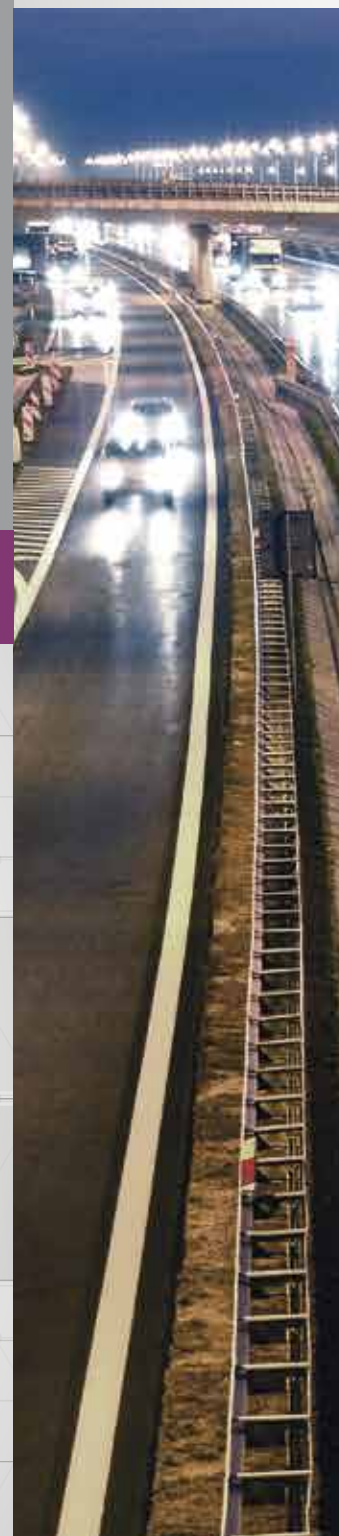





### FRONT LED HIGH BEAM LAMP



ECE APPROVED EMC APPROVED


REF. No  
**DSL-HB10**

TECHNICAL SPECIFICATIONS

**Functions:** High Beam, Front Position, Daytime Running Lamp  
**Operating Voltage:** 10-30V  
**Consumption:** HB: 15W, DRL: 7W, F: 0,5W  
**Type of Protection:** IP67

NEW

### FRONT LED HIGH BEAM LAMP




ECE APPROVED EMC APPROVED

REF. No  
**DSL-HBD10**

TECHNICAL SPECIFICATIONS

**Functions:** High Beam, Direction Indicator Lamp  
**Operating Voltage:** 10-30V  
**Consumption:** HB: 15W, DRL: 7W, F: 0.5W  
**Type of Protection:** IP67

### FRONT LED LOW BEAM LAMP



ECE APPROVED EMC APPROVED


REF. No  
**DSL-LB10**

TECHNICAL SPECIFICATIONS

**Functions:** Low Beam, Front Position, Daytime Running Light  
**Operating Voltage:** 10-30V  
**Consumption:** LB: 15W, DRL: 7W, F: 0,5W  
**Type of Protection:** IP67

NEW

### FRONT LED HIGH BEAM LAMP




ECE APPROVED EMC APPROVED

REF. No  
**DSL-LBD10**

TECHNICAL SPECIFICATIONS

**Functions:** Low Beam, Direction Indicator Lamp  
**Operating Voltage:** 10-30V  
**Consumption:** LB: 15W, DRL: 7W, F: 0.5W  
**Type of Protection:** IP67

### FRONT LED POSITION LAMP

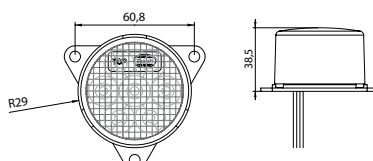



ECE APPROVED EMC APPROVED SAE DOT APPROVED

REF. No  
**DSL0400FT**

TECHNICAL SPECIFICATIONS

**Functions:** Front Position lamp  
**Operating Voltage:** 10-30V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

### FRONT FOG LED LAMP





EMC APPROVED

REF. No  
**DSL-FF10** Front Fog LED Lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 10-30V DC  
**Consumption:** 12W  
**Type of Protection:** IP67

### LED FRONT POSITION LAMP





ECE APPROVED

REF. No  
**DSL400FT** Front Position

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 10-30V DC  
**Consumption:** 0.5W  
**Type of Protection:** IP67

### 2-FUNCTION LED FRONT LAMP




ECE APPROVED

REF. No  
**DSL-210TDLB** With base

TECHNICAL SPECIFICATIONS  
**Functions:** Front Position, Front Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** 4W  
**Type of Protection:** IP67

### 2-FUNCTION LED FRONT LAMP




EMC APPROVED

SAE DOT APPROVED

REF. No  
**DSL-210TDL** Without base

TECHNICAL SPECIFICATIONS  
**Functions:** Front Position, Front Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** 4W  
**Type of Protection:** IP67

### LED DAYTIME RUNNING LAMP




ECE APPROVED

REF. No		REF. No	
<b>DRTL-205</b>	with 5 LEDs	<b>DRTL-207</b>	with 7 LEDs
<b>DRTL-206</b>	with 6 LEDs	<b>DRTL-208</b>	with 8 LEDs

TECHNICAL SPECIFICATIONS  
**Functions:** Front Position, Daytime Running light  
**Operating Voltage:** 10-30V DC  
**Consumption:** D.R.: 7W FRONT: 0,7W  
**Type of Protection:** IP67

## LED DAYTIME RUNNING LAMP

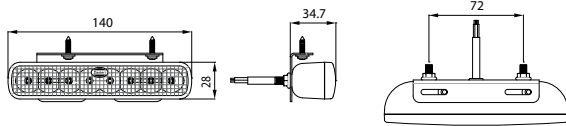

ECE APPROVED

EMC APPROVED


REF. No

**DRTL-108**

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Daytime Running light  
**Operating Voltage:** 10-30V DC  
**Consumption:** D.R.: 3W, Front: 0,5W  
**Type of Protection:** IP67

## FRONT LED POSITION LAMP

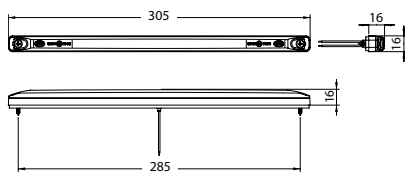

ECE APPROVED

REF. No

**DSL-12FT/12**

Front 12 Volt


**DSL-12FT/24**

Front 24 Volt

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position lamp  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,6W  
**Type of Protection:** IP67

## 1-FUNCTION FRONT LAMP



ECE APPROVED


REF. No

**1070-M022**

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

## 3-FUNCTION FRONT LAMP



REF. No

**4001**

Lamp

**P-4001**


Spare Lens

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W / 1x5W



## 2-FUNCTION FRONT LAMP




REF. No  
**8080/7F** Lamp  
**P-8080-7E** Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W / 1x5W

## 2-FUNCTION FRONT LAMP

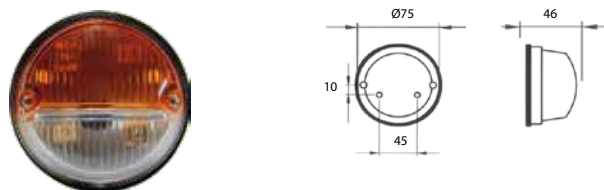


REF. No  
**8080/24** Lamp  
**P-8080-24** Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x18W / 1x5W

## 2-FUNCTION FRONT LAMP

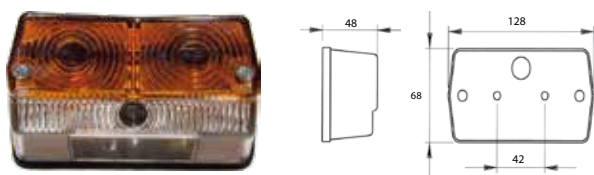


REF. No  
**8080/19E** Lamp  
**P-8080-20E** Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x18W / 1x5W

## 2-FUNCTION FRONT LAMP

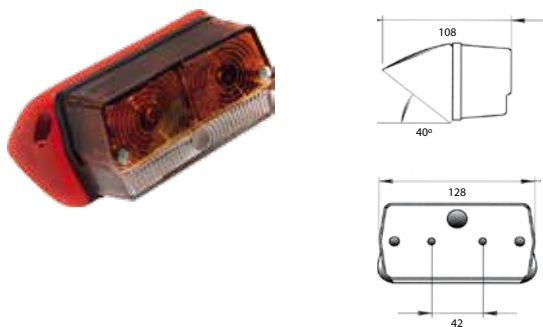


REF. No  
**8080/20E** Lamp with red base  
**P-8080-20E** Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x18W / 1x5W

## 2-FUNCTION FRONT LAMP

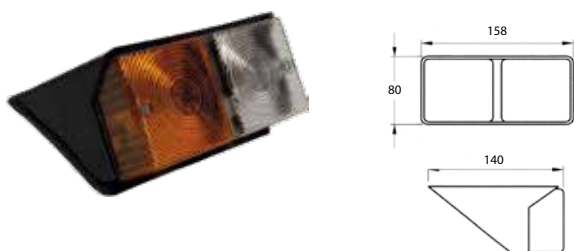

REF. No  
**8080/7EL** Left  
**8080/7ER** Right  
**P-8080-7E** Spare Lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W / 1x5W




---

# DIRECTION INDICATOR LAMPS



## LED REAR DIRECTION INDICATOR LAMP




REF. No  
**DSL-31002A** With amber lens

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** 3W  
**Type of protection:** IP67

ECE APPROVED

## LED REAR DIRECTION INDICATOR LAMP



REF. No  
**DSL-210DIR** With amber lens


TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** 2W  
**Type of protection:** IP67

ECE APPROVED

SAE DOT APPROVED

## LED FRONT / REAR DIRECTION INDICATOR LAMP / DSL0400 SERIES



REF. No  
**DSL0400DIR.05** Rear with amber lens  
**DSL0400DIF.05** Front with amber lens  
**DSL0400DIR.07** Rear with clear lens  
**DSL0400DIF.07** Front with clear lens


TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 9-33V DC  
**Consumption:** 2W  
**Type of protection:** IP67

ECE APPROVED

EMC APPROVED

## LED REAR DIRECTION INDICATOR LAMP




REF. No  
**DSLR400DIR** With clear lens

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 10-30V DC  
**Consumption:** 2W  
**Type of protection:** IP67

ECE APPROVED

### LED SIDE DIRECTION INDICATOR LAMP




REF. No  
**DSL-035** With amber lens

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator Category 5  
**Operating Voltage:** 10-30V  
**Consumption:** 2W  
**Type of protection:** IP67

ECE APPROVED EMC APPROVED

### LED SIDE DIRECTION INDICATOR LAMP

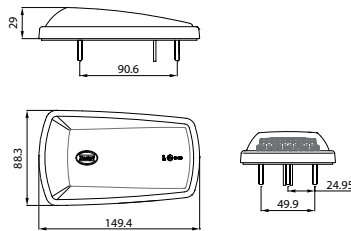


REF. No  
**DSL-036.05** Amber lens, Black base  
**DSL-036S** Smoked Clear lens

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator Category 6  
**Operating Voltage:** 9-33V DC  
**Consumption:** 3W  
**Type of protection:** IP67

ECE APPROVED EMC APPROVED

### REAR DIRECTION INDICATOR LAMP




REF. No  
**3100.05** With amber lens  
**P-3100.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

ECE APPROVED

### REAR DIRECTION INDICATOR LAMP




REF. No  
**3000.05** With amber lens  
**P-3000.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

## FRONT DIRECTION INDICATOR LAMP




REF. No

<b>8060/40R</b>	Right
<b>8060/40L</b>	Left
<b>P-8060-40R</b>	Spare lens, right
<b>P-8060-40L</b>	Spare lens, left

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Direction Indicator
<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>	1x21W

## FRONT DIRECTION INDICATOR LAMP




REF. No

<b>8060/44R</b>	Right with curved rubber base
<b>8060/44L</b>	Left with curved rubber base
<b>8060/44RF</b>	Right with flat rubber base
<b>8060/44LF</b>	Left with flat rubber base
<b>P-8060-44R</b>	Spare lens, right
<b>P-8060-44L</b>	Spare lens, left

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Direction Indicator
<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>	1x21W

## DIRECTION INDICATOR LAMP




REF. No

<b>8060/48.05</b>	With amber lens
<b>8060/48.07</b>	With clear lens
<b>P-8060-48.05</b>	Spare lens, amber
<b>P-8060-48.07</b>	Spare lens, clear

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Direction Indicator
<b>Operating Voltage:</b>	12 or 24V DC
<b>Consumption:</b>	2x21W

## DIRECTION INDICATOR LAMP



REF. No


<b>8060/43.05</b>	With amber lens
<b>P-8060-43.05</b>	Spare lens, amber

TECHNICAL SPECIFICATIONS

<b>Functions:</b>	Direction Indicator
<b>Operating Voltage:</b>	12 or 24V
<b>Consumption:</b>	1x18W



## FRONT / REAR DIRECTION INDICATOR LAMP / 1070 SERIES



REF. No

**1070-M004**

Front with clear lens

**1070-M004.05**


Front with amber lens

### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

ECE APPROVED

## FRONT / SIDE DIRECTION INDICATOR LAMP



REF. No

**8080/35**

Front or Side with amber lens


**P-8080-35**

Spare lens, amber

### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

## SIDE DIRECTION INDICATOR LAMP



REF. No

**8080/32**

Side with amber lens


**P-8080-32**

Spare lens, amber

### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W


## FRONT / SIDE DIRECTION INDICATOR LAMP



REF. No  
**8060/47** Front or Side with amber lens  
**8060/47B** Front or Side with long base & amber lens  
**P-8060-47** Spare lens, amber


### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W



ECE APPROVED

## DIRECTION INDICATOR LAMP




REF. No  
**8080/95B.05** Amber with bracket  
**P-8080-95.05** Spare lens, amber

### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

ECE APPROVED

## LED REAR DIRECTION INDICATOR LAMP




REF. No  
**8080/96B.05**  
**P-8080/96.05** Spare lens, amber

### TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

ECE APPROVED



### DIRECTION INDICATOR LAMP



REF. No  
**8080/33** With amber lens  
**P-8080-33** Spare lens, amber

TECHNICAL SPECIFICATIONS  
**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W


### DIRECTION INDICATOR LAMP



REF. No  
**8060/46.05** With amber lens  
**P-8060-46.05** Spare lens, amber

TECHNICAL SPECIFICATIONS  
**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W


### DIRECTION INDICATOR LAMP



REF. No  
**8080/37.05** With amber lens  
**8080/37.07** With clear lens

TECHNICAL SPECIFICATIONS  
**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x3W

### FRONT DIRECTION INDICATOR LAMP



REF. No  
**8080/36** With amber lens  
**8080/36.07** With clear lens  
**P-8080-36** Spare lens, amber  
**P-8080-36.07** Spare lens, clear

TECHNICAL SPECIFICATIONS  
**Functions:** Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x21W

ECE APPROVED



---


# REVERSING LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)





### LED REVERSING LAMP

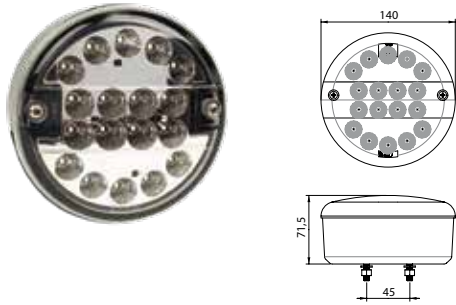


REF. No  
**DSL-3104** LED Reversing lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 9-33V DC  
**Functions:** Reversing  
**Consumption:** 3W  
**Type of Protection:** IP67

ECE APPROVED

### LED REVERSING LAMP

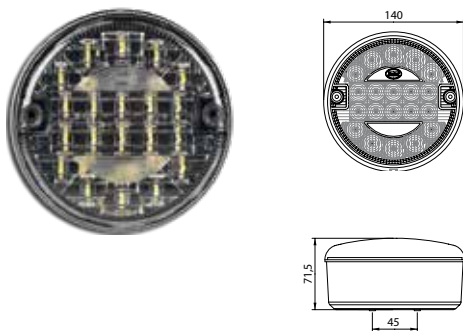


REF. No  
**DSL-31042W** LED Reversing lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 9-33V DC  
**Functions:** Reversing  
**Consumption:** (12/24V) 2,3/2,4W  
**Type of Protection:** IP67

ECE APPROVED

### LED REVERSING LAMP

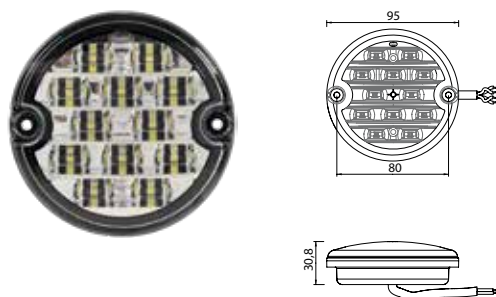


REF. No  
**DSL-210RL** LED Reversing lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 9-33V DC  
**Functions:** Reversing  
**Consumption:** 3W  
**Type of Protection:** IP67

ECE APPROVED EMC APPROVED



### LED REVERSING LAMP



REF. No

**DSL-24/12**

12V LED Reversing lamp

**DSL-24/24**

24V LED Reversing lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC


**Functions:** Reversing

**Consumption:** (12V/24V) 2.7W/2W

**Type of Protection:** IP67

ECE APPROVED

### LED REVERSING LAMP



REF. No

**RVL-LED-80**

LED Reversing lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC


**Functions:** Reversing

**Consumption:** 2W

**Type of Protection:** IP67

ECE APPROVED

### LED REVERSING LAMP

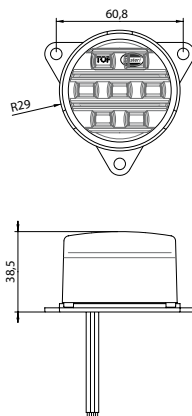

REF. No

**DSL0400RVL**

LED Reversing lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC

**Functions:** Reversing


**Consumption:** 2W

**Type of Protection:** IP67

ECE APPROVED

EMC APPROVED

### REVERSING LAMP




REF. No  
**3104.07** Reversing lamp  
**P-3100.07** Spare lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W

ECE APPROVED

### REVERSING LAMP




REF. No  
**3004.07** Reversing lamp  
**P-3000.07** Spare lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W

ECE APPROVED

### REVERSING LAMP




REF. No  
**W160-GRL** Reversing lamp  
**W163-GRL** Reversing lamp with connector and base

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 12V 55W (H3)  
 24V 70W (H3)

ECE APPROVED

### REVERSING LAMP




REF. No  
**1070-M042** Reversing lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W

ECE APPROVED

### REVERSING LAMP




REF. No  
**8080/95.07** Reversing lamp  
**P-8080-95.07** Spare lens

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W

ECE APPROVED


### REVERSING LAMP



REF. No  
**8080/96.07** Reversing lamp  
**P-8080-96.07** Spare lens

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W

### REVERSING LAMP



REF. No  
**8060/46.07** Reversing lamp  
**P-8060-46.07** Spare lens

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Reversing  
**Consumption:** 1x21W



---


# FOG LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)





### FRONT FOG LED LAMP




REF. No  
**DSL-FF10** Front Fog LED Lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 12W  
**Type of Protection:** IP67

ECE APPROVED

### LED FOG LAMP




REF. No  
**DSL-3103** With red lens  
**DSL-3103.07** With clear lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC  
**Functions:** Fog  
**Consumption:** 4W  
**Type of Protection:** IP67

ECE APPROVED

### LED FOG LAMP




REF. No  
**DSL-31032R** With red lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC  
**Functions:** Fog  
**Consumption:** (12/24V) 2,7W/2,8W  
**Type of Protection:** IP67

ECE APPROVED

### LED FOG LAMP




REF. No  
**DSL-23/12** With red lens 12V  
**DSL-23/24** With red lens 24V

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 2W  
**Type of Protection:** IP67

ECE APPROVED

### LED FOG LAMP



REF. No  
**DSL-210FL** With red lens

TECHNICAL SPECIFICATIONS


**Operating Voltage:** 9-33V DC  
**Functions:** Fog  
**Consumption:** 4W  
**Type of Protection:** IP67

ECE APPROVED

EMC APPROVED



### LED FOG LAMP




ECE APPROVED    EMC APPROVED    SAE DOT APPROVED

REF. No  
**DSL0400FLR**      With red lens

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 9-33V DC  
**Functions:** Fog  
**Consumption:** 4W  
**Type of Protection:** IP67

### FOG LAMP




ECE APPROVED

REF. No  
**3003.06**      With red lens  
**P-3000.06**      Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 1x21W

### FOG LAMP




ECE APPROVED

REF. No  
**3103.06**      With red lens  
**P-3100.06**      Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 1x21W

### FOG LAMP




ECE APPROVED

REF. No  
**8080/95.06**      With red lens and rubber base  
**P-8080-95.06**      Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 1x21W

### FOG LAMP




ECE APPROVED

REF. No  
**8080/96.06**      With red lens and rubber base  
**P-8080-96.06**      Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 1x21W

### FOG LAMP

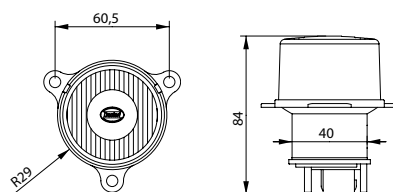

ECE APPROVED

REF. No  
**1070-M162**      With red lens


TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Fog  
**Consumption:** 1x21W



---


# STOP & THIRD STOP LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)

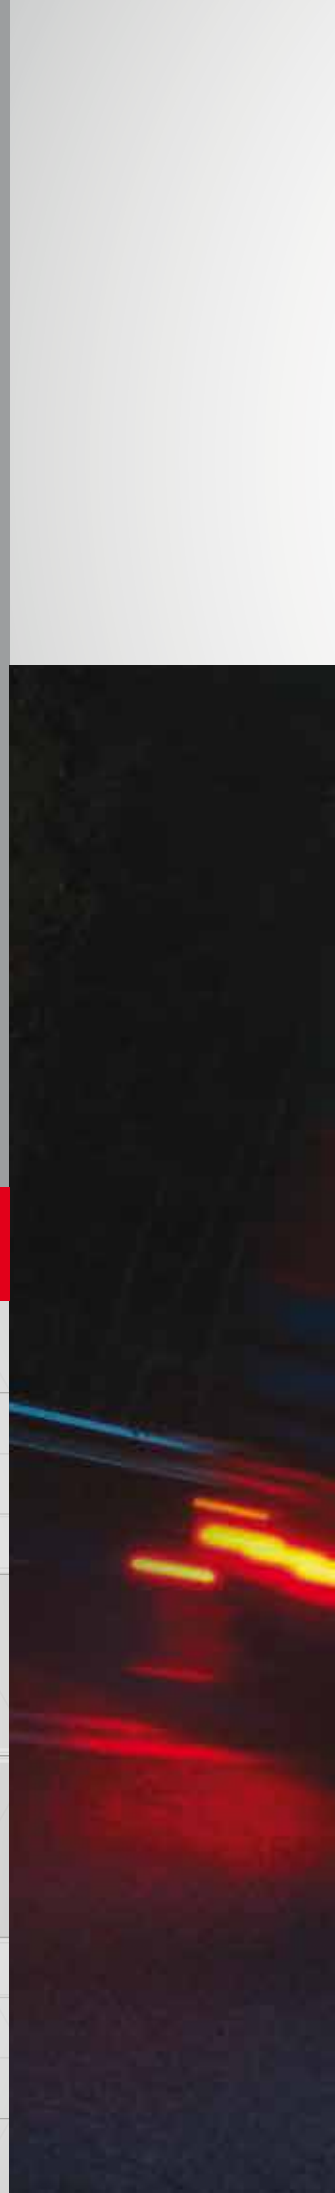



## LED THIRD STOP LAMP

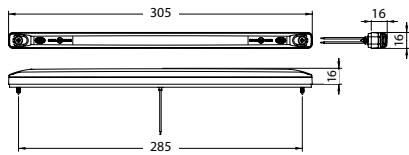

ECE APPROVED

SAE DOT APPROVED


REF. No

- DSL-12S312** Third stop lamp 12V, clear lens
- DSL-12S324** Third stop lamp 24V, clear lens
- DSL-12S312.06** Third stop lamp 12V, red lens
- DSL-12S324.06** Third stop lamp 24V, red lens

### TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Functions:** Third Stop
- Consumption:** 1W
- Type of Protection:** IP67

## LED THIRD STOP LAMP 12 OR 24V



ECE APPROVED

EMC APPROVED


REF. No

- DSL-12.1206** Third stop lamp 12V
- DSL-24.1206** Third stop lamp 24V

### TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Functions:** Third Stop
- Consumption:** 5W
- Type of Protection:** IP67

## LED THIRD STOP LAMP 10-30V



ECE APPROVED


REF. No

- DSL0400S3** Third stop lamp

### TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Functions:** Third Stop
- Consumption:** 2W
- Type of Protection:** IP67

**STOP LAMP**




REF. No  
**3002.06** Stop lamp  
**P-3000.06** Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Stop  
**Consumption:** 1x21W

ECE APPROVED


**STOP LAMP**



REF. No  
**8060/46.06** Stop lamp  
**P-8060-46.06** Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Stop  
**Consumption:** 1x21W

**STOP LAMP**




REF. No  
**3102.06** Stop lamp  
**P-3100.06** Spare lens, red

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Stop  
**Consumption:** 1x21W

ECE APPROVED

**STOP LAMP**

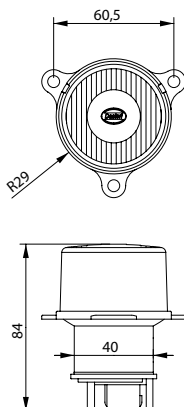

REF. No  
**1070-M142** Stop lamp

TECHNICAL SPECIFICATIONS  
**Operating Voltage:** 12 or 24V DC  
**Functions:** Stop  
**Consumption:** 1x21W

ECE APPROVED



---

# LED WORK LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)









## LED WORK LAMP WRK-LED-40 SERIES

### TECHNICAL SPECIFICATIONS



**Operating Voltage:** 10 - 30V DC  
**Lumens Output:** 840 lm  
**Consumption:** 10W  
**Operating Temperature:** -40 °C to + 85 °C  
**Type of Protection:** IP67



EMC APPROVED

### SPOT



REF. No  
**WRK-LED-40S**



EMC APPROVED

### NARROW SPOT

REF. No  
**WRK-LED-40NS**





EMC APPROVED

### FLOOD

REF. No  
**WRK-LED-40F**

## LED WORK LAMP



EMC APPROVED



REF. No  
**WRK-LED-80**  
**WRK-LED-80BL**

LED work lamp  
 LED work lamp, Blue emitting light (for agricultural use)

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 9W  
**Operating Temperature:** -40 °C to +80 °C  
**Light Output:** 600 lm  
**Type of Protection:** IP67

## LED WORK LAMP




REF. No  
**WRK-LED-100**  
**WRK-LED-100S**

LED work lamp  
 LED work lamp, spot

### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 12W  
**Operating Temperature:** -40 °C to +60 °C  
**Light Output:** 500 lm  
**Type of Protection:** IP67

### LED WORK LAMP



EMC APPROVED


REF. No

**WRK-LED-120** LED work lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 16,5W  
**Operating Temperature:** -40 °C to +80 °C  
**Light Output:** 1200 lm  
**Type of Protection:** IP67

### LED WORK LAMP




REF. No

**WRK-LED-150** LED work lamp  
**WRK-LED-150S** LED work lamp, spot

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 30W/27W  
**Operating Temperature:** -40 °C to +60 °C  
**Light Output:** 1400 lm  
**Type of Protection:** IP67

### LED WORK LAMP




REF. No

**WRK-LED-160** LED work lamp  
**WRK-LED-160S** LED work lamp, spot

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 22W/20W  
**Operating Temperature:** -40 °C to +60 °C  
**Light Output:** 1000 lm  
**Type of Protection:** IP67

### LED WORK LAMP



EMC APPROVED


REF. No

**WRK-LED-180** 1800 Lumens  
**WRK-LED-180H** 3600 Lumens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9 - 32V DC  
**Light Output:** 1800 / 3600 lm  
**Consumption:** 1800 lm 22W, 3600 lm 36W  
**Operating Temperature:** -40 °C + 85 °C  
**Type of Protection:** IP69

**LED WORK LAMP**




REF. No

- WRKE-LED-200F** Flood Beam
- WRKE-LED-200S** Spot Beam

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** 27W
- Operating Temperature:** -40 °C to +80 °C
- Lumen Output:** 2000 lm
- Type of Protection:** IP67

**LED WORK LAMP**




REF. No

- WRKE-LED-210F** Flood Beam
- WRKE-LED-210S** Spot Beam

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** 27W
- Operating Temperature:** -40 °C to +80 °C
- Light Output:** 2000 lm
- Type of Protection:** IP67

**LED WORK LAMP**




REF. No

- WRKR-LED-10** Rechargeable handheld LED work lamp, with on/off and color change switch (yellow/white)

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** 12W
- Operating Temperature:** -40 °C to +60 °C
- Lumen Output:** 840 lm
- Type of Protection:** IP67

**WORK LAMP**



REF. No


- W160-G** Work lamp
- W161-G** With U-shaped metal base
- W162-G** With connector
- W163-G** With U-shaped metal base and connector

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 12V 55W (H3) / 24V 70W (H3)
- Type of Protection:** IP67

\* G: Glass Lens

**WORK LAMP**



REF. No


- W152-G** With handled
- W152-G/g** With handled and grill
- W153-G** With handled and U-shaped metal base
- W153-G/g** With handled, grill and U-shaped metal base

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 12V 55W (H3) / 24V 70W (H3)

\* G: Glass Lens / g: Grill

### WORK LAMP




- REF. No  
**W150-G** Work lamp  
**W150-G/g** With grill  
**W151-G** With U-shaped metal base  
**W151-G/g** With grill and U-shaped metal base  
**W154-G** Work lamp  
**W155-G** Work lamp with U-shaped metal base

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 55W (H3) / 24V 70W (H3)

\* G: Glass Lens / g: Grill

### WORK LAMP

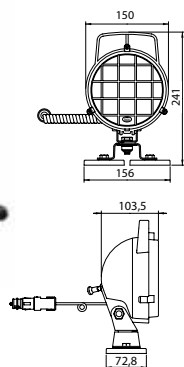


- REF. No  
**130-GG/M** With magnetic base and cigarette plug

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 55W (H3) / 24V 70W (H3)

### WORK LAMP




- REF. No  
**130-P** With PC lens (H3 12V)  
**130-P/g** With PC lens and grill (H3 12V)  
**130-G** With glass lens switch (H3 12/24V)  
**130-G/g** With glass lens switch and grill (H3 12/24V)

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V 55W (H3) / 24V 70W (H3)

\* G: Glass Lens / g: Grill

### MAIN OR OPERATING HEADLAMP



- REF. No  
**HL-1.001** Headlamp with side cable exit  
**HL-1.002** Headlamp with bottom cable exit

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 12V: R2 (45/40 W) P45t H4  
 24V: R2 (55 / 50 W) P45t  
**Fitting:** M14



---

# NUMBER PLATE LAMPS


— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)







### LED NUMBER PLATE LAMP



ECE APPROVED


REF. No

- DSL-41A/12** 12 Volt **L-41A/12** Lens with LED unit 12V
- DSL-41A/24** 24 Volt **L-41A/24** Lens with LED unit 24V

TECHNICAL SPECIFICATIONS

- Functions:** Number Plate Lamp
- Operating Voltage:** 12 or 24V DC
- Consumption:** 0,5W
- Type of protection:** IP67

### LED TAIL - NUMBER PLATE LAMP



ECE APPROVED


REF. No

- DSL-41B/12** 12 Volt **L-41B/12** Lens with LED unit 12V
- DSL-41B/24** 24 Volt **L-41B/24** Lens with LED unit 24V

TECHNICAL SPECIFICATIONS

- Functions:** Number Plate Lamp
- Operating Voltage:** 12 or 24V DC
- Consumption:** 0,5W
- Type of protection:** IP67

### LED NUMBER PLATE LAMP



ECE APPROVED


REF. No

- DSL-43A/12** 12 Volt **L-43A/12** Lens with LED unit 12V
- DSL-43A/24** 24 Volt **L-43A/24** Lens with LED unit 24V

TECHNICAL SPECIFICATIONS

- Functions:** Number Plate Lamp
- Operating Voltage:** 12 or 24V DC
- Consumption:** 0,5W
- Type of protection:** IP67

### LED TAIL - NUMBER PLATE LAMP



ECE APPROVED


REF. No

- DSL-43B/12** 12 Volt **L-43B/12** Lens with LED unit 12V
- DSL-43B/24** 24 Volt **L-43B/24** Lens with LED unit 24V

TECHNICAL SPECIFICATIONS

- Functions:** Number Plate Lamp
- Operating Voltage:** 12 or 24V DC
- Consumption:** 0,5W
- Type of protection:** IP67

### LED NUMBER PLATE LAMP



ECE APPROVED

REF. No

- DSL-42A/12** 12 Volt
- DSL-42A/24** 24 Volt


TECHNICAL SPECIFICATIONS

- Functions:** Number Plate Lamp
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1,2W
- Type of protection:** IP67

### LED NUMBER PLATE LAMP



ECE APPROVED



REF. No  
**DSL-44/12** 12 Volt  
**DSL-44/24** 24 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Number Plate Lamp  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1,2W  
**Type of protection:** IP67


### LED NUMBER PLATE LAMP



ECE APPROVED

EMC APPROVED

SAE DOT APPROVED



REF. No  
**DSL-45** LED Number Plate Lamp


TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

### NUMBER PLATE LAMP



ECE APPROVED



REF. No  
**8060/41A** With black cover  
**8060/41B** With red cover


TECHNICAL SPECIFICATIONS

**Functions:** Number Plate Lamp  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### NUMBER PLATE LAMP



ECE APPROVED



REF. No  
**8060/43A** With black cover


TECHNICAL SPECIFICATIONS

**Functions:** Number Plate Lamp  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### NUMBER PLATE LAMP



ECE APPROVED



REF. No  
**8060/42** With black cover

TECHNICAL SPECIFICATIONS

**Functions:** Number Plate Lamp  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W



---

# MARKER LAMPS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)






## 2-FUNCTION LED MARKER LAMP / DSL-570 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 0,4W / 0,8W  
**Type of Protection:** IP67



### FOR SURFACE MOUNTING


REF. No

**DSL570-0.067** With 1m cable

**DSL571-0.067** With 2-pole connector

ECE APPROVED

EMC APPROVED



### WITH BRACKET


REF. No

**DSL570-1.067** With 1m cable

**DSL571-1.067** With 2-pole connector

ECE APPROVED

EMC APPROVED

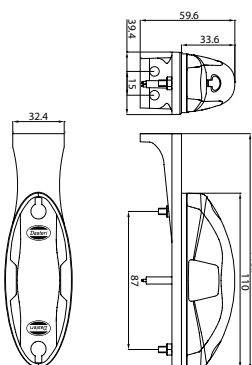

### WITH ANGLED BRACKET

REF. No

**DSL570-2.067** With 1m cable

**DSL571-2.067** With 2-pole connector

ECE APPROVED



EMC APPROVED



### 3-FUNCTION LED MARKER LAMP / DSL-570 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position, Side Marker  
**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 0,4W / 0,8W  
**Type of Protection:** IP67




#### FOR SURFACE MOUNTING

REF. No

- DSL570-0.567** With 1m cable
- DSL571-0.567** With 2-pole connector

ECE APPROVED

EMC APPROVED




#### WITH BRACKET

REF. No

- DSL570-1.567** With 1m cable
- DSL571-1.567** With 2-pole connector

ECE APPROVED

EMC APPROVED



#### WITH ANGLED BRACKET



REF. No

- DSL570-2.567** With 1m cable
- DSL571-2.567** With 2-pole connector

ECE APPROVED

EMC APPROVED

## FRONT & REAR LED POSITION MARKER LAMP



ECE APPROVED

REF. No


**DSL-580.067**

Red - Clear

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 10 - 30V DC  
**Consumption:** 1,4W  
 0,7W/1,4W for single-function  
**Type of Protection:** IP67

## 2-FUNCTION LED MARKER LAMP



REF. No

**DSL-615.367**

Red - Clear lens

**DSL-615.365**

Red - Amber lens

**DSL-P-615.06**

Spare lens with 3 LEDs, Red

**DSL-P-615.07**

Spare lens with 3 LEDs, Clear


**DSL-P-615.05**

Spare lens with 3 LEDs, Amber

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

## 2-FUNCTION LED MARKER LAMP



REF. No

**DSL-610.367**

Red - Clear lens

**DSL-610.365**

Red - Amber lens

**DSL-P-610.06**

Spare lens with 3 LEDs, Red

**DSL-P-610.07**

Spare lens with 3 LEDs, Clear

**DSL-P-610.05**


Spare lens with 3 LEDs, Amber

ECE APPROVED

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

## 2-FUNCTION LED MARKER LAMP



REF. No

**DSL-611.367**

Red - Clear lens

**DSL-611.365**

Red - Amber lens

**DSL-P-610.06**

Spare lens with 3 LEDs, Red

**DSL-P-610.07**

Spare lens with 3 LEDs, Clear

**DSL-P-610.05**


Spare lens with 3 LEDs, Amber

ECE APPROVED

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

## 2-FUNCTION LED MARKER LAMP




REF. No

- DSL-616.367** Red - Clear lens
- DSL-616.365** Red - Amber lens
- DSL-P-610.06** Spare lens with 3 LEDs, Red
- DSL-P-610.07** Spare lens with 3 LEDs, Clear
- DSL-P-610.05** Spare lens with 3 LEDs, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1W
- Type of Protection:** IP67

## 2-FUNCTION LED MARKER LAMP



REF. No


- DSL-613.367** Red - Clear lens
- DSL-613.365** Red - Amber lens
- DSL-P-610.06** Spare lens with 3 LEDs, Red
- DSL-P-610.07** Spare lens with 3 LEDs, Clear
- DSL-P-610.05** Spare lens with 3 LEDs, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1W
- Type of Protection:** IP67

ECE APPROVED

## 2-FUNCTION LED MARKER LAMP



REF. No


- DSL-612.367** Red - Clear lens
- DSL-612.365** Red - Amber lens
- DSL-P-610.06** Spare lens with 3 LEDs, Red
- DSL-P-610.07** Spare lens with 3 LEDs, Clear
- DSL-P-610.05** Spare lens with 3 LEDs, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1W
- Type of Protection:** IP67

ECE APPROVED

## 3-FUNCTION LED MARKER LAMP



REF. No


- DSL-620.567/12L** Left, 12 Volt
- DSL-620.567/12R** Right, 12 Volt
- DSL-620.567/24L** Left, 24 Volt
- DSL-620.567/24R** Right, 24 Volt
- L-622.567/12** 12 Volt Spare LED Unit
- L-622.567/24** 24 Volt Spare LED Unit

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position, Side Marker
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1,2W
- Type of Protection:** IP67

ECE APPROVED

### 3-FUNCTION LED MARKER LAMP



ECE APPROVED


REF. No

- DSL-622.567** Red - Clear - Amber lens
- L-622.567/12** 12 Volt Spare LED Unit
- L-622.567/24** 24 Volt Spare LED Unit

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position, Side Marker
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1,2W
- Type of Protection:** IP67

### 3-FUNCTION LED MARKER LAMP

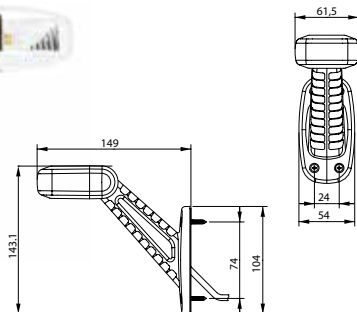

ECE APPROVED


REF. No

- DSL-630V567R** Right for vertical mounting
- DSL-630V567L** Left for vertical mounting
- DSL-630H567R** Right for horizontal mounting
- DSL-630H567L** Left for horizontal mounting

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position, Side Marker
- Operating Voltage:** 10-30V DC
- Consumption:** 0,8W
- Type of Protection:** IP67

### 3-FUNCTION MARKER LAMP



ECE APPROVED


REF. No

- 620.0567** With 1m cable
- 620.0567TS** With click-in system and 1m cable
- P-620.0567** Spare lens, Red - Clear - Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position, Side Marker
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1x4W
- Type of Protection:** IP67

### 3-FUNCTION MARKER LAMP



ECE APPROVED


REF. No

- 622.567** Red - Clear - Amber lens
- P-620.0567** Spare lens

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position, Side Marker
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1x4W
- Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP



ECE APPROVED


REF. No

- 615.067** Red - Clear lens
- 615.065** Red - Amber lens
- P-615.06** Spare lens, Red
- P-615.07** Spare lens, Clear
- P-615.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position
- Operating Voltage:** 12 or 24V DC
- Consumption:** 1x5W
- Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP




ECE APPROVED

- REF. No  
**610.067** Red - Clear lens  
**610.065** Red - Amber lens  
**P-610.06** Spare lens, Red  
**P-610.07** Spare lens, Clear  
**P-610.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP




ECE APPROVED

- REF. No  
**611.067** Red - Clear lens  
**611.065** Red - Amber lens  
**P-610.06** Spare lens, Red  
**P-610.07** Spare lens, Clear  
**P-610.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP




ECE APPROVED

- REF. No  
**616.067** Red - Clear lens  
**616.065** Red - Amber lens  
**P-610.06** Spare lens, Red  
**P-610.07** Spare lens, Clear  
**P-610.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP




ECE APPROVED

- REF. No  
**613.067** Red - Clear lens  
**613.065** Red - Amber lens  
**P-610.06** Spare lens, Red  
**P-610.07** Spare lens, Clear  
**P-610.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

### 2-FUNCTION MARKER LAMP



ECE APPROVED

- REF. No  
**612.067** Red - Clear lens  
**612.065** Red - Amber lens  
**P-610.06** Spare lens, Red  
**P-610.07** Spare lens, Clear  
**P-610.05** Spare lens, Amber

TECHNICAL SPECIFICATIONS

- Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W  
**Type of Protection:** IP67

## 2-FUNCTION MARKER LAMP / 512 SERIES


TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Consumption:** 1x5W / 2x5w

**Operating Voltage:** 12 or 24V DC  
**Type of Protection:** IP67



ECE APPROVED




### FOR SURFACE MOUNTING

- REF. No  
**512-0.067** Red - Clear lens  
**512-0.05** Amber lens  
**512-0.06** Red lens



ECE APPROVED




### WITH BRACKET

- REF. No  
**512-1.067** Red - Clear lens  
**512-1.05** Amber lens  
**512-1.06** Red lens



ECE APPROVED



### DOUBLE WITH BRACKET

- REF. No  
**512-2.067** Red - Clear lens  
**512-2.05** Amber lens  
**512-2.06** Red lens

### SPARE LENS

- REF. No  
**P-512.067** Spare lens, Red - Clear  
**P-512.05** Spare lens, Amber  
**P-512.06** Spare lens, Red

## 2-FUNCTION MARKER LAMP / 513 SERIES


TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Consumption:** 1x5W

**Operating Voltage:** 12 or 24V DC  
**Type of Protection:** IP67



ECE APPROVED




### FOR SURFACE MOUNTING

- REF. No  
**513-0.067** Red - Clear lens  
**513-0.05** Amber lens  
**513-0.06** Red lens



ECE APPROVED




### WITH BRACKET

- REF. No  
**513-1.067** Red - Clear lens  
**513-1.05** Amber lens  
**513-1.06** Red lens



ECE APPROVED



### WITH ANGLED BRACKET

- REF. No  
**513-2.067** Red - Clear lens  
**513-2.05** Amber lens  
**513-2.06** Red lens



### SPARE LENS

- REF. No  
**P-513.067** Spare lens, Red - Clear  
**P-513.05** Spare lens, Amber  
**P-513.06** Spare lens, Red



NEW

LED SIDE MARKER LAMP



ECE APPROVED EMC APPROVED

REF. No


**DSL-650.05**  
**DSL-650.05TS**

Sidemarkers / D.I.  
With Click-in connector  
DSL-MDI Module box (required,  
see Wiring Kits & Various Parts  
category)

TECHNICAL SPECIFICATIONS

**Functions:** Direction Indicator, Side  
Marker, Reflex Reflector  
**Operating Voltage:** 24V  
**Consumption:** 2.18W  
**Type of Protection:** IP67

LED SIDE MARKER LAMP



ECE APPROVED EMC APPROVED SAE DOT APPROVED

REF. No

**DSL-590.05**


With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Sidemarkers, Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** 1.1W  
**Type of Protection:** IP67

NEW

LED SIDE MARKER LAMP

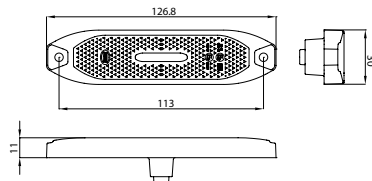

ECE APPROVED EMC APPROVED SAE DOT APPROVED

REF. No


**DSL-595.05**

With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Sidemarkers, Reflex Reflector  
**Operating Voltage:** 10-30V DC  
**Consumption:** 1.1W  
**Type of Protection:** IP67

LED SIDE MARKER LAMP



ECE APPROVED

REF. No


**535-0.05**

With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 9-33V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

LED SIDE MARKER LAMP



ECE APPROVED

REF. No

**536-0.05**

With Reflex Reflector and  
Angled Base


TECHNICAL SPECIFICATIONS

**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 9-33V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

## LED SIDE MARKER LAMP / 560 SERIES

TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67




### FOR SURFACE MOUNTING

REF. No  
**560-0.05/12** 12 Volt  
**560-0.05/24** 24 Volt

ECE APPROVED EMC APPROVED



## LED SIDE MARKER LAMP / 560L LONG VERSION




REF. No  
**560L-0.05/12** 12V For Surface Mounting  
**560L-0.05/24** 24V For Surface Mounting

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V  
**Consumption:** 12V:1.5W 24V:0.9W  
**Type of Protection:** IP67

ECE APPROVED EMC APPROVED




### WITH ANGLED BRACKET

REF. No  
**560-2.05/12** 12 Volt  
**560-2.05/24** 24 Volt

ECE APPROVED EMC APPROVED

## LED SIDE MARKER LAMP



REF. No  
**DSL-3040/24** For SETRA buses

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 1,3W  
**Type of Protection:** IP67

ECE APPROVED


## LED SIDE MARKER LAMP / 550 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 9-33V DC  
**Consumption:** 1W  
**Type of Protection:** IP67



ECE APPROVED EMC APPROVED




### FOR SURFACE MOUNTING

REF. No  
**550-0.05** With 1m cable  
**550-0.05TS** With click-in system and 0,5m cable  
**550-0.05TS15** With click-in system and 1,5m cable



ECE APPROVED EMC APPROVED




### WITH ANGLED BRACKET

REF. No  
**550-2.05** With 1m cable



ECE APPROVED EMC APPROVED




### WITH 30CM CABLE AND CONNECTOR

REF. No  
**550-0.05D** With 30cm cable for truck DAF-XF

## LED SIDE MARKER LAMP / 542 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67




### FOR SURFACE MOUNTING

- REF. No  
**542-0.05/24** With reflex reflector and 20cm cable  
**542E0-0.05** Eco Line, 10-30V, with Cable  
**542E1-0.05** Eco Line, 10-30V, with 2-pole Connector

ECE APPROVED

EMC APPROVED




### WITH ANGLED BRACKET

- REF. No  
**542-2.05/24** With reflex reflector and 20cm cable  
**542E0-2.05** Eco Line, 10-30V, with Cable  
**542E1-2.05** Eco Line, 10-30V, with 2-pole Connector

ECE APPROVED

EMC APPROVED




### WITH ANGLED BRACKET AND CLICK-IN CONNECTOR

- REF. No  
**542-2.05TS** With reflex reflector and click-in cable connector

ECE APPROVED

EMC APPROVED



### WITH SPECIAL ANGLED BASE

- REF. No  
**542-P2.05/12 12 Volt** With reflex reflector and 20cm cable  
**542-P2.05/24 24 Volt** With reflex reflector and 20cm cable


ECE APPROVED

EMC APPROVED

## LED SIDE MARKER LAMP / 530L SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67



### FOR SURFACE MOUNTING


REF. No

**530L-0.05/12**

With reflex reflector and 20cm cable, 12 Volt

**530L-0.05/24**

With reflex reflector and 20cm cable, 24 Volt



ECE APPROVED



### WITH ANGLED BRACKET


REF. No

**530L-2.05/12**

With reflex reflector and 20cm cable, 12 Volt

**530L-2.05/24**

With reflex reflector and 20cm cable, 24 Volt



ECE APPROVED




### WITH ANGLED BRACKET AND CLICK-IN CONNECTOR

REF. No

**530L-2.05TS**

With reflex reflector and click-in cable connector



ECE APPROVED

## LED SIDE MARKER LAMP




REF. No

**541-0.05/24**

With reflex reflector and connector

**541-2.05/24**

With reflex reflector and angled bracket



### TECHNICAL SPECIFICATIONS

**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

## LED SIDE MARKER LAMP / 540 SERIES

### TECHNICAL SPECIFICATIONS

**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67



### FOR SURFACE MOUNTING


REF. No

**540-0.05/12**

With reflex reflector and 20cm cable, 12 Volt

**540-0.05/24**

With reflex reflector and 20cm cable, 24 Volt



ECE APPROVED



### WITH ANGLED BRACKET


REF. No

**540-2.05/12**

With reflex reflector and 20cm cable, 12 Volt

**540-2.05/24**

With reflex reflector and 20cm cable, 24 Volt




ECE APPROVED



## LED SIDE MARKER LAMP / 543 SERIES

### TECHNICAL SPECIFICATIONS


**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67



### FOR SURFACE MOUNTING

REF. No  
**543-0.05C** With Reflex Reflector

ECE APPROVED

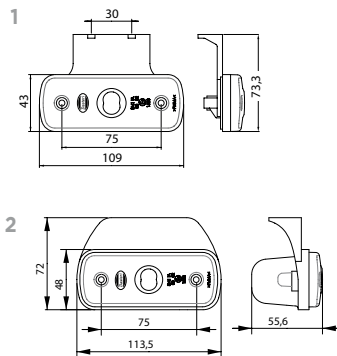


### WITH ANGLED BRACKET VARIATIONS

REF. No  
**543-2.05C** With angled bracket 1  
**543-P2.05C** With angled bracket 2  
**543-P2.05TS** With angled bracket 2 and click-in cable

ECE APPROVED

## LED SIDE MARKER LAMP




REF. No  
**DSL-24.305** With clear lens and amber LEDs

### TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

## LED SIDE MARKER LAMP



REF. No  
**DSL-580.05** Amber

### TECHNICAL SPECIFICATIONS


**Functions:** Side Marker  
**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 0,7W/1,4W  
**Type of Protection:** IP67

ECE APPROVED

## SIDE MARKER LAMP / 531 SERIES

### TECHNICAL SPECIFICATIONS


**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x3W



### FOR SURFACE MOUNTING

REF. No  
**531-0.05** With Reflex Reflector


ECE APPROVED



### WITH ANGLED BRACKET

REF. No  
**532-2.05** With Reflex Reflector


ECE APPROVED



### WITH ANGLED BRACKET AND CLICK-IN CONNECTOR

REF. No  
**532-2.05TS** With Reflex Reflector

ECE APPROVED



### WITH ANGLED BRACKET

REF. No  
**531-P2.05** With angled plastic base

ECE APPROVED

## SIDE MARKER LAMP / 533 SERIES


### TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x3W



### FOR SURFACE MOUNTING

REF. No  
**533-0.05** With Reflex Reflector




ECE APPROVED



### WITH BRACKET

REF. No  
**534-2.05** With Reflex Reflector




ECE APPROVED



### WITH ANGLED BRACKET AND CLICK-IN CONNECTOR

REF. No  
**534-2.05TS** With Reflex Reflector



ECE APPROVED

## SIDE MARKER LAMP / 520 SERIES

### TECHNICAL SPECIFICATIONS


**Functions:** Side Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x3W



### FOR SURFACE MOUNTING

REF. No  
**520-0**

With Reflex Reflector

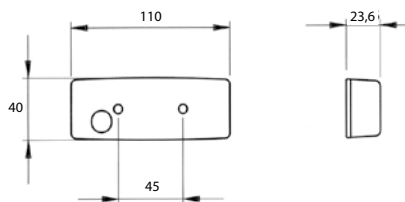


ECE APPROVED



### WITH BRACKET

REF. No  
**520-1**

With Reflex Reflector

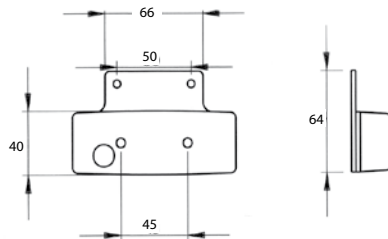


ECE APPROVED



### WITH ANGLED BRACKET

REF. No  
**520-2**  
**P-520.05**

With Reflex Reflector  
 Spare lens, Amber

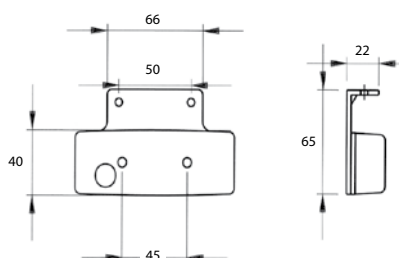


ECE APPROVED

## SIDE MARKER LAMP / 530 SERIES


TECHNICAL SPECIFICATIONS

**Functions:** Front Position, Rear Position  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x3W



### FOR SURFACE MOUNTING

REF. No  
**530-0.05** With Reflex Reflector




ECE APPROVED



### WITH ANGLED BRACKET

REF. No  
**530-2.05** With Reflex Reflector



ECE APPROVED


## SIDE MARKER LAMP




REF. No  
**8080/31.05** Side marker lamp  
**P-8080-31.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W or 1x18W



**SIDE MARKER LAMP**




REF. No  
**133.05** Side marker lamp  
**P-133.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**SIDE MARKER LAMP**




REF. No  
**8080/27** Side marker lamp  
**8080/28** Green marker lamp  
**8080/28.08** Blue marker lamp  
**P-8080-27** Spare lens, amber  
**P-8080-28** Spare lens, green  
**P-8080-28.08** Spare lens, blue

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**SIDE MARKER LAMP**




REF. No  
**8080-51A.05** Side marker lamp  
**P-8080-51A.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**SIDE MARKER LAMP**




REF. No  
**8080-51.05** Side marker lamp  
**P-8080-51.05** Spare lens, amber

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**SIDE MARKER LAMP**




REF. No  
**8080/29.05** Amber  
**8080/29.08** Blue  
**8080/29.09** Green  
**P-8080-29.05** Spare lens, amber  
**P-8080-29.08** Spare lens, blue  
**P-8080-29.09** Spare lens, green

TECHNICAL SPECIFICATIONS

**Functions:** Side Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W



### LED FRONT MARKER LAMP

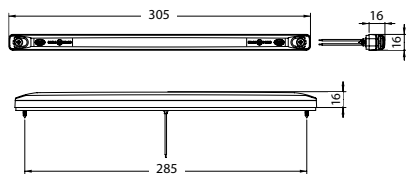

ECE APPROVED


REF. No

- DSL-12FT/12** 12 Volt
- DSL-12FT/24** 24 Volt

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** (12/24V) 0,6W/0,6W
- Type of Protection:** IP67

### LED FRONT MARKER LAMP / 560 SERIES



ECE APPROVED EMC APPROVED

REF. No


- 560-0.07/12** 12 Volt
- 560-0.07/24** 24 Volt

TECHNICAL SPECIFICATIONS

- Functions:** Front Marker, Reflex Reflector
- Operating Voltage:** 12 or 24V DC
- Consumption:** 0,5W
- Type of Protection:** IP67

NEW

### LED FRONT MARKER LAMP / 560L LONG VERSION

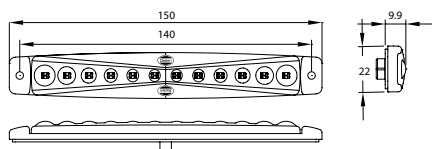

ECE APPROVED EMC APPROVED


REF. No

- 560L-0.07/12** 12V For Surface Mounting
- 560L-0.07/24** 24V For Surface Mounting

TECHNICAL SPECIFICATIONS

- Functions:** Front Marker
- Operating Voltage:** 12 or 24V
- Consumption:** 12V: 0.7W 24V: 0.8W
- Type of Protection:** IP67

### LED FRONT MARKER LAMP



ECE APPROVED EMC APPROVED


REF. No

- 550-0.07** With 1m cable
- 550-0.07TS** With click-in system & 0,5m cable
- 550-0.07TS15** With click-in system & 1,5m cable

TECHNICAL SPECIFICATIONS

- Functions:** Front Marker, Reflex Reflector
- Operating Voltage:** 10-30V DC
- Consumption:** 0,5W
- Type of Protection:** IP67

### LED FRONT POSITION MARKER LAMP

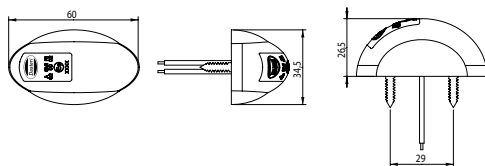

ECE APPROVED


REF. No

- DSL-580.07** Clear

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 10-30V DC
- Consumption:** (12/24V) 0,7W/1,4W
- Type of Protection:** IP67

**LED FRONT MARKER LAMP**

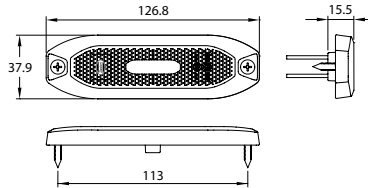

ECE APPROVED EMC APPROVED  
SAE DOT APPROVED


REF. No  
**DSL-590.07** With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker, Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** 0,9W  
**Type of Protection:** IP67



**LED FRONT MARKER LAMP**

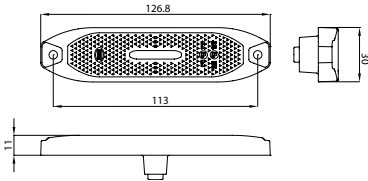


ECE APPROVED EMC APPROVED  
SAE DOT APPROVED

REF. No  
**DSL-595.07** With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker, Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** 0,9W  
**Type of Protection:** IP67

**LED FRONT MARKER LAMP**




ECE APPROVED EMC APPROVED  
SAE DOT APPROVED

REF. No  
**DSL-24.307** Clear lens, White LEDs  
**DSL-24.308** Clear lens, Blue LEDs

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

**LED FRONT MARKER LAMP**




ECE APPROVED

REF. No  
**543-0.07C/12** 12 Volt  
**543-0.07C/24** 24 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

**LED FRONT MARKER LAMP**




ECE APPROVED EMC APPROVED  
SAE DOT APPROVED

REF. No  
**DSL-24.607** Clear lens, white LEDs

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

**LED FRONT MARKER LAMP**



ECE APPROVED

REF. No  
**542-0.07/24** 24 Volt, with 20cm, cable  
**542E0-0.07** Economy Line, 10-30V, cable  
**542E1-0.07** Economy Line, 10-30V, With 2-pole Connector


TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

### LED FRONT MARKER LAMP



ECE APPROVED



REF. No  
**542-0.07TS** With cable and click-in connector


TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

### LED FRONT MARKER LAMP



ECE APPROVED



REF. No  
**DSL-3081/12** 12 Volt  
**DSL-3081/24** 24 Volt


TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:**  
**Type of Protection:** IP67

### FRONT MARKER LAMP



ECE APPROVED




REF. No  
**8080/26** Front marker lamp  
**P-8080-26** Spare lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### FRONT MARKER LAMP




REF. No  
**8080/29.07** Front marker lamp  
**P-8080-29.07** Spare lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### FRONT MARKER LAMP



REF. No

**8080/31.07**

Front marker lamp

**P-8080-31.07**

Spare lens


TECHNICAL SPECIFICATIONS

**Functions:** Front Marker

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x5W

### FRONT MARKER & D.I. LAMP



REF. No

**8080/30.075**

Front marker lamp

**P-8080-30.075**

Spare lens


TECHNICAL SPECIFICATIONS

**Functions:** Front Marker, Direction Indicator

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x5W / 1x18W

### FRONT MARKER LAMP



REF. No

**618.07**

TECHNICAL SPECIFICATIONS


**Functions:** Front Marker

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x5W

ECE APPROVED

### FRONT MARKER LAMP



REF. No

**530-0.07**

TECHNICAL SPECIFICATIONS


**Functions:** Reflex Reflector

**Operating Voltage:** 12 or 24V DC

**Consumption:** 1x3W

ECE APPROVED

### FRONT MARKER LAMP




REF. No  
**8080/34**

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### FRONT MARKER LAMP




REF. No  
**8060/39.07**

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### FRONT MARKER LAMP




REF. No  
**8060/43.07**      Front marker lamp  
**P-8060-43.07**      Spare lens

TECHNICAL SPECIFICATIONS

**Functions:** Front Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### LED REAR MARKER LAMP




REF. No  
**DSL-24.306**

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 1W  
**Type of Protection:** IP67

ECE APPROVED

### LED REAR MARKER LAMP

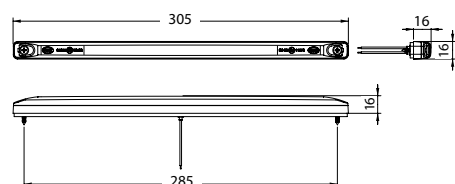


REF. No  
**DSL-12RT/12**      12 Volt, clear lens  
**DSL-12RT/24**      24 Volt, clear lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12/24V) 0,6W/0,6W  
**Type of Protection:** IP67

ECE APPROVED

### LED REAR MARKER LAMP / 560 SERIES

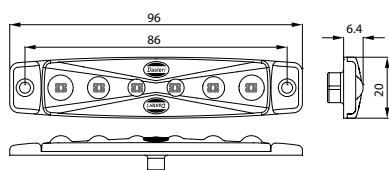


ECE APPROVED EMC APPROVED

REF. No  
**560-0.06/12** 12 Volt  
**560-0.06/24** 24 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

### LED REAR MARKER LAMP / 560L LONG VERSION




ECE APPROVED EMC APPROVED

REF. No  
**560L-0.06/12** 12V For Surface Mounting  
**560L-0.06/24** 24V For Surface Mounting

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V  
**Consumption:** 12V: 1.5W 24V: 0.9W  
**Type of Protection:** IP67

### LED REAR MARKER LAMP

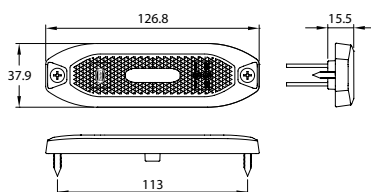

ECE APPROVED EMC APPROVED  
 SAE DOT APPROVED


REF. No  
**DSL-590.06** With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** 1.5W  
**Type of Protection:** IP67



### LED REAR MARKER LAMP

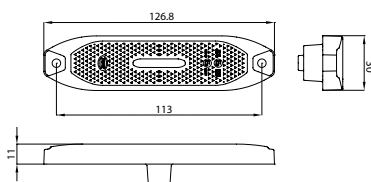


ECE APPROVED EMC APPROVED  
 SAE DOT APPROVED

REF. No  
**DSL-595.06** With Reflex Reflector

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 10-30V  
**Consumption:** 1.5W  
**Type of Protection:** IP67

### LED REAR POSITION MARKER LAMP

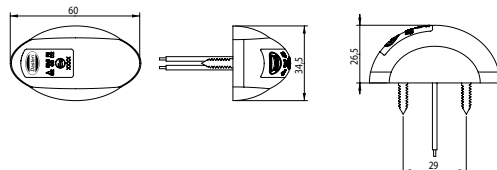


ECE APPROVED

REF. No  
**DSL-580.06** Red lens

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 10-30V DC  
**Consumption:** (12V/24V) 0,7W/1,4W  
**Type of Protection:** IP67

### LED REAR MARKER LAMP



ECE APPROVED EMC APPROVED


REF. No  
**550-0.06** With 1m cable  
**550-0.06TS** With click-in system and 0,5m cable  
**550-0.06TS15** With click-in system and 1,5m cable.

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 9 -33V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67



### LED REAR MARKER LAMP




REF. No  
**DSL-3082/12** Rear 12 Volt  
**DSL-3082/24** Rear 24 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W

ECE APPROVED

### LED REAR MARKER LAMP




REF. No  
**543-0.06C/12** 12 Volt  
**543-0.06C/24** 24 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

### LED REAR MARKER LAMP




REF. No  
**542-0.06/24** 24 Volt with 25cm cable  
**542E0-0.06** Economy Line, 10-30V, cable  
**542E1-0.06** Economy Line, 10-30V, With 2-pole Connector

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

### LED REAR MARKER LAMP 24V




REF. No  
**DSL-24.606**

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

### REAR MARKER LAMP




REF. No  
**530-0.06**

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 24V DC  
**Consumption:** 0,5W  
**Type of Protection:** IP67

ECE APPROVED

### REAR MARKER LAMP




REF. No  
**618.06**

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1X5W

ECE APPROVED

### REAR MARKER LAMP




REF. No  
**8060/43.06** Rear marker lamp  
**P-8060-43.06** Spare lens, Red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER LAMP




REF. No  
**8060/39.06** 12 Volt

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER & D.I. LAMP




REF. No  
**8080-30.065** Rear marker lamp  
**P-8080-30.065** Spare lens

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W, 1x18W

### REAR MARKER LAMP




REF. No  
**8080/31.06**  
**P-8080-31.06** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER LAMP




REF. No  
**8080/25** Red lens  
**P-8080-25** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Reflex Reflector  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

ECE APPROVED

### REAR MARKER LAMP




REF. No  
**133.06** Red lens  
**P-133.06** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER LAMP




REF. No  
**8080/51A.06** Red lens  
**P-8080-51A.06** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER & D.I. LAMP




REF. No  
**8080/51.06** Red lens  
**P-8080-51.06** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker, Direction Indicator  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

### REAR MARKER LAMP



REF. No  
**8080/29.06** Red lens  
**P-8080-29.06** Spare lens, red

TECHNICAL SPECIFICATIONS

**Functions:** Rear Marker  
**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W



---

# INTERIOR LAMPS


— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)







### INTERIOR LED LAMP / DSBTA SERIES

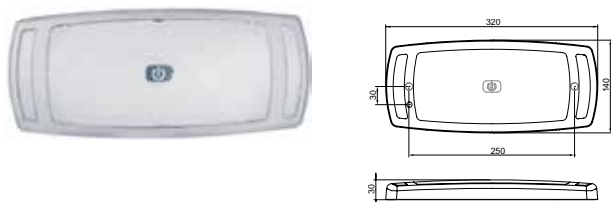


REF. No  
**DSBTAW.ND.G** LED Interior Lamp without Button  
**DSBTAW.ND.GB** LED Interior Lamp with Button

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Consumption:** 5W-6W  
**Type of Protection:** IP67

### LED INTERIOR LAMP DSPN SERIES

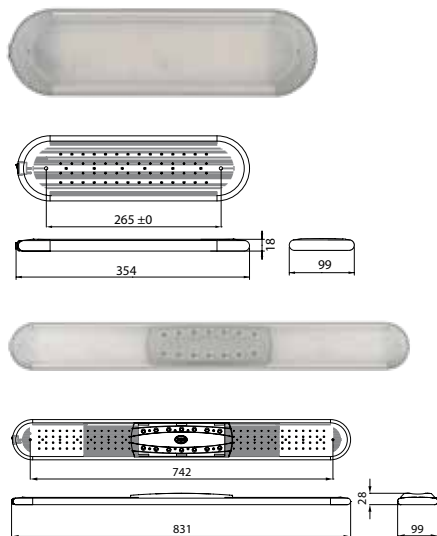


REF. No  
**DSPN1228WNB** 28 clear LEDs, 3 blue night LEDs (with switch) 234mm, 12V  
**DSPN2428WNB** 28 clear LEDs, 3 blue night LEDs (with switch) 234mm, 24V  
**DSPN60WNB** 60 clear LEDs, 6 blue night LEDs (with switch) 353mm, 10-30V  
**DSPN84WNB** 84 clear LEDs, 9 blue night LEDs (with switch) 472mm, 10-30V  
**DSPN144WNB** 140 clear LEDs, 15 blue night LEDs (with switch) 710mm, 10-30V  
**DSPN120WNB** 112 clear LEDs, 12 blue night LEDs (with switch) 831mm, 10-30V (with design blue LED trim option)

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** From 2,5W to 12,5W

### LED INTERIOR LAMP DSPE SERIES

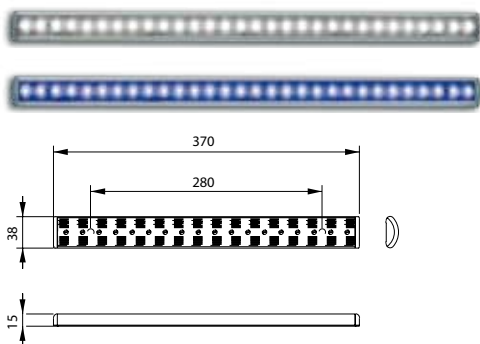

REF. No  
**DSPE-1230** with 30 LEDs, 12V, 610mm  
**DSPE-2430** with 30 LEDs, 24V, 610mm  
**DSPE-1218** with 18 LEDs, 12V, 370mm  
**DSPE-2418** with 18 LEDs, 24V, 370mm  
**DSPE-1206** with 6 LEDs, 12V, 130mm  
**DSPE-2406** with 6 LEDs, 24V, 130mm  
**add .08** for blue lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** From 0,5W to 1,5W

\* Drawing is for 370mm version

### LED SPOT DSSPD SERIES




REF. No  
**DSSPD12W6.W** 12 Volt, White base  
**DSSPD24W6.W** 24 Volt, White base  
**DSSPD12W6.G** 12 Volt, Grey base  
**DSSPD24W6.G** 24 Volt, Grey base

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12/24V) 1,2W / 1,2W  
**Operating Temperature:** -30 °C to +85 °C  
**Type of Protection:** IP67



### LED INTERIOR LAMP DSTA SERIES

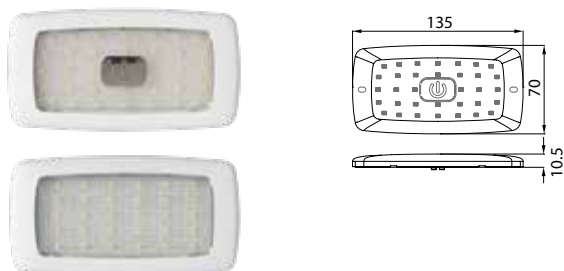


REF. No	
<b>DSTA12W34B</b>	34 white LEDs, OUTSIDE LOOK: Clear lens with touch button
<b>DSTA24W34B</b>	34 white LEDs, OUTSIDE LOOK: Clear lens with touch button
<b>DSTA12W30</b>	30 white LEDs, OUTSIDE LOOK: Clear lens
<b>DSTA24W30</b>	30 white LEDs, OUTSIDE LOOK: Clear lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12V/24V) 2W/3W

### LED INTERIOR LAMP DSTC SERIES

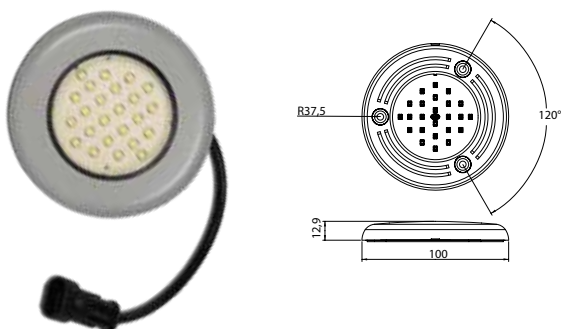

REF. No	
<b>DSTC12W24</b>	24 white LEDs, 12V
<b>DSTC24W24</b>	24 white LEDs, 24V
<b>DSTC12R24</b>	24 red LEDs, 12V
<b>DSTC24R24</b>	24 red LEDs, 24V
<b>DSTC12B24</b>	24 blue LEDs, 12V
<b>DSTC24B24</b>	24 blue LEDs, 24V
<b>DSTC12Y24</b>	24 amber LEDs, 12V
<b>DSTC24Y24</b>	24 amber LEDs, 24V

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12V/24V) 1,5W/2W


### LED INTERIOR LAMP DS-SL SERIES




REF. No	
<b>DS-SL-12.18</b>	White LEDs, 12V
<b>DS-SL-24.18</b>	White LEDs, 24V
<b>DS-SL-24.1805</b>	Amber LEDs, 24V
<b>DS-SL-24.1806</b>	Red LEDs, 24V
<b>DS-SL-24.1808</b>	Blue LEDs, 24V

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** (12V/24V) 1W/1,5W



### LED INTERIOR LAMP

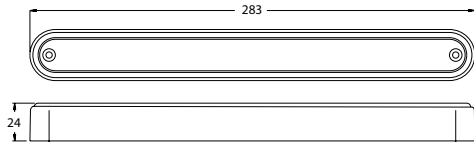

EMC APPROVED

REF. No

**DSL-24.1207** 24 Volt


**DSL-12.1207** 12 Volt

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC

**Consumption:** (12/24V) 0,6W / 1W

### INTERIOR FLEXIBLE LAMP DSL-GN01



REF. No


**DSL-GN01**

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC

**Consumption:** 1.6W

### LED ZONE LIGHT DSL-Z SERIES



REF. No

**DSL-Z36** 1000lm


TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC

**Consumption:** 11W

**Type of Protection:** IP67

### LED ZONE LIGHT DSL-Z SERIES



REF. No

**DSL-Z24** 750lm


TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC

**Consumption:** 10W

**Type of Protection:** IP67

### LED ZONE LIGHT DSL-Z SERIES



REF. No

**DSL-Z18** 500lm


TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC

**Consumption:** 9W

**Type of Protection:** IP67

### LED ZONE LIGHT DSL-Z SERIES




REF. No  
**DSL-Z12/12** 500lm, 12 Volt  
**DSL-Z12/24** 500lm, 24 Volt

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2,5W  
**Type of Protection:** IP67

### LED ZONE LAMP / DSL-Z12N




REF. No  
**DSL-Z12N** LED Zone Lamp

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 6W  
**Type of Protection:** IP67

### LED INTERIOR LAMP




REF. No  
**DSSP3W65** With 3 LEDs

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC  
**Consumption:** 3,5W

### LED INTERIOR LAMP

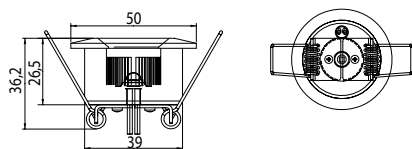


REF. No  
**DSSP1W40** With 1 LED

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 9-33V DC  
**Consumption:** 1,5W

### PROFILE CORRIDOR LED LAMP DSPK SERIES

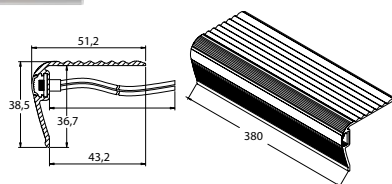


REF. No  
**DSPK24W380WP** White colour LEDs  
**DSPK24Y380WP** Amber colour LEDs  
**DSPK24R380WP** Red colour LEDs  
**DSPK24B380WP** Blue colour LEDs

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 24V DC  
**Consumption:** From 1,5W to 2,6W

### LED INTERIOR LAMP DSSPC SERIES




REF. NO.  
**DSSPCWW10C** Interior LED lamp 1000 lm 10-30V  
**DSSPC12WW6C** Interior LED lamp 500 lm 12V  
**DSSPC24WW6C** Interior LED lamp 500 lm 24V

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC

### INTERIOR LAMP




REF. No

- PL-060/12V** 12 Volt with built-in electronically operated converter
- PL-060/24V** 24 Volt with built-in electronically operated converter

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 18W

### INTERIOR LED LAMP




REF. No

- DSTL-710** Dual Voltage

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 8W

### INTERIOR LAMP




REF. No

- PL-040/12V** 12 Volt with built-in electronically operated converter
- PL-040/24V** 24 Volt with built-in electronically operated converter

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 6W

### INTERIOR LAMP




REF. No

- PL-050** White Lens

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 1x3W

### INTERIOR LAMP




REF. No

- PL-045** With clear lens & plastic trim
- PL-045N** With clear lens & chrome-type trim

TECHNICAL SPECIFICATIONS

- Operating Voltage:** 12 or 24V DC
- Consumption:** 2x5W

**INTERIOR LAMP**




REF. No  
**PL-048** With clear lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x5W or 2x10W

**INTERIOR LAMP**




REF. No  
**PL-101** With clear lens & switch  
**PL-102** With clear lens

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 2x5W

**INTERIOR LAMP**




REF. No  
**PL-103** With clear lens & switch  
**PL-103.012** With white lens & switch

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**INTERIOR LAMP**




REF. No  
**PL-104.012** With white lens & switch

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W

**INTERIOR LAMP**



REF. No  
**PL-619.012**

TECHNICAL SPECIFICATIONS

**Operating Voltage:** 12 or 24V DC  
**Consumption:** 1x5W



---

# REFLEX REFLECTORS


— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)








**RING REFLEX REFLECTOR**



REF. No  
**DSL0400RR.06** Ring reflex reflector

ECE APPROVED


**RING REFLEX REFLECTOR**



REF. No  
**DSL-3053** Ring reflex reflector

ECE APPROVED


**TRIANGLE REFLEX REFLECTOR**



REF. No  
**D-002** Ring reflex reflector

ECE APPROVED


**TRIANGLE REFLEX REFLECTOR**



REF. No  
**D-002B** Red reflecting surface

ECE APPROVED



**TRIANGLE REFLEX REFLECTOR**



REF. No  
**D-001** Red, reflecting surface, 85 sq. cm


ECE APPROVED

### RECTANGULAR REFLEX - REFLECTOR



REF. No	
<b>P-010.05</b>	Amber
<b>P-010.06</b>	Red
<b>P-010.07</b>	Clear


### ROUND REFLEX - REFLECTOR Ø60mm



REF. No	
<b>P-040.05</b>	Amber
<b>P-040.06</b>	Red
<b>P-040.07</b>	Clear



ECE APPROVED

### ROUND REFLEX - REFLECTOR Ø80mm



REF. No	
<b>P-030.05</b>	Amber
<b>P-030.06</b>	Red
<b>P-030.07</b>	Clear

### RECTANGULAR REFLEX - REFLECTOR



REF. No	
<b>P-005.05</b>	Amber
<b>P-005.06</b>	Red
<b>P-005.07</b>	Clear



---

# WIRING KITS & VARIOUS PARTS

— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)






## CAPACITIVE SENSOR BUTTON / SERIES DSTCO


### TECHNICAL SPECIFICATIONS

**Operating Voltage:** 10-30V DC  
**Operating Temperature:** -30 °C to +85 °C  
**Consumption:** 15mA / 80mA  
**Type of Protection:** IP67




### HANDICAPPED BUTTON

REF. No  
**DSTC01B**




### BABY STROLLER BUTTON

REF. No  
**DSTC02B**



### OPEN DOOR BUTTON


REF. No  
**DSTC03B**



### START BUTTON

REF. No  
**DSTC04B**

## SWITCH FOR BATTERY MAIN LEAD




REF. No  
**GS-341**

With key. Connection to either positive or negative lead. For commercial vehicles and buses. Current supply interrupted when key removed. 2 screw contacts.  
 MAX. LOAD: 2500A at 24V for 10sec.

**GS-341K** Key for switch.

## SWITCH FOR BATTERY MAIN LEAD



REF. No  
**GS-342**

With key. Connection to either positive or negative lead. For commercial vehicles and buses. Current supply interrupted when key removed. 2 screw contacts.  
 MAX. LOAD: 1000A at 12V for 10sec.  
 500A at 24V for 10sec.

**GS-342K** Key for GS-342

## PUSH - BUTTON SWITCH



REF. No  
**F-222**

Heavy duty, standard dimensions terminals

## PUSH - BUTTON SWITCH, MOMENTARY



REF. No  
**B-222**

Heavy duty, with screws in terminals



**PUSH - BUTTON SWITCH, MOMENTARY**



REF. No  
**B-218** With screws in terminals

**SWITCH ON - OFF FOR BRAKING LIGHTS**



REF. No  
**704** Stop - STAYER

**FOR MILITARY VEHICLES**



REF. No  
**814-1-SYS** All metal housing, electrostatic paint

**FOR MILITARY VEHICLES**



REF. No  
**815-1-SYS** Plastic housing

**FUSE BOX**




REF. No  
**AS-011** 6 - pole

**6 - OR 12 POLE CABLE CONNECTOR SET**



REF. No  
**K-911-6** With 6 screw contacts, black  
**K-911-12** With 12 screw contacts, black  
**K-911-6W** With 6 screw contacts, white  
**K-911-12W** With 12 screw contacts, white

**INTERIOR BUZZER**

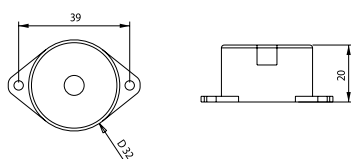

REF. No  
**DSBH888** Dual voltage (12V / 24V) 70db, tone - pulse

**BACK HORN (BUZZER)**



REF. No  
**DSBH834** Back horn dual voltage (12V / 24V) 88db in 12V and 94db in 24V, tone - pulse

**BUS SIGN UNIT**



REF. No  
**DSSI750** Bus stop light

**MIRROR ARM FOR UNIVERSAL APPLICATION**



REF. No  
**BAS-1** Right side  
**BAS-2** Left side

### ELECTRONIC FLUORESCENT INVERTERS



REF. No	VOLT	WATT	W (mm)	L (mm)	H (mm)
<b>655/12/18</b>	12	18	38	167	28
<b>655/24/18</b>	24	18	38	167	28
<b>655/12/36</b>	12	36	38	167	28
<b>655/24/36</b>	24	36	38	167	28

### EXTERNAL MIRROR



REF. No  
**KA8-1** Right - Left, with curvature  
Dimensions 260 x 175 mm

### 2 - POLE SOCKET, 1 FLAT PLUG CONTACT



REF. No  
**F-125** Ø: 18mm

### 2 - POLE SOCKET, 2 FLAT PLUG CONTACTS




REF. No  
**F-126** Ø: 18mm

### POLE PLUG



REF. No  
**F-127** 2 pole plug

### VENTILATOR FOR BUSES, TRUCKS, CAMPERS




REF. No  
**300/12V** Outside unit, 12V motor, 3500 rpm., 600 - 650 m<sup>3</sup> / hour capacity, reverse capability.

**300/24V** Outside unit, 24V motor, 3500 rpm., 600 - 650 m<sup>3</sup> / hour capacity, reverse capability

Colors: Black or white


### CLOSING MECHANISM FOR 300/12 & 300/24



REF. No  
**300/1** Closing mechanism for ventilators 300/12 & 300/24


Colors: Black or white

### MOUNTING BASE SIDE INSTALLATION



REF. No  
**MB10** Base for installation of series: DLL, DLS, DXL, DXS


**MOUNTING BASE**  
SURFACE INSTALLATION



REF. No  
**MB15**

Base for installation of series: DLL, DLS, DXL, DXS


**FLEXIBLE MOUNTING BASE**  
FASTENING ON TUBE



REF. No  
**MB20**

Mounting base


**CHROME RING**



REF. No  
**SET-18N**

With metallic base application:  
For LED round lamps and series 3100

**CHROME RING**



REF. No  
**SET-17N**

With metallic base application:  
For lamps with ref. 8080/18 and 8080/17


**CHROME RING**



REF. No  
**SET-230N**

For lamps with ref. no DSL-230  
and all lamps of 122mm diameter

**BASE FOR FLUSH FITTING**



REF. No  
**BASE-DS-SL**

For interior lamps with 18 LEDs

**ANGLED BRACKET**



REF. No  
**SET-530** For side marker lamps of series 530, 540  
**SET-550** For side marker lamps of series 550  
**SET-560** For side marker lamps of series 560

**DUAL CABLE**



REF. No  
**TH-032-02** Dual cable with “click-in system” 500mm

**BULB HOLDER**



REF. No  
**BH-0143** For side marker lamps

**BULB HOLDER**



REF. No  
**BH-0143C** With dual cable and isolation

**BULB HOLDER**



REF. No  
**BH-0143CC** With hard dual cable and cover

**MOUNTING TUBE - RUBBER CAP**



REF. No  
**411.01** For use with beacons 411/12V, 411/24V, 431/12V, 431/24V, 421/12V, 421/24V, 441/DV, 446/DV  
 Height: 100mm, Ø 24mm

**MOUNTING TUBE - THREADED M14 RUBBER CAP**




REF. No  
**411.02** For use with beacons 411/12V, 411/24V, 431/12V, 431/24V, 421/12V, 421/24V, 441/DV, 446/DV, 461, 466/DV  
 Height: 100mm, Ø 24mm


**ADAPTOR FOR BASE OF BEACON SEREIES 430**



REF. No  
**SET-EXBA430**

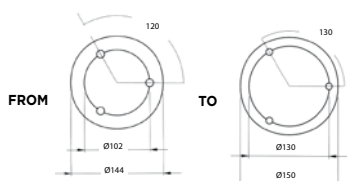

### LEAD LOAD MODULE



REF. No

**DSL-MDL/12** Led load module 12V

**DSL-MDL/24** Led load module 24V

### JUNCTION BOX WITH FEMALE CONNECTORS




REF. No

**K-918F**

For trailer wiring systems

### FEMALE CONNECTOR

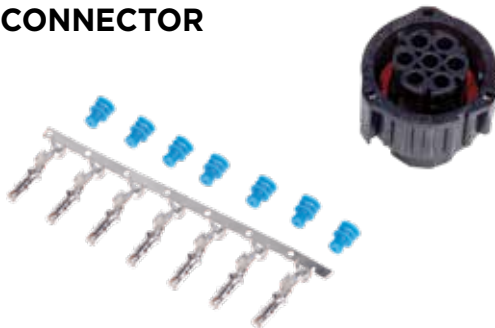

REF. No

**SET-F-1,5**

For 1,5mm PINS

### FEMALE CONNECTOR




REF. No

**SET-F-2094**

For rear lamps R-2094SR and L-2095SR

### MODULE BOX FOR SIDEMARKER / D.I.

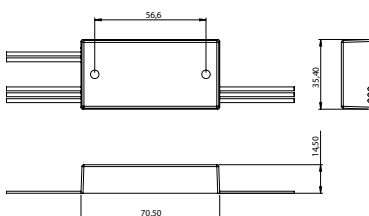

REF. No

**DSL-MDI**

Module Box for Sidemarker and Direction Indicator (dual usage). Multivoltage 10-30V DC, One module box needed for both lines

**CREATE YOUR OWN WIRING KIT**



- Step 1:** Choose **WIRING KIT** version from drawings
- Step 2:** Choose **TAIL LAMP** from **A LIST**
- Step 3:** Choose **SIDE MARKER LAMP** from **B LIST**
- Step 4:** Choose **MARKER LAMP** from **C LIST**
- Step 5:** Choose **END-OUTLINE MARKER LAMP** from **D LIST**
- Step 6:** Choose **NUMBER PLATE LAMP** from **E List**

Examples of final Ref codes:

**WKJ - A5B2C1D2E3** or **WK - A5B2C1D2E4**


For **Junction Box version** choose **WKJ-**

For **Non-Junction Box version** choose **WK-**

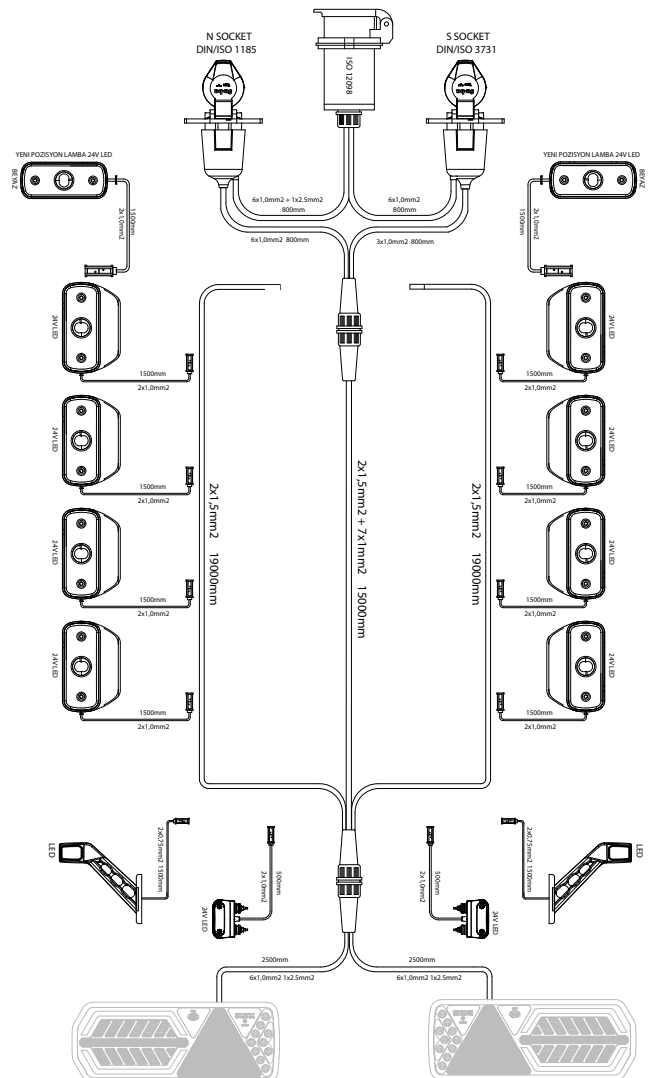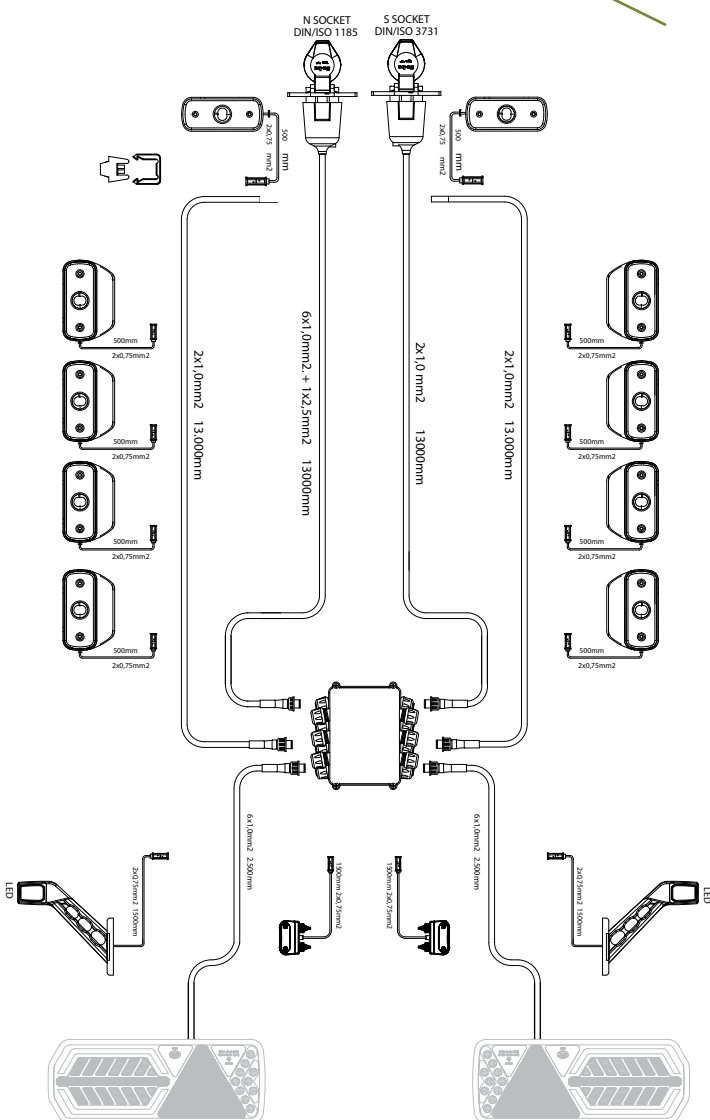



**CREATE YOUR OWN WIRING KIT**

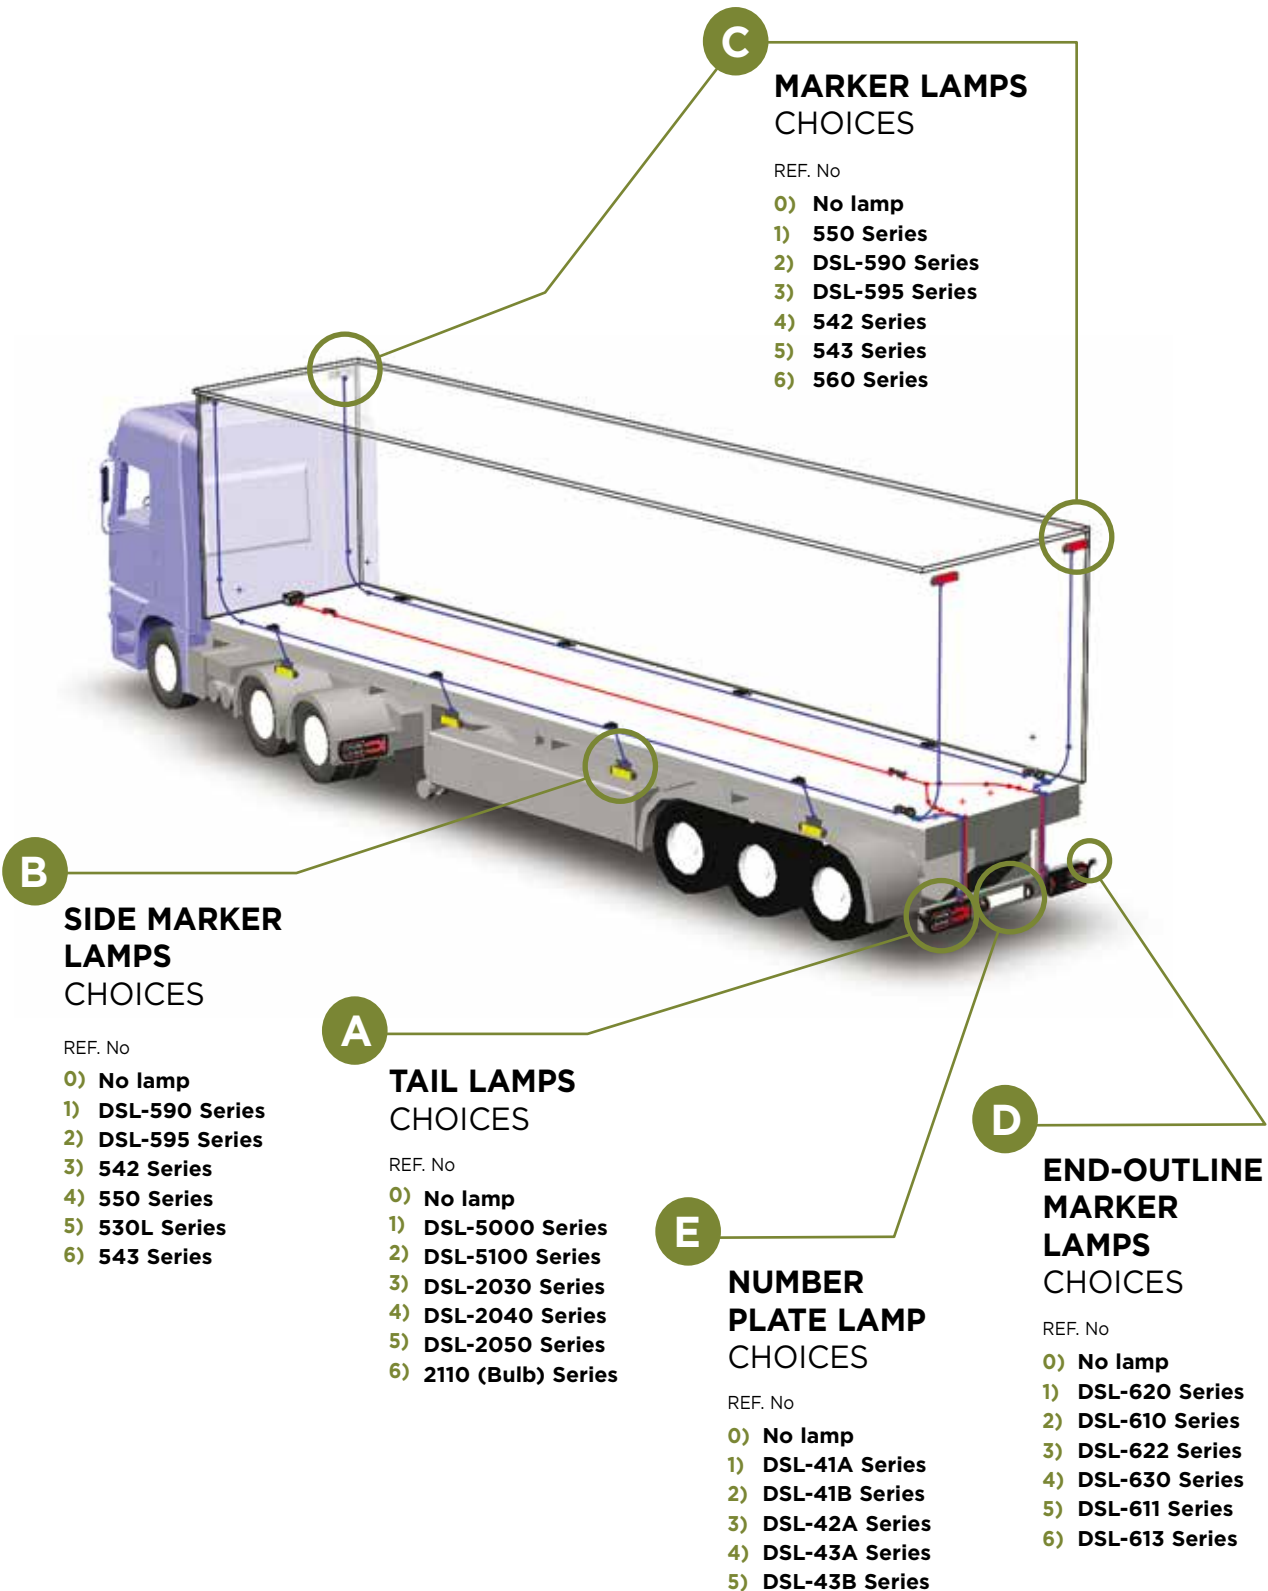

\* The above mentioned Dasteri lamps are indicative. Any combination of Tail, Side Marker, Front Position, End-Outline marker lamps is available upon request. \*\* For custom wire dimensions please contact us.



REF. No	PAGE	REF. No	PAGE	REF. No	PAGE	REF. No	PAGE
704	139	410/12.06	16	425M/12.08	21	512-1.05	102
2010	48	410/12.08	16	425M/12.09	21	512-1.06	102
2012	48	410/24.05	16	425M/24.05	21	512-1.067	102
2021	48	410/24.06	16	425M/24.06	21	512-2.05	102
4000	51	410/24.08	16	425M/24.08	21	512-2.06	102
4001	60	410M/12.05	16	425M/24.09	21	512-2.067	102
4100	51	410M/12.06	16	426/12.05	21	513-0.05	102
4200	49	410M/12.08	16	426/12.06	21	513-0.06	102
4300	49	410M/24.05	16	426/12.08	21	513-0.067	102
4350	50	410M/24.06	16	426/12.09	21	513-1.05	102
610.065	101	410M/24.08	16	426/24.05	21	513-1.06	102
610.067	101	411.01	142	426/24.06	21	513-1.067	102
611.065	101	411.02	142	426/24.08	21	513-2.05	102
611.067	101	411/12.05	16	426/24.09	21	513-2.06	102
612.065	101	411/12.06	16	430/12.05	17	513-2.067	102
612.067	101	411/12.08	16	430/12.06	17	520-0	112
613.065	101	411/24.05	16	430/12.08	17	520-1	112
615.065	100	411/24.06	16	430/24.05	17	520-2	112
615.067	100	411/24.08	16	430/24.06	17	530-0.05	113
616.065	101	412/12.05	16	430/24.08	17	530-0.06	121
616.067	101	412/12.06	16	430M/12.05	17	530-0.07	118
622.567	100	412/12.08	16	430M/12.06	17	530-2.05	113
1070-M004	67	412/24.05	16	430M/12.08	17	530L-0.05/12	107
1070-M004.05	67	412/24.06	16	430M/24.05	17	530L-0.05/24	107
1070-M022	60	412/24.08	16	430M/24.06	17	530L-2.05/12	107
1070-M042	75	420/12.05	20	430M/24.08	17	530L-2.05/24	107
1070-M122	52	420/12.06	20	431/12.05	17	530L-2.05TS	107
1070-M142	83	420/12.08	20	431/12.06	17	531-0.05	110
1070-M162	79	420/12.09	20	431/12.08	17	531-P2.05	110
130-G	89	420/12-24.05	19	431/24.05	17	532-2.05	110
130-G/g	89	420/12-24.06	19	431/24.06	17	532-2.05TS	110
130-GG/M	89	420/12-24.08	19	431/24.08	17	533-0.05	111
130-P	89	420/12-24.09	19	432/12.05	17	534-2.05	111
130-P/g	89	420/24.05	20	432/12.06	17	534-2.05TS	111
133.05	114	420/24.06	20	432/12.08	17	535-0.05	103
133.06	123	420/24.08	20	432/24.05	17	536-0.05	103
140/52	53	420/24.09	20	432/24.06	17	540-0.05/12	108
145/52.065	53	420M/12.05	20	432/24.08	17	540-0.05/24	108
2000 SERIES	48	420M/12.06	20	440/DV410.05	14	540-2.05/12	108
2000.110 SERIES	48	420M/12.08	20	440/DV410.06	14	540-2.05/24	108
2030 SERIES	41	420M/12.09	20	440/DV410.08	14	541-0.05/24	108
2040 SERIES	42	420M/24.05	20	440/DV430.05	14	541-2.05/24	108
2050 SERIES	43	420M/24.06	20	440/DV430.06	14	542-0.05/12	106
2060 SERIES	44	420M/24.08	20	440/DV430.08	14	542-0.06/24	121
2060D SERIES	44	420M/24.09	20	440M/DV410.05	14	542-0.07/24	116
2070 SERIES	44	420M/12-24.05	19	440M/DV410.06	14	542-0.07TS	117
2076 SERIES	45	420M/12-24.06	19	440M/DV410.08	14	542-2.05TS	106
2080 SERIES	45	420M/12-24.08	19	440M/DV430.05	14	542E0-0.05	106
2090 SERIES	45	420M/12-24.09	19	440M/DV430.06	14	542E0-0.06	121
2100 SERIES	46	421/12.05	20	440M/DV430.08	14	542E0-0.07	116
2110 SERIES	47	421/12.06	20	441/DV410.05	14	542E1-0.05	106
300/1	140	421/12.08	20	441/DV410.06	14	542-P2.05/12	106
300/12V	140	421/12.09	20	441/DV410.08	14	542-P2.05/24	106
300/24V	140	421/12-24.05	19	441/DV430.05	14	542E1-0.06	121
3000.05	65	421/12-24.06	19	441/DV430.06	14	542E1-0.07	116
3001.06	55	421/12-24.08	19	441/DV430.08	14	543-0.05C	109
3002.06	83	421/12-24.09	19	460/12-24.05	18	543-0.06C/12	121
3003.06	79	421/24.05	20	460/12-24.06	18	543-0.06C/24	121
3004.07	74	421/24.06	20	460/12-24.08	18	543-0.07C/12	116
3100.05	65	421/24.08	20	460/12-24.09	18	543-0.07C/24	116
3101.06	55	421/24.09	20	460M/12-24.05	18	543-2.05C	109
3102.06	83	425/12.05	21	460M/12-24.06	18	543-P2.05C	109
3103.06	79	425/12.06	21	460M/12-24.08	18	543-P2.05TS	109
3104.07	74	425/12.08	21	460M/12-24.09	18	550-0.05	105
400/12.05	21	425/12.09	21	461/12-24.05	18	550-0.05D	105
400/12.06	21	425/24.05	21	461/12-24.06	18	550-0.05TS	105
400/12.08	21	425/24.06	21	461/12-24.08	18	550-0.05TS15	105
400/24.05	21	425/24.08	21	461/12-24.09	18	550-0.06	120
400/24.06	21	425/24.09	21	512-0.05	102	550-0.06TS	120
400/24.08	21	425M/12.05	21	512-0.06	102	550-0.06TS15	120
410/12.05	16	425M/12.06	21	512-0.067	102	550-0.07	115

REF. No	PAGE	REF. No	PAGE	REF. No	PAGE	REF. No	PAGE
550-0.07TS	115	8080/21	54	DLS-SFL.08	13	DSL-2300 SERIES	32
550-0.07TS15	115	8080/23	54	DLS-SFL.09	13	DSL-2300TR SERIES	32
550-2.05	105	8080/24	61	DRTL-108	60	DSL-230STD	36
560-0.05/12	104	8080/25	123	DRTL-205	59	DSL-24.1206	82
560-0.05/24	104	8080/26	117	DRTL-206	59	DSL-24.1207	128
560-0.06/12	120	8080/27	114	DRTL-207	59	DSL-24.305	109
560-0.06/24	120	8080/28	114	DRTL-208	59	DSL-24.306	119
560-0.07/12	115	8080/28.08	114	DSBH834	139	DSL-24.307	116
560-0.07/24	115	8080/29.05	114	DSBH888	139	DSL-24.308	116
560-2.05/12	104	8080/29.06	123	DSBTAW.ND.G	126	DSL-24.606	121
560-2.05/24	104	8080/29.07	117	DSBTAW.ND.GB	126	DSL-24.607	116
560L-0.05/12	104	8080/29.08	114	DSL-035	65	DSL-24/12	73
560L-0.05/24	104	8080/29.09	114	DSL-036.05	65	DSL-24/24	73
560L-0.06/12	120	8080/30.075	118	DSL-036S	65	DSL-240FRT	36
560L-0.06/24	120	8080/31.05	113	DSL0400DIF.05	64	DSL-240STD	36
560L-0.07/12	115	8080/31.06	122	DSL0400DIF.05	64	DSL-3040/24	104
560L-0.07/24	115	8080/31.07	118	DSL0400DIR.07	64	DSL-3053	134
618.06	122	8080/32	67	DSL0400DIR.07	64	DSL-3081/12	117
618.07	118	8080/33	69	DSL0400FLR	79	DSL-3081/24	117
620.0567	100	8080/34	119	DSL0400FT	58	DSL-3082/12	121
620.0567TS	100	8080/35	67	DSL0400RR.06	134	DSL-3082/24	121
655/12/18	140	8080/36	69	DSL0400RVL	73	DSL-3090	40
655/12/36	140	8080/36.07	69	DSL0400S3	82	DSL-31002A	64
655/24/18	140	8080/37.05	69	DSL0400STL	40	DSL-31022R	39
655/24/36	140	8080/37.07	69	DSL-0500 SERIES	30	DSL-3103	78
8060/1	50	8080/51.06	123	DSL-108X.05	25	DSL-3103.07	78
8060/2	50	8080/51A.06	123	DSL-108X.06	25	DSL-31032R	78
8060/39.06	122	8080/7EL	61	DSL-108X.07	25	DSL-3104	72
8060/39.07	119	8080/7ER	61	DSL-108X.08	25	DSL-31042W	72
8060/3L	51	8080/7F	61	DSL-12.1206	82	DSL-35NA	24
8060/40L	66	8080/7OL	54	DSL-12.1207	128	DSL-35NB	24
8060/40R	66	8080/7OR	54	DSL-12FT/12	60	DSL-35NR	24
8060/41A	93	8080/7T	54	DSL-12FT/12	115	DSL-35NW	24
8060/41B	93	8080/95.06	79	DSL-12FT/24	60	DSL-4010	35
8060/42	93	8080/95.07	75	DSL-12FT/24	115	DSL-4010FR	35
8060/43.05	66	8080/95B.05	68	DSL-12RT/12	119	DSL-4020	35
8060/43.06	122	8080/96.06	79	DSL-12RT/24	119	DSL-4100	35
8060/43.07	119	8080/96.07	75	DSL-12S312	82	DSL-4100PL	35
8060/43A	93	8080/96B.05	68	DSL-12S312.06	82	DSL-41A/12	92
8060/44L	66	8080-30.065	122	DSL-12S324	82	DSL-41A/24	92
8060/44LF	66	8080-51.05	114	DSL-12S324.06	82	DSL-41B/12	92
8060/44R	66	8080-51A.05	114	DSL-180 SERIES	31	DSL-41B/24	92
8060/44RF	66	814-1-SYS	139	DSL-182AR	38	DSL-4200 SERIES	34
8060/45	53	815-1-SYS	139	DSL-182FR	38	DSL-4200RR SERIES	34
8060/45N	53	B-218	139	DSL-182FRB	38	DSL-42A/12	92
8060/46.05	69	B-222	138	DSL-2030 SERIES	28	DSL-42A/24	92
8060/46.06	55	BAS-1	139	DSL-2040 SERIES	28	DSL-43A/12	92
8060/46.06	83	BAS-2	139	DSL-2050 SERIES	29	DSL-43A/24	92
8060/46.07	75	BASE-DS-SL	141	DSL-2060 SERIES	29	DSL-43B/12	92
8060/47	68	BH-0143	142	DSL-2060D SERIES	29	DSL-43B/24	92
8060/47B	68	BH-0143C	142	DSL-2100 SERIES	30	DSL-44/12	93
8060/48.05	66	BH-0143CC	142	DSL-210DIR	64	DSL-44/24	93
8060/48.07	66	D-001	134	DSL-210FL	78	DSL-45	93
8060/4L	51	D-002	134	DSL-210FR	39	DSL-450.05	10
8060/4R	51	D-002FR	37	DSL-210RL	72	DSL-450.06	10
8060/5	50	D-002STD	37	DSL-210STDL	39	DSL-450.08	10
8060/6	50	D-002B	134	DSL-210STDLB	39	DSL-450FL.05	10
8060/8LR	51	DLL-SIM.05	13	DSL-210STDRR SERIES	38	DSL-450FL.06	10
8060/8PL	51	DLL-SIM.06	13	DSL-210STL	40	DSL-450FL.08	10
8060/9LR	51	DLL-SIM.08	13	DSL-210TDL	59	DSL-450M.05	10
8060/9PL	51	DLL-SIM.09	13	DSL-210TDLB	59	DSL-450M.06	10
8080/12	52	DLL-SFL.05	13	DSL-22/12	40	DSL-450M.08	10
8080/14	52	DLL-SFL.06	13	DSL-22/24	40	DSL-470.05	11
8080/15	52	DLL-SFL.08	13	DSL-2200 SERIES	31	DSL-470.06	11
8080/16	52	DLL-SFL.09	13	DSL-220FR	37	DSL-470.08	11
8080/17	52	DLS-SIM.05	13	DSL-220STD	37	DSL-470FL.05	11
8080/18	52	DLS-SIM.06	13	DSL-22N/12	40	DSL-470FL.06	11
8080/19	53	DLS-SIM.08	13	DSL-22N/24	40	DSL-470FL.08	11
8080/19E	61	DLS-SIM.09	13	DSL-23/12	78	DSL-470M.05	11
8080/20	53	DLS-SFL.05	13	DSL-23/24	78	DSL-470M.06	11
8080/20E	61	DLS-SFL.06	13	DSL-230FRT	36	DSL-470M.08	11



REF. No	PAGE	REF. No	PAGE	REF. No	PAGE	REF. No	PAGE
DSL-480.05	12	DSL-GHST2R	25	DSTC24W24	127	PL-048	131
DSL-480.06	12	DSL-GHST2RS	25	DSTC24Y24	127	PL-050	130
DSL-480.08	12	DSL-GHST2W	25	DSTL-710	130	PL-060/12V	130
DSL-480FL.05	12	DSL-GN01	128	DXL-5MV5M.05	15	PL-060/24V	130
DSL-480FL.06	12	DSL-HB10	58	DXL-5MV5M.06	15	PL-101	131
DSL-480FL.08	12	DSL-HBD10	58	DXL-5MV5M.08	15	PL-102	131
DSL-480M.05	12	DSL-LB10	58	DXL-5MV5M.09	15	PL-103	131
DSL-480M.06	12	DSL-LBD10	58	DXL-FL5MV.05	15	PL-103.012	131
DSL-480M.08	12	DSL-MDI	143	DXL-FL5MV.06	15	PL-104.012	131
DSL-5000 SERIES	33	DSL-MDL/12	143	DXL-FL5MV.08	15	PL-619.012	131
DSL-5000TR SERIES	33	DSL-MDL/24	143	DXL-FL5MV.09	15	RVL-LED-80	73
DSL-5100 SERIES	33	DSL-R400DIR	64	DXS-5MV5M.05	15	SET-18N	141
DSL570-0.067	96	DSL-R400FT	59	DXS-5MV5M.06	15	SET-230N	141
DSL570-0.567	97	DSL-R400STL	40	DXS-5MV5M.08	15	SET-530	142
DSL570-1.067	96	DSL-X10.05	24	DXS-5MV5M.09	15	SET-550	142
DSL570-1.567	97	DSL-X10.06	24	DXS-FL5MV.05	15	SET-560	142
DSL570-2.067	96	DSL-X10.08	24	DXS-FL5MV.06	15	SET-EXBA430	142
DSL570-2.567	97	DSL-X20.05	24	DXS-FL5MV.08	15	SET-F-1,5	143
DSL571-0.067	96	DSL-X20.06	24	DXS-FL5MV.09	15	SET-F-2094	143
DSL571-0.567	97	DSL-X20.08	24	F-125	140	SET-17N	141
DSL571-1.067	96	DSL-Z12/12	129	F-126	140	TH-032-02	142
DSL571-1.567	97	DSL-Z12/24	129	F-127	140	W150-G	89
DSL571-2.067	96	DSL-Z12N	129	F-222	138	W150-G/g	89
DSL571-2.567	97	DSL-Z18	128	GS-341	138	W151-G	89
DSL-580.05	109	DSL-Z24	128	GS-341K	138	W151-G/g	89
DSL-580.06	120	DSL-Z36	128	GS-342	138	W152-G	88
DSL-580.067	98	DSPE-1206	126	GS-342K	138	W152-G/g	88
DSL-580.07	115	DSPE-1218	126	HL-1.001	89	W153-G	88
DSL-590.05	103	DSPE-1230	126	HL-1.002	89	W153-G/g	88
DSL-590.06	120	DSPE-2406	126	K-911-12	139	W154-G	89
DSL-590.07	116	DSPE-2418	126	K-911-12W	139	W155-G	89
DSL-610.365	98	DSPE-2430	126	K-911-6	139	W160-G	88
DSL-610.367	98	DSPK24B380WP	129	K-911-6W	139	W160-GRL	74
DSL-611.365	98	DSPK24R380WP	129	K-918F	143	W161-G	88
DSL-611.367	98	DSPK24W380WP	129	LB-450.05	23	W162-G	88
DSL-612.365	99	DSPK24Y380WP	129	LB-450.06	23	W163-G	88
DSL-612.367	99	DSPN120WNB	126	LB-450.08	23	W163-GRL	74
DSL-613.365	99	DSPN1228WNB	126	LB-450M.05	23	WKJ-XXXX	144-146
DSL-613.367	99	DSPN144WNB	126	LB-450M.06	23	WK-XXXX	144-146
DSL-615.365	98	DSPN2428WNB	126	LB-450M.08	23	WRKE-LED-200F	88
DSL-615.367	98	DSPN60WNB	126	LB-500.05	22	WRKE-LED-200S	88
DSL-616.365	99	DSPN84WNB	126	LB-500.06	22	WRKE-LED-210S	88
DSL-616.367	99	DSSI750	139	LB-500.08	22	WRK-LED-100	86
DSL-620.567/12L	99	DS-SL-12.18	127	LB-500M.05	22	WRK-LED-100S	86
DSL-620.567/12R	99	DS-SL-24.18	127	LB-500M.06	22	WRK-LED-120	87
DSL-620.567/24L	99	DS-SL-24.1805	127	LB-500M.08	22	WRK-LED-150	87
DSL-620.567/24R	99	DS-SL-24.1806	127	LB-6XX.05	22	WRK-LED-150S	87
DSL-622.567	100	DS-SL-24.1808	127	LB-6XX.06	22	WRK-LED-160	87
DSL-630H567L	100	DSSP1W40	129	LB-6XX.08	22	WRK-LED-160S	87
DSL-630H567R	100	DSSP3W65	129	LBR-460.05	23	WRK-LED-180	87
DSL-630V567L	100	DSSPC12WW6C	129	LBR-460.06	23	WRK-LED-180H	87
DSL-630V567R	100	DSSPC24WW6C	129	LBR-460.08	23	WRK-LED-40F	86
DSL-650.05	103	DSSPCWW10C	129	LBR-460M.05	23	WRK-LED-40NS	86
DSL-650.05TS	103	DSSPD12W6.G	126	LBR-460M.06	23	WRK-LED-40S	86
DSL-8080/18	38	DSSPD12W6.W	126	LBR-460M.08	23	WRK-LED-80	86
DSL-8080/18.07	38	DSSPD24W6.G	126	P-005.05	135	WRK-LED-80BL	86
DSL-FF10	59	DSSPD24W6.W	126	P-005.06	135	WRKR-LED-10	88
DSL-FF10	78	DSTA12W30	127	P-005.07	135	WRKE-LED-210F	88
DSL-GHST1A	25	DSTA12W34B	127	P-010.05	135	AS-011	139
DSL-GHST1AS	25	DSTA24W30	127	P-010.06	135	KA8-1	140
DSL-GHST1B	25	DSTA24W34B	127	P-010.07	135	MB10	140
DSL-GHST1BS	25	DSTC01B	138	P-030.05	135	MB15	141
DSL-GHST1J	25	DSTC02B	138	P-030.06	135	MB20	141
DSL-GHST1R	25	DSTC03B	138	P-030.07	135		
DSL-GHST1RS	25	DSTC04B	138	P-040.05	135		
DSL-GHST1W	25	DSTC12B24	127	P-040.06	135		
DSL-GHST2A	25	DSTC12R24	127	P-040.07	135		
DSL-GHST2AS	25	DSTC12W24	127	PL-040/12V	130		
DSL-GHST2B	25	DSTC12Y24	127	PL-040/24V	130		
DSL-GHST2BS	25	DSTC24B24	127	PL-045	130		
DSL-GHST2J	25	DSTC24R24	127	PL-045N	130		





**NIK. DASTERIDIS S.A., (MFG)  
DASTERI SYSTEMS S.A.**

---

**1<sup>st</sup> km of Alexandroupoli-Ferres road  
Alexandroupoli, 68 133 Greece**

**Tel: +30 25510 25171, 33467  
Fax: +30 25510 21689  
Email: [info@dasteri.gr](mailto:info@dasteri.gr)**

**— [WWW.DASTERI.GR](http://WWW.DASTERI.GR)**

new communication